


Tools Required:

Flat head screw driver small  
Phillips head screw driver medium



Dimensions

- A: 3 1/2 "  
B: 3 3/4 "  
C: 3 3/8 "



Protection Class: IP64  
Weight: .88 lbs

Notice to Installer for 22 215:

1. See page 2 for specific product safety warnings.
2. For wall applications only.
3. Mounts directly to 19 538 small opening wiring box (provided) with T-Bar bracket (see Figure 1). **IMPORTANT: DO NOT MAKE WALL CUTOUT FOR STANDARD WIRING BOX. OPENING MUST BE MADE FOR BEGA 19 538 WIRING BOX OR CUTOUT WILL BE VISIBLE.**
4. In conformance with UL Standard 1598, a silicone based sealant must be used between luminaire and supporting wall.
5. See installation sheet 99068, supplied, for detailed instructions on 19 538 small wiring box installation.
6. LEDs are high-quality electronic components! Please avoid touching the light output opening of the LED directly during installation.

22 215 - installation:

1. Remove luminaire mounting plate by loosening (2) flat head set screws on base of fixture.
2. Feed luminaire wires through back of luminaire mounting plate.
3. Make supply wiring and luminaire wiring connections in small opening wiring box:  
MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE  
NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE  
GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE
4. Attach T-Bar bracket to 19 538 wiring box using (2) 1/2" screws.
5. Attach luminaire mounting plate to T-Bar Bracket and 19 538 wiring box by using (1) 1 1/2" 8-32 mounting screw.
6. Place a small bead of silicone around the back side of the luminaire mounting plate that will come in contact with the finished wall (exterior applications only).
7. Mount luminaire to luminaire mounting plate, making sure orientation label is aimed correctly. Tighten flat head set screws to secure.

Figure 1:


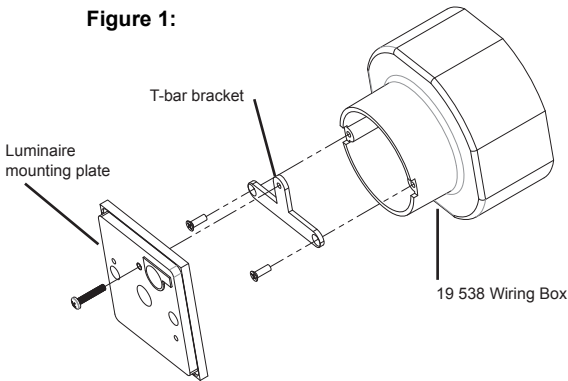


Figure 2:

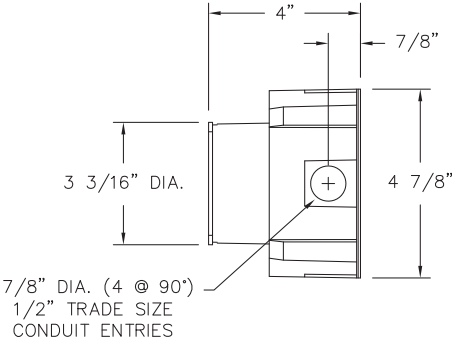

Relamping/Maintenance  
No relamping required.

Accessories  
Please refer to the appropriate accessory installation sheet for further instruction when applicable.

Wiring box 19 538

Replacement Parts	
Description	Part No
Face Plate	FP2215
Driver (120-277V)	75911
LED (3000K)	LED-0234/930
LED (4000K)	LED-0234/940

Lamp: 2.1W LED Module

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

## Product Safety Warnings:

**THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR WET LOCATIONS.**

**MIN 90°C SUPPLY CONDUCTORS.**

**CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONVIENT AUX EMPLACEMENTS MOUILLÉS.**

**LES FILS D'ALIMENTATION 90°C MIN.**