


BEGA

Photometric Filename: 12063.IES

TEST: BE_12063
 TEST LAB: BEGA
 DATE: 1/3/2018
 LUMINAIRE: 12 063
 LAMP: 9.6W LED

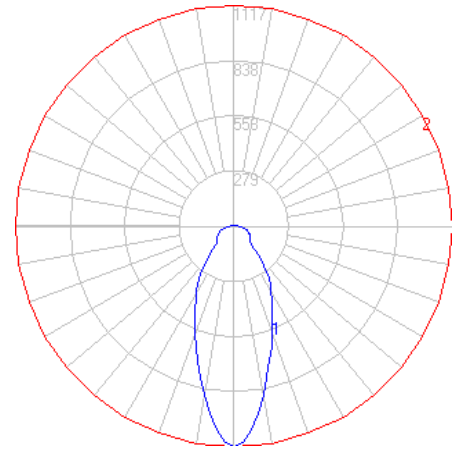


Characteristics


Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	1114
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	93
Total Luminaire Watts	12
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	0.64
Spacing Criterion (90-270)	0.64
Spacing Criterion (Diagonal)	0.76
Basic Luminous Shape	Circular w/ Sides
Luminous Length (0-180)	0.00 ft
Luminous Width (90-270)	0.39 ft (Diameter)
Luminous Height	0.24 ft

Characteristics

NEMA Type	5 H x 5 V
Maximum Candela	1116.7
Maximum Candela Angle	0 H 0 V
Horizontal Beam Angle (50%)	41.5
Vertical Beam Angle (50%)	41.5
Horizontal Field Angle (10%)	98.6
Vertical Field Angle (10%)	98.6
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Beam Lumens	294
Beam Efficiency	N.A.
Field Lumens	788
Field Efficiency	N.A.
Spill Lumens	287
Luminaire Lumens	1074
Total Efficiency	N.A.
Total Luminaire Watts	12

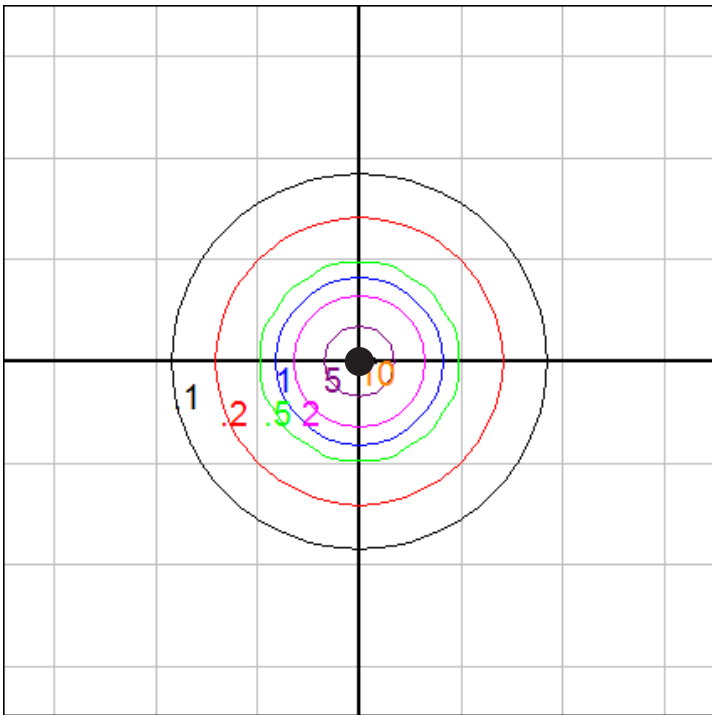

Mounting Height = 10 ft. Grid Spacing = 10 ft.

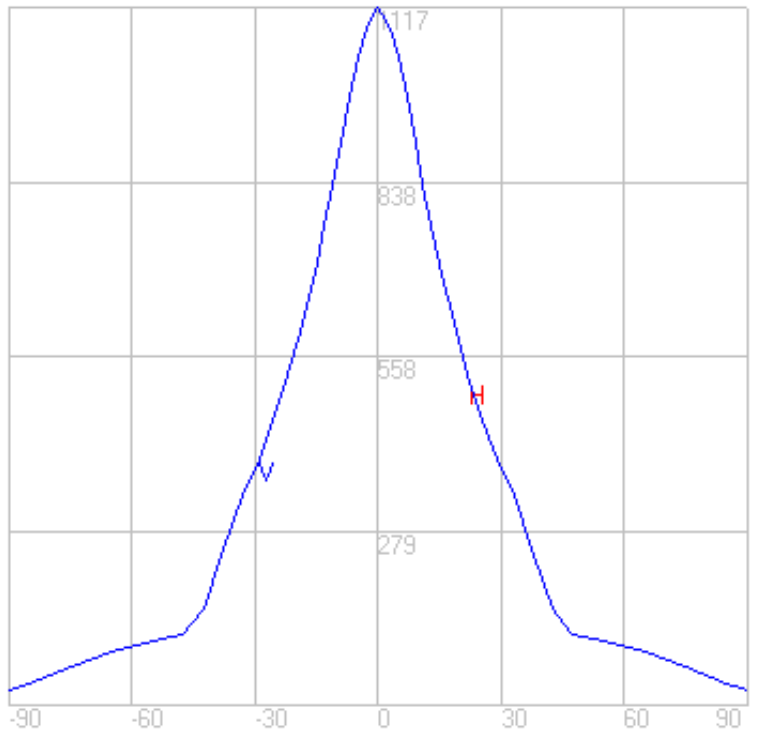

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.