


BEGA

Photometric Filename: 12065.IES

TEST: BE_12065
 TEST LAB: BEGA
 DATE: 1/18/2018
 LUMINAIRE: 12 065
 LAMP: 17.7W LED

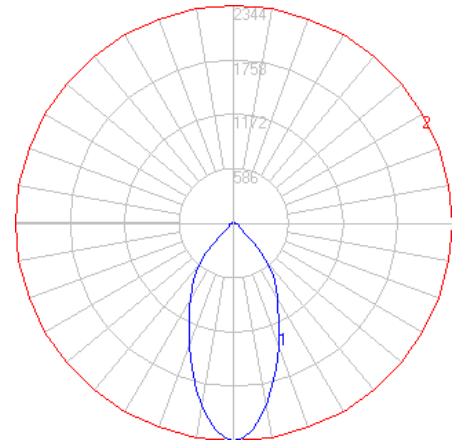


Characteristics


Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	2134
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	97
Total Luminaire Watts	22
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	0.72
Spacing Criterion (90-270)	0.72
Spacing Criterion (Diagonal)	0.84
Basic Luminous Shape	Circular w/ Sides
Luminous Length (0-180)	0.00 ft
Luminous Width (90-270)	0.62 ft (Diameter)
Luminous Height	0.31 ft

Characteristics

NEMA Type	5 H x 5 V
Maximum Candela	2343.7
Maximum Candela Angle	0 H 0 V
Horizontal Beam Angle (50%)	48.6
Vertical Beam Angle (50%)	48.6
Horizontal Field Angle (10%)	92.9
Vertical Field Angle (10%)	92.9
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Beam Lumens	904
Beam Efficiency	N.A.
Field Lumens	1863
Field Efficiency	N.A.
Spill Lumens	244
Luminaire Lumens	2107
Total Efficiency	N.A.
Total Luminaire Watts	22

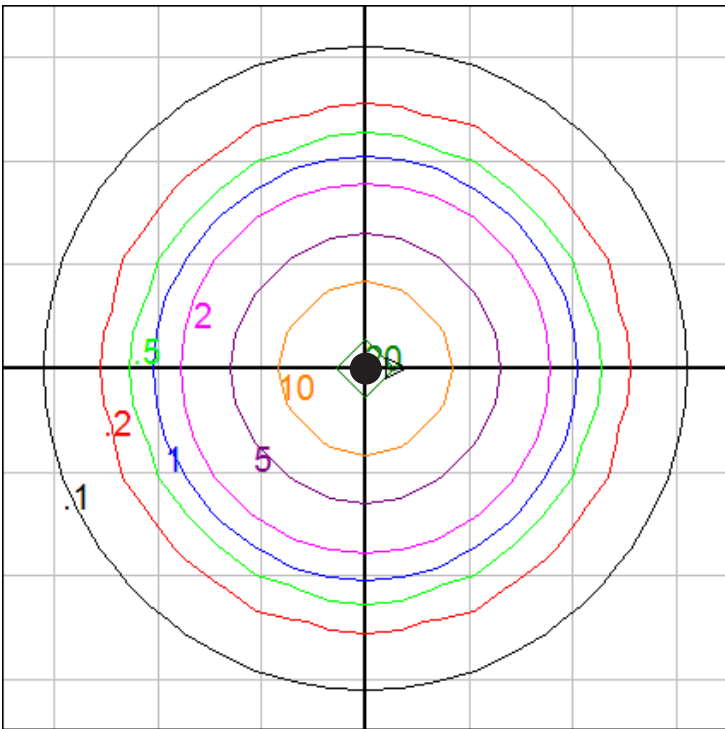

Mounting Height = 10 ft. Grid Spacing = 5 ft.

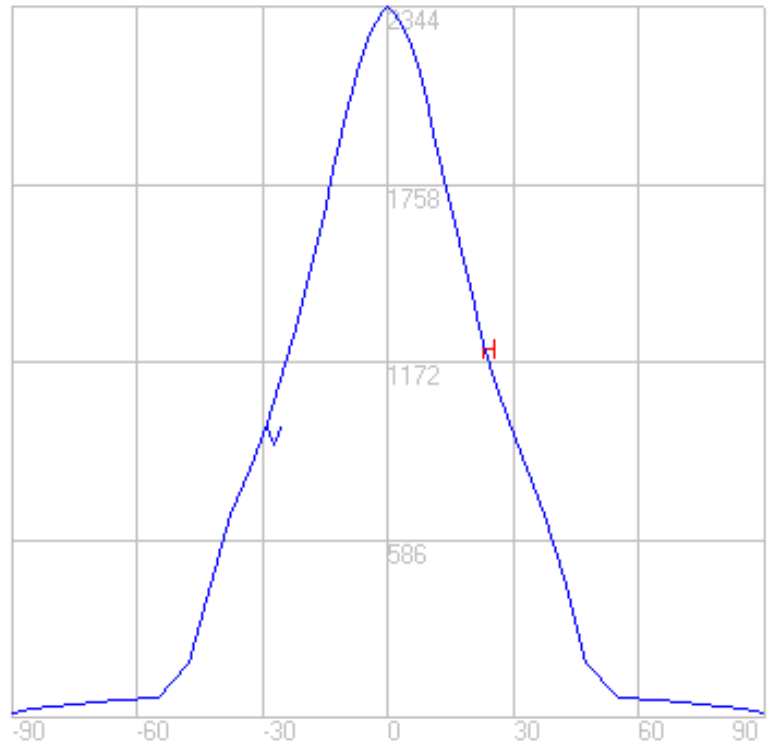

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.