

Tools Required:

- 3mm hex key
- 11/32" Nut driver
- Phillips medium screwdriver

Protection Class: IP64

Weight: 5.3 lbs.



Dimensions

- A: 5-1/8 "
- B: 9 "
- C: 6 "



Notice to Installer for 33 581:

1. Mounts directly to a standard 4" octagonal recessed wiring box (by others) using adaptor plate (supplied).
2. This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
3. LEDs are high-quality electronic components! Please avoid touching the light output opening of the LED directly during installation.

IMPORTANT: SILICONE RTV MUST BE APPLIED ON BOTH SIDES OF THE ADAPTOR PLATE TO ENSURE AGAINST WATER INTRUSION.

33 581 - Installation:

1. Loosen (2) 3mm set screws under luminaire and remove outer casting with lens.
2. Feed luminaire wires through luminaire base and adapter plate.
3. Make supply wiring and luminaire wiring connections in the wiring box:
MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE
NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE
GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE


Dimming (if applicable):

- DIMMING CONTROL WIRE (+) TO POSITIVE DRIVER DIM CONTROL WIRE
- DIMMING CONTROL WIRE (-) TO NEGATIVE DRIVER DIM CONTROL WIRE

4. Place a bead of silicone RTV around the outer edge of the back side of the adaptor plate that will come in contact with the finished wall (exterior applications only).
5. Attach adapter plate to wiring box using (2) 8-32 x 1/2" screws provided. Choose screw slots based on wiring box such that fixture will mount straight, with lens pointing downward.
6. Apply silicone RTV to outside edge of luminaire base and mount luminaire base over the mounting studs in adaptor plate. Tighten nuts (provided) to secure base.

IMPORTANT: note position of orientation arrow on mounting plate and install accordingly.

7. Replace outer casting and tighten (2) set screws, making sure the gasket is seated properly.

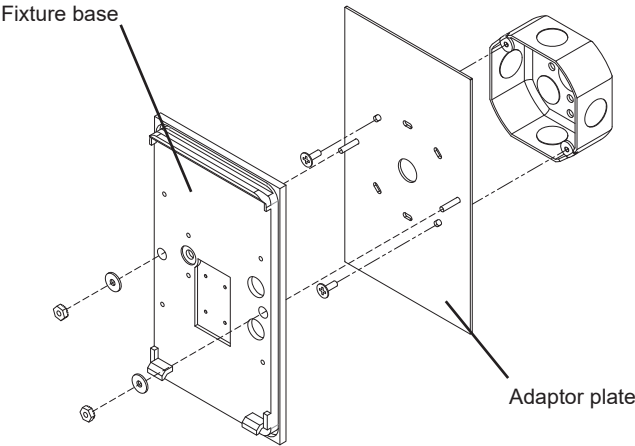

Relamping/Maintenance

No relamping required.

Accessories

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

Replacement Parts

Description	Part No
Face Plate	FP3581
Housing gasket	831219
LED driver (4000K)	76060
LED module (3000K)	LED-0683/830
LED module (4000K)	LED-0683/840

Lamp: 7.9W LED Module

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR WET LOCATIONS.

MIN 90°C SUPPLY CONDUCTORS.

CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONVIENT AUX EMPLACEMENTS MOUILLÉS.

LES FILS D'ALIMENTATION 90°C MIN.
