


Tools Required:

- 6 mm hex key
- Phillips medium screwdriver

Dimensions

- A: 6-3/8 "
- B: 1-1/2 "



Weight: 2.1 lbs.

Notice to Installer for 77 069:


1. This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
2. BEGA luminaires may be damaged if connected to conduit systems containing water - Article 300-5G of National Electric Code requires that "Conduits or raceways through which moisture may contact energized live parts shall be sealed or plugged at either or both ends".
3. Requires a 24V DC class 2 electronic power supply to operate intended LED wattage.
4. A separate wiring box suitable for outdoor locations provided by BEGA.
5. A level surface **MUST** be provided for proper installation (Fig. 1).
6. For vehicular loads, housing must be anchored to a suitable, load bearing foundation. In all other applications, foundation should be sufficient to support anticipated load onto fixture.
7. Proper drainage **MUST** be provided. Failure to do so may cause damage to luminaire and void warranty.
8. When installing fixture in organic mulch, surround installation housing with approximately 6" of sand or other non-organic material.
9. **NOTE: DO NOT OPEN FIXTURE.**

Figure 1

77 069 wiring box - installation:

1. Establish location of wiring box, and orient wiring box to accommodate for direction of anticipated illuminated surface (Fig. 2).
2. Connect conduit to wiring box using 1/2" NPT fitting with teflon tape on conduit or wiring box threads. Pull supply wire into wiring box for later electrical connections.
3. Establish foundation for anchorage (by others).
NOTE: FOUNDATION NEEDS TO BE SUFFICIENT TO SUPPORT ANTICIPATED LOAD ON TO LUMINAIRE.
4. Use mounting holes provided on wiring box flange to anchor the wiring box to suitable foundation.
IMPORTANT: THE TOP EDGE OF THE WIRING BOX MUST BE FLUSH WITH THE FINISHED SURFACE FOR PROPER INSTALLATION.
5. Finish surface.


Figure 2

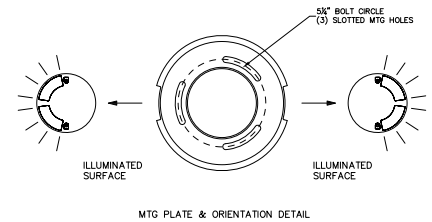

77 069 - installation:

1. Make 24V DC supply wiring and luminaire connections in wiring box using water tight wire connectors:
NEGATIVE SUPPLY WIRE TO BLACK LUMINAIRE WIRE
POSITIVE SUPPLY WIRE TO RED LUMINAIRE WIRE
NOTE: WIRE CONNECTIONS MUST BE KEPT DRY
2. Loosen (2) 4mm hex screws on outer housing and remove the bottom cover plate.
3. Attach bottom cover plate to wiring box using hardware provided.
4. Attach outer housing to bottom cover plate and secure by tightening (2) screws.
NOTE: MAKE SURE TO ALIGN THE FIXTURE HOUSING SO THE FACEPLATE PORTS WILL BE ORIENTED PER DESIGN SPECS (FIG. 3).

Figure 3



NOTE: The junction box **DOES NOT** have a gasket. Installer should seal around the lip of the fixture and the ground to prevent water entry into the junction box.

Relamping/Maintenance

Clean glass using only solvent-free cleaners.

Accessories

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

Replacement Parts

Description	Part No
Lens	112893
Lens gasket (2x)	83001729
LED module (3000K)	LED-0287/830
LED module (4000K)	LED-0287/840

Lamp: 1.3W LED Module, 24V DC

Remote 25W LED Driver and box	19 580
Remote 50W LED Driver and box	19 591

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

Product Safety Warnings:

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR WET LOCATIONS.

MIN 90°C SUPPLY CONDUCTORS.

CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONVIENT AUX EMPLACEMENTS MOUILLÉS.

LES FILS D'ALIMENTATION 90°C MIN.
