


Tools Required:

- 4mm hex key
- 5mm hex key
- Flat head screw driver medium
- Phillips head screw driver medium

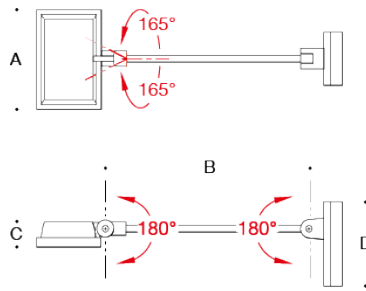

Dimensions

- A:** 5-7/8 x 9"
- B:** 27-5/8"
- C:** 2-1/4"
- D:** 4-1/8 x 9-3/8"



Protection Class: IP65

Weight: 7.7 lbs

Notice to Installer for 77 559:

1. See page 2 for specific product safety warnings.
2. This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
3. Mounts directly over a standard, vertical single gang wiring box (by others).
4. Ceiling and wall applications only.
5. In conformance with U.L. Standards 1598, a silicone-based sealant **MUST** be used between the mounting plate edge and supporting wall.
6. **WARNING:** LEDs are high quality electrical components. Please avoid touching them directly during installation.

77 559 - installation:

1. Loosen the (4) 4mm hex screw on the luminaire canopy and remove luminaire base from luminaire.
2. Feed luminaire wiring through the luminaire base and mounting plate.
3. Make supply wiring and luminaire wiring connections inside the wiring box:
 MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE
 NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE
 GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE
 Dimming (if applicable):
 DIMMING CONTROL WIRE (+) TO POSITIVE DRIVER DIM CONTROL WIRE
 DIMMING CONTROL WIRE (-) TO NEGATIVE DRIVER DIM CONTROL WIRE
4. Mount luminaire to ceiling or wall using hardware (by others). Minimum size: 8-32 screws
5. Replace luminaire canopy (with luminaire attached) and tighten (4) 4mm screws.
8. To adjust head angle, use 5mm hex key to loosen adjustment screw. Adjust luminaire head as needed and tighten adjustment screw.

Relamping/Maintenance

Clean luminaire regularly with solvent-free cleansers from dirt and debris. Do not use high pressure cleaners.

Lamp: 39.0W LED

Accessories

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

- 180 Glare Shield 70 502
- Barn Door Shield 549

Replacement Parts

Description	Part No
LED Driver (120-277V)	(1X) 75948
LED Module (2700K)	(1X) LED-0323/827
LED Module (3000K)	(1X) LED-0323/830
LED Module (3500K)	(1X) LED-0323/835
LED Module (4000K)	(1X) LED-0323/840

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

Product Safety Warnings:

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR WET LOCATIONS.

MIN 90°C SUPPLY CONDUCTORS.

CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONVIENT AUX EMPLACEMENTS MOUILLÉS.

LES FILS D'ALIMENTATION 90°C MIN.
