


**Tools Required:**

- 3mm hex head screwdriver
- Phillips head screwdriver
- Adjustable wrench
- 5mm hex head screwdriver


**Overview:**

LED Watts: 18.2W  
 System Watts: 22.0W  
 Controllability: 0-10V, TRIAC, and ELV dimmable  
 Weight: 4.4 lbs.  
 Protection Class: IP65



**Dimensions**


- A:** 5-3/4  
**B:** 9  
**C:** 3-7/8  
**D:** 4

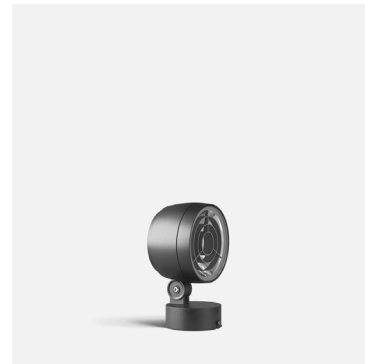

**Notice to Installer:**

1. See page 2 for specific product safety warnings.
2. In conformance with UL Standard 1598, a silicone based sealant must be used between luminaire and supporting surface.
3. Luminaire mounts directly to standard recessed 4" octagonal wiring (by others), using mounting plate provided.

**Figure 1:**

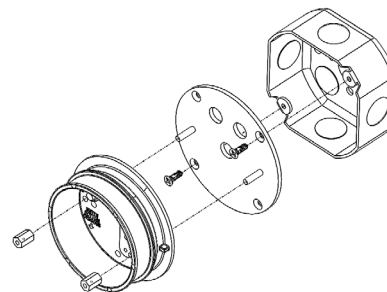

**Installation: Luminaire**

1. Loosen the (1) 3mm hex head set screw on the fixture canopy to remove luminaire base.
2. Feed luminaire wiring through the luminaire base and mounting plate into wiring box (by others).
3. Make supply wiring and luminaire wiring connections inside the wiring box:  
 MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE  
 NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE  
 GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE  
 Dimming (if applicable):  
 DIMMING CONTROL WIRE (+) TO POSITIVE DIM LUMINAIRE WIRE  
 DIMMING CONTROL WIRE (-) TO NEGATIVE DIM LUMINAIRE WIRE
4. Attach provided mounting plate directly to a 4" standard octagonal wiring box using the (2) phillips head screws (provided).
5. **Important!** Place a small bead of silicone around the back side of the mounting plate that will come in contact with the finished surface (exterior applications only). Failure to do so can cause water entry and will void warranty.
6. Place luminaire base over the mounting plate. Tighten nuts (provided) on the studs to secure. (Figure 1)
7. Replace luminaire canopy (with luminaire attached) and align to desired orientation. Tighten (1) 3mm hex head set screw to secure into place.
8. To adjust head angle, use 5mm hex head screwdriver to loosen screw at aiming joint. Aim luminaire head as needed and tighten screw to secure into place.

**Accessories**

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

Elliptical spread lens	71 120
180° Glare shield	71 118
360° Glare shield	79 829

**Maintenance:**

Clean regularly with solvent-free cleaner removing dirt and debris. Do not use high pressure cleaners.

**Replacement Parts**

See label inside of fixture for LED replacement part number.

Consult factory for all other replacement components.

**Product Safety Warnings:**

**THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR MOUNTING WITHIN 1.2 m (4 ft) OF THE GROUND. SUITABLE FOR WET LOCATIONS. MIN 60°C SUPPLY CONDUCTORS.**

**CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. PEUT ÊTRE INSTALLÉ À MOINS DE 1,2 m (4 pi) DU SOL. CONVIENT AUX EMPLACEMENTS MOUILLÉS. LES FILS D'ALIMENTATION 60°C MIN.**