

Application

Recessed wall luminaire with unshielded light that has a directing and guiding light effect. The illuminance level on the lit surface is lower, but the ambient brightness is greater with increased vertical illuminance.

Materials

- Clear safety glass with white ceramic coating
- Die-cast aluminum
- Stainless steel screw clamps
- Mechanically captive stainless steel fasteners
- High temperature silicone gasket
- Aluminum installation housing

NRTL listed to North American Standards, suitable for wet locations
Protection class IP 65

Weight: 0.5 lbs.

Electrical

| | |
|------------------------|-----------|
| LED module wattage | 2.1 W |
| System wattage | 3.0 W |
| Color rendering index | Ra > 80 |
| Luminaire lumens | 21 lm |
| LED service life (L70) | 60000 hrs |

LED color temperature

- 4000K (K4)
- 3500K (K35)
- 3000K (K3)
- 2700K (K27)

BEGA can supply you with suitable LED replacement modules for up to 20 years after the purchase of LED luminaires - see website for details

Finish

All BEGA standard finishes are matte, textured powder coat with minimum 3 mil thickness. BEGA Unidure® finish, a fluoropolymer technology, provides superior fade protection in Black, Bronze, and Silver. BEGA standard White is a super durable polyester powder. Optionally available RAL and custom color finishes provided in either polyester powder or liquid paint.

Available colors

| | |
|--------------|--------------|
| Black (BLK) | Bronze (BRZ) |
| Silver (SLV) | White (WHT) |
| RAL: | CUS: |

Type:

BEGA Product:

Project:

Modified:

Available options

| | |
|-----|------------------------|
| CUS | Custom finish |
| MGU | Marine grade undercoat |
| RAL | RAL finish |



Available accessories

| | |
|--------|----------------------------------|
| B19591 | Remote driver box · Static white |
|--------|----------------------------------|

See individual accessory spec sheet for details.

Included (available for pre-shipment)

| | |
|-----------|----------------------|
| BB2100LED | Installation housing |
|-----------|----------------------|

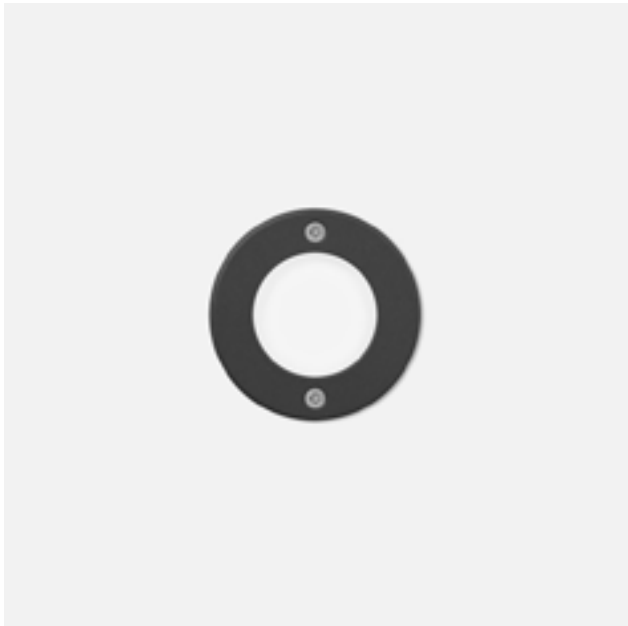

| Recessed wall luminaire · Unshielded • 24V DC | | | | |
|---|-----|-------|-------|---|
| | | LED | A | B |
| B22109 | ADA | 2.1 W | 3 1/8 | 4 |