


Tools Required:

- Flat head screw driver medium
- Phillips head screw driver medium

Weight: 1.65 lbs.

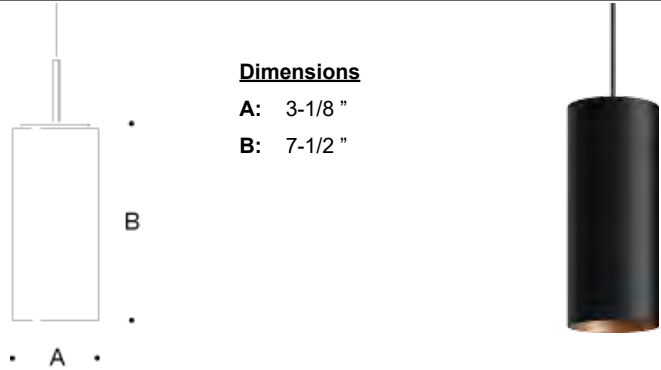

**Dimensions**  
A: 3-1/8 "  
B: 7-1/2 "


Notice to Installer for 50 244:

- See page 2 for specific product safety warnings.
- Select the desired housing material finish by using appropriate code number as suffix.
  - 50 244.2 - Velvet Black - Matte Aluminum
  - 50 244.4 - Velvet Black - Matte Brass
  - 50 244.6 - Velvet Black - Matte Copper
- Mounts directly to standard recessed 4" octagonal wiring box (by others).
- LEDs are high-quality electronic components! Please avoid touching the light output opening of the LED directly during installation.

50 244 - installation:

- Undo set screw on canopy cover and lower canopy cover from canopy baseplate.
- Undo two set screws on canopy strain relief, adjust luminaire cable to desired length, and re-tighten two set screws.
- Feed driver wires through canopy baseplate.
- Make supply wiring and driver wiring connections inside the wiring box (by others):
  - MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE
  - NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE
  - GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE
- Dimming (if applicable):**
  - DIMMING CONTROL WIRE (+) TO POSITIVE DRIVER DIM CONTROL WIRE
  - DIMMING CONTROL WIRE (-) TO NEGATIVE DRIVER DIM CONTROL WIRE
- Mount canopy baseplate directly to standard recessed 4" octagonal wiring box (by others).
- Move canopy cover up to the ceiling/canopy baseplate and tighten set screw on canopy cover to secure.

Figure 1: Mounting Canopy (Generic Image)

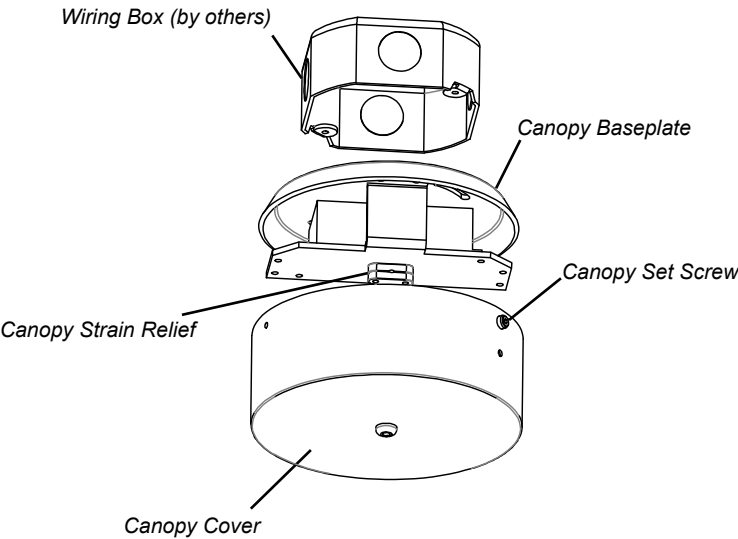

Relamping/Maintenance

Unscrew glass by turning counter-clockwise. Clean glass and luminaire using on solvent-free cleansers. Replace glass.

Accessories

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

Replacement Parts

Description	Part No
LED Driver (120-277V)	75983-04
LED Module (3000K)	LED-0689/930
LED Module (4000K)	LED-0689/940

Lamp: 7.2W LED

Tools Required:

- Flat head screw driver medium
- Phillips head screw driver medium

Weight: 1.65 lbs.




Dimensions  
A: 3-1/8 "  
B: 7-1/2 "



- 79005 - wiring box installation:**  
**Hollow (stud) ceiling construction** - Secure wiring box to wood or metal blocking. Connect conduit to wiring box (if needed) and pull wires for electrical connections to be made later.  
**Poured concrete construction** - Attach wiring box to concrete form. Connect conduit to wiring box and pull wires for electrical connections to be made later. Pour concrete and remove form.  
**IMPORTANT: Do not pour concrete directly on to box!**

- 50 244 w/Low Profile Canopy - installation:**
- Undo set screw on canopy cover and lower from canopy baseplate.
  - Undo two set screws on canopy strain relief, adjust luminaire cable to desired length, and re-tighten two set screws.
  - Make supply wiring and driver wiring connections inside the wiring box:  
MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE  
NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE  
GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE
- Dimming (if applicable):**  
DIMMING CONTROL WIRE (+) TO POSITIVE DRIVER DIM CONTROL WIRE  
DIMMING CONTROL WIRE (-) TO NEGATIVE DRIVER DIM CONTROL WIRE
- Mount canopy baseplate directly to wiring box 79005 using hardware (provided).
  - Move canopy cover up to the canopy baseplate and tighten set screw to secure.

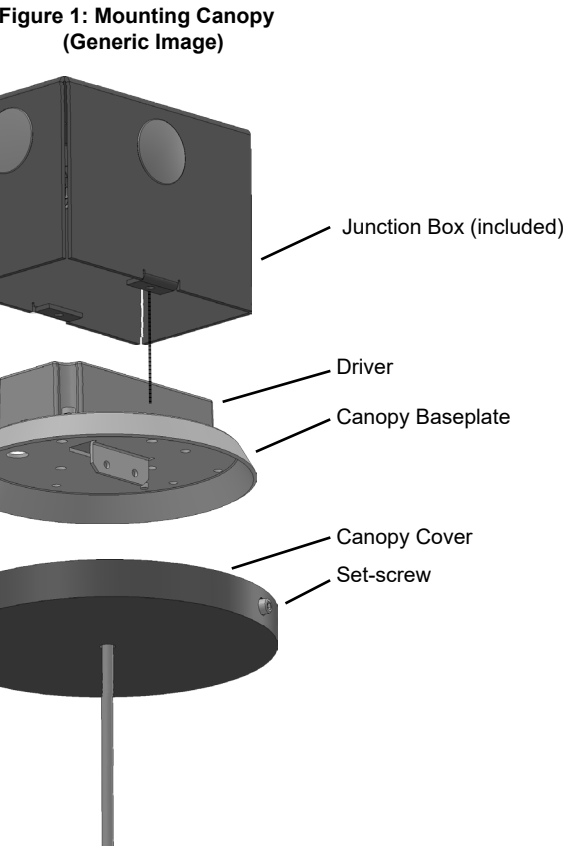

**Relamping/Maintenance**  
Unscrew glass by turning counter-clockwise. Clean glass and luminaire using on solvent-free cleansers. Replace glass.

**Accessories**  
Please refer to the appropriate accessory installation sheet for further instruction when applicable.

Replacement Parts	
Description	Part No
LED Driver (120-277V)	76121
LED Module (3000K)	LED-0689/930
LED Module (4000K)	LED-0689/940

Lamp: 7.2W LED

**Product Safety Warnings:**

**THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR DAMP LOCATIONS.**

**MIN 90°C SUPPLY CONDUCTORS.**

**CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONVIENT AUX EMPLACEMENTS HUMIDES.**

**LES FILS D'ALIMENTATION 90°C MIN.**

---