


Tools Required:

- Flat head screw driver medium
- Phillips head screw driver medium

Weight: 7.1 lbs.

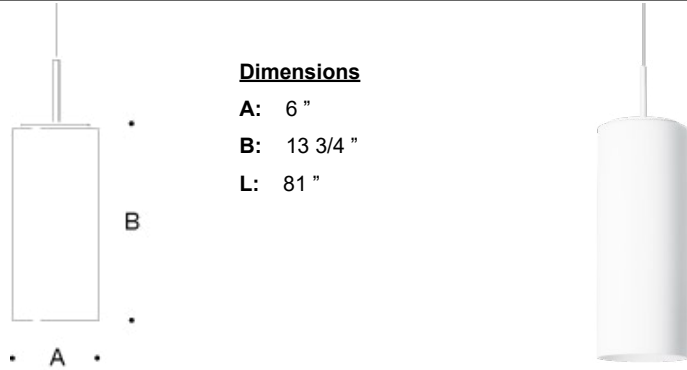

**Dimensions**  
A: 6 "  
B: 13 3/4 "  
L: 81 "


Notice to Installer for 56 607:

- See page 2 for specific product safety warnings.
- Select the desired housing material finish by using appropriate code number as suffix.  
56 607.1 - White  
56 607.3 - Chrome
- Mounts directly to standard recessed 4" octagonal wiring box (by others).
- LEDs are high-quality electronic components! Please avoid touching the light output opening of the LED directly during installation.

56 607 - installation:

- Undo set screw on canopy cover and lower canopy cover from canopy baseplate.
- Undo two set screws on canopy strain relief, adjust luminaire cable to desired length, and re-tighten two set screws.
- Feed driver wires through canopy baseplate.
- Make supply wiring and driver wiring connections inside the wiring box (by others):  
MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE  
NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE  
GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE
- Dimming (if applicable):**  
DIMMING CONTROL WIRE (+) TO POSITIVE DRIVER DIM CONTROL WIRE  
DIMMING CONTROL WIRE (-) TO NEGATIVE DRIVER DIM CONTROL WIRE
- Mount canopy baseplate directly to standard recessed 4" octagonal wiring box (by others).
- Move canopy cover up to the ceiling/canopy baseplate and tighten set screw on canopy cover to secure.

Figure 1: Mounting Canopy (Generic Image)

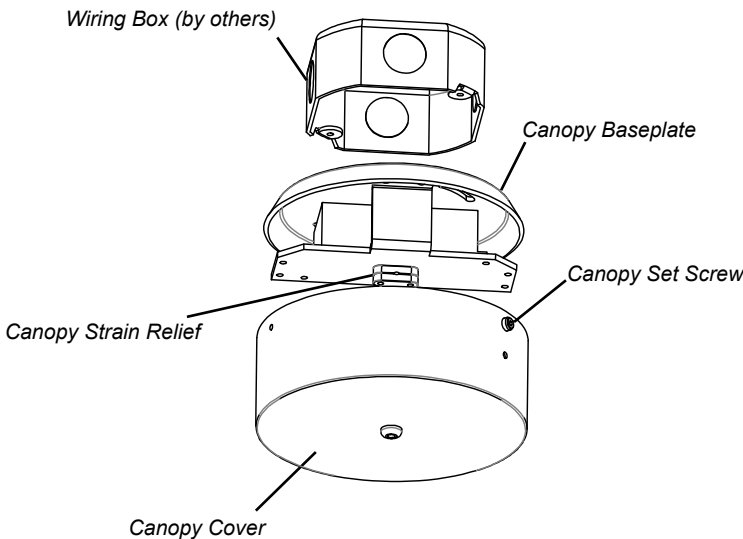

Relamping/Maintenance

Unscrew glass by turning counter-clockwise. Clean glass and luminaire using on solvent-free cleansers. Replace glass.

Accessories

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

Replacement Parts

Description	Part No
Lens	113156.0
Driver (120-277V)	75983-04
LED Module (3000K)	LED-0610/930
LED Module (4000K)	LED-0610/940

Lamp: 22.8W LED