


BEGA

Photometric Filename: 24034.IES

TEST: BE_24034
 TEST LAB: BEGA
 DATE: 6/29/2017
 LUMINAIRE: 24 034
 LAMP: 12.1W LED

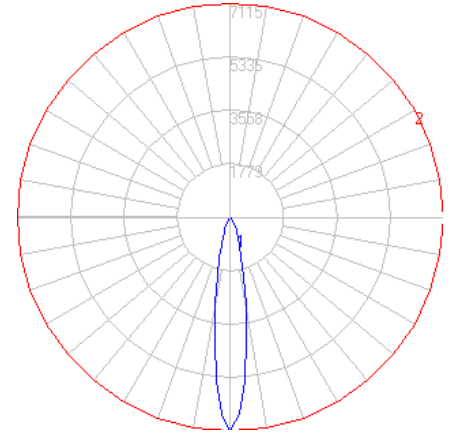


Characteristics

NEMA Type	3 H x 3 V
Maximum Candela	7115.2
Maximum Candela Angle	0 H 0 V
Horizontal Beam Angle (50%)	17.4
Vertical Beam Angle (50%)	17.4
Horizontal Field Angle (10%)	40.9
Vertical Field Angle (10%)	40.9
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Beam Lumens	363
Beam Efficiency	N.A.
Field Lumens	848
Field Efficiency	N.A.
Spill Lumens	265
Luminaire Lumens	1113
Total Efficiency	N.A.
Total Luminaire Watts	15


Lum. Classification System (LCS)

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	536.9	N.A.	48.1
FM (30-60)	20.3	N.A.	1.8
FH (60-80)	0.8	N.A.	0.1
FVH (80-90)	0.1	N.A.	0.0
BL (0-30)	536.9	N.A.	48.1
BM (30-60)	20.3	N.A.	1.8
BH (60-80)	0.8	N.A.	0.1
BVH (80-90)	0.1	N.A.	0.0
UL (90-100)	0.0	N.A.	0.0
UH (100-180)	0.0	N.A.	0.0
Total	1116.2	N.A.	100.0

BUG Rating B2-U0-G0

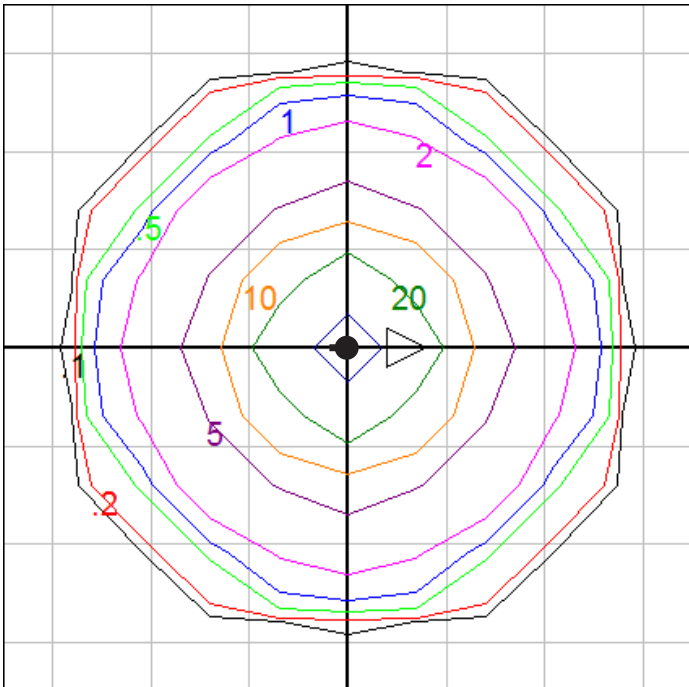

Wall mount fixture - Isofootcandle grid on floor
 Mounting Height = 10 ft. Grid Spacing = 2.5 ft.

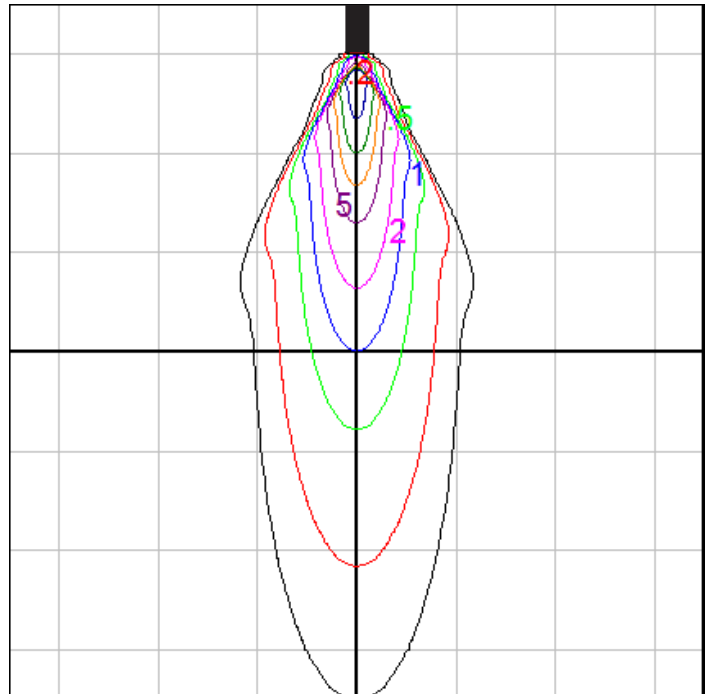

Wall mount fixture- Isofootcandle grid on wall
 Grid Spacing = 5 ft.

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.