

Tools Required:

- 3mm Hex Key

Overview:

LED Watts: 44.4W
 System Watts: 58.0W
 Controllability: 0-10V dimmable
 Weight: 23.3 lbs.
 Protection Class: IP65




Dimensions

A: 72 1/4"

B: 4 7/8"


C: 4 5/8"

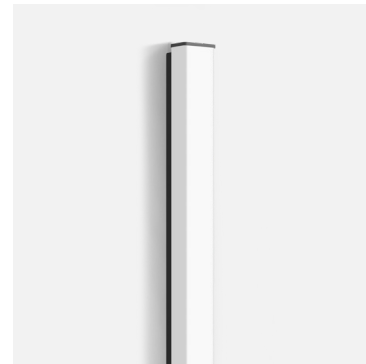

Notice to Installer:

1. See page 2 for specific product safety warnings.
2. Luminaire mounted vertically or horizontally onto a ceiling or wall directly over a single gang wiring box.
3. The wiring box must match the orientation of the luminaire.
4. The fixture base must be mounted flush to the finished surface.
5. Silicone sealant must be placed around the base, between the flush surface and luminaire.

Figure 1: Mounting Detail

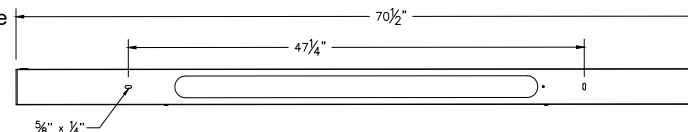

Installation: Luminaire

1. Remove the mounting bracket from the luminaire's back by loosening (2) set screws using a 3mm Hex key.
2. Detach steel safety tether from mounting plate and attach the luminaire base to the finished surface, centered over a single gang wiring box.
3. Route wires from a single gang wiring box through the center of the mounting bracket.
4. Make supply wiring connections and feed connection back into junction box:
 MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE
 NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE
 GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE
 Dimming (if applicable):
 DIMMING CONTROL WIRE (+) TO POSITIVE LUMINAIRE DIM CONTROL WIRE
 DIMMING CONTROL WIRE (-) TO NEGATIVE LUMINAIRE DIM CONTROL WIRE
5. Reattach the steel safety tether from mounting plate to luminaire base.
6. [Horizontal Mounting:] Reattached luminaire to the mounting bracket, ensuring the set screws face downward before tightening, tighten evenly.
7. [Vertical Mounting] Reattached luminaire to the mounting bracket, ensuring the set screws on the right side of the luminaire, tighten evenly.
8. Apply silicone sealant around the base between the flush surface and luminaire.

Accessories

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

Maintenance:

Clean regularly with solvent-free cleaner removing dirt and debris. Do not use high pressure cleaners.

Replacement Parts

See label inside of fixture for LED replacement part number.

Consult factory for all other replacement components.

Product Safety Warnings:

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR WET LOCATIONS. MIN 90°C SUPPLY CONDUCTORS.

CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONVIENT AUX EMPLACEMENTS MOUILLÉS.

LES FILS D'ALIMENTATION 90°C MIN.