


# BEGA

Photometric Filename: 24320.ies

TEST: BE\_24320  
 TEST LAB: BEGA  
 DATE: 6/12/2017  
 LUMINAIRE: 24 320  
 LAMP: 48W LED

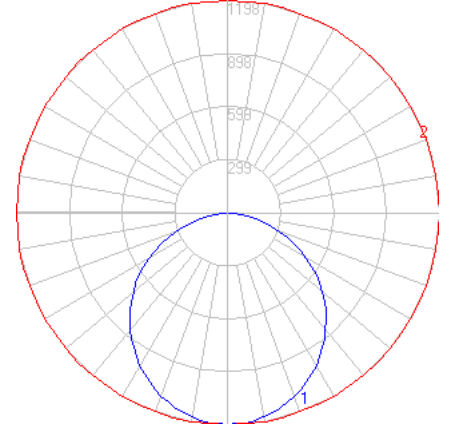


### Characteristics


|                                 |                 |
|---------------------------------|-----------------|
| Lumens Per Lamp                 | N.A. (absolute) |
| Total Lamp Lumens               | N.A. (absolute) |
| Luminaire Lumens                | 3361            |
| Total Luminaire Efficiency      | N.A.            |
| Luminaire Efficacy Rating (LER) | 61              |
| Total Luminaire Watts           | 55              |
| Ballast Factor                  | 1.00            |
| CIE Type                        | Direct          |
| Spacing Criterion (0-180)       | 1.24            |
| Spacing Criterion (90-270)      | 1.26            |
| Spacing Criterion (Diagonal)    | 1.38            |
| Basic Luminous Shape            | Rectangular     |
| Luminous Length (0-180)         | 0.13 ft         |
| Luminous Width (90-270)         | 4.86 ft         |
| Luminous Height                 | 0.00 ft         |

### Zonal Lumen Summary

| Zone    | Lumens |
|---------|--------|
| 0-10    | 113.21 |
| 10-20   | 323.28 |
| 20-30   | 488.11 |
| 30-40   | 586.90 |
| 40-50   | 608.48 |
| 50-60   | 549.62 |
| 60-70   | 416.11 |
| 70-80   | 227.40 |
| 80-90   | 47.86  |
| 90-100  | 0.00   |
| 100-110 | 0.00   |
| 110-120 | 0.00   |
| 120-130 | 0.00   |
| 130-140 | 0.00   |
| 140-150 | 0.00   |
| 150-160 | 0.00   |
| 160-170 | 0.00   |
| 170-180 | 0.00   |

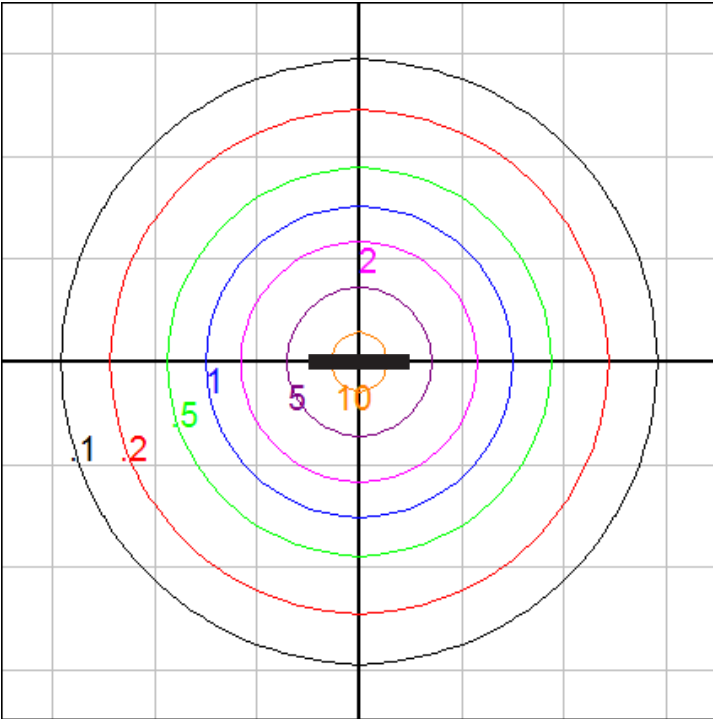

Ceiling Mount - Isofootcandle grid on floor  
 Mounting Height = 10 ft. Grid Spacing = 10 ft.

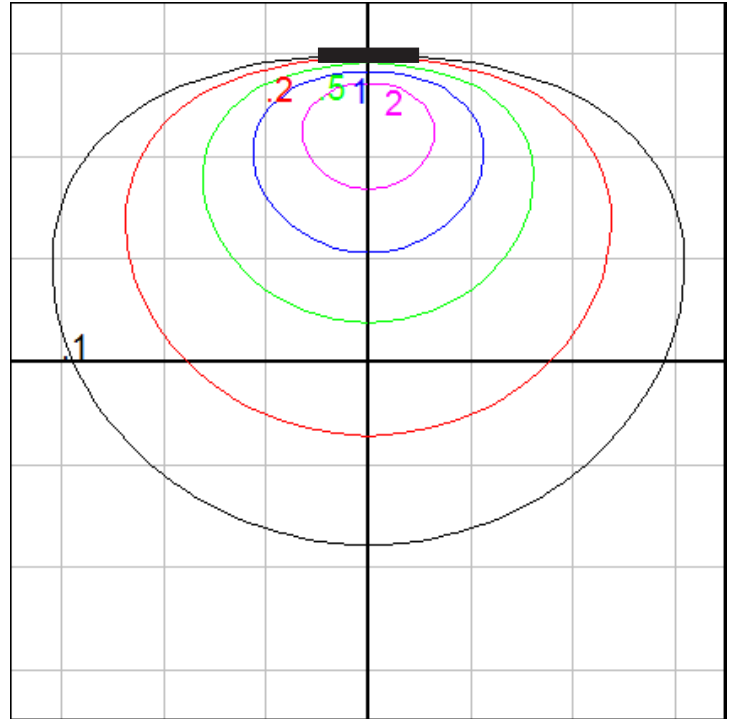

Wall Mount - Isofootcandle grid on floor  
 Mounting Height = 5 ft. Grid Spacing = 10 ft.

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.