
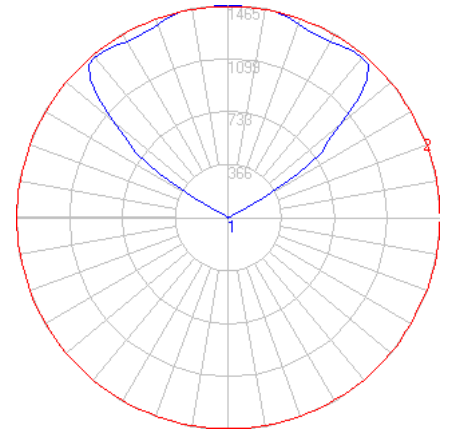


BEGA

Photometric Filename: 24361.IES

TEST: BE24361
 TEST LAB: BEGA
 DATE: 1/8/2016
 LUMINAIRE: 24 361
 LAMP: 33.6W LED

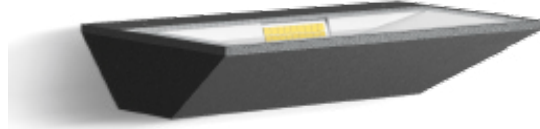


Characteristics


NEMA Type	7 H x 6 V
Maximum Candela	1464.4
Maximum Candela Angle	0 H -3 V
Horizontal Beam Angle (50%)	103.5
Vertical Beam Angle (50%)	111.4
Horizontal Field Angle (10%)	144.6
Vertical Field Angle (10%)	126.8
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Beam Lumens	3468
Beam Efficiency	N.A.
Field Lumens	3980
Field Efficiency	N.A.
Spill Lumens	35
Luminaire Lumens	4015
Total Efficiency	N.A.
Total Luminaire Watts	39

Zonal Lumen Summary

Zone	Lumens
0-10	0.00
10-20	0.00
20-30	0.00
30-40	0.00
40-50	0.00
50-60	0.00
60-70	0.00
70-80	0.00
80-90	0.06
90-100	4.75
100-110	60.24
110-120	296.75
120-130	722.46
130-140	905.00
140-150	819.08
150-160	634.21
160-170	405.31
170-180	138.59

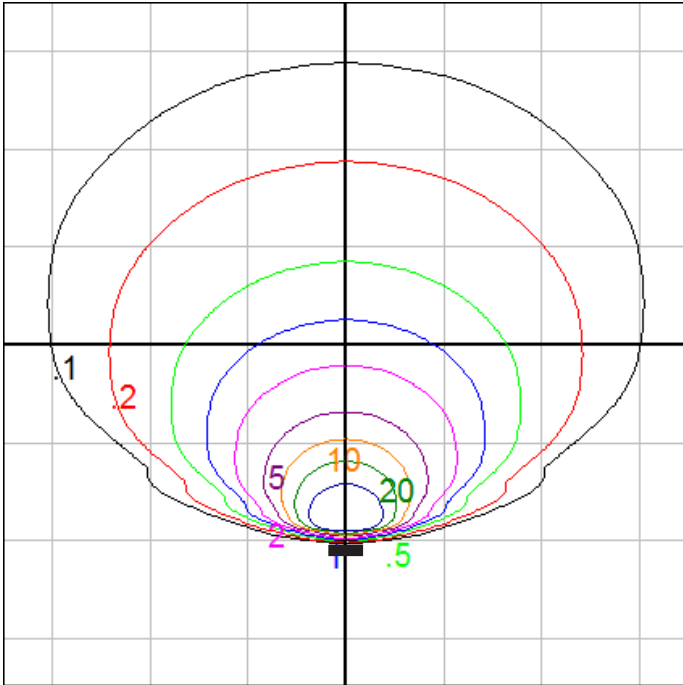

Wall Mounted Fixture - Iso-Grid on Wall
 Grid Spacing = 5 ft.

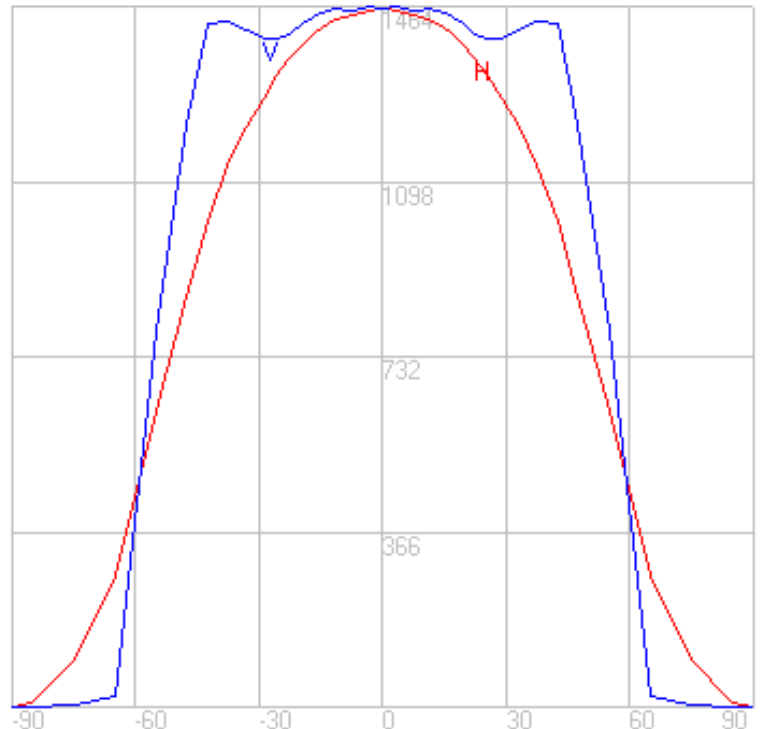

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.