


BEGA

Photometric Filename: 24591.ies

TEST: BE_24591
 TEST LAB: BEGA
 DATE: 2/6/2017
 LUMINAIRE: 24 591
 LAMP: 19.6W LED

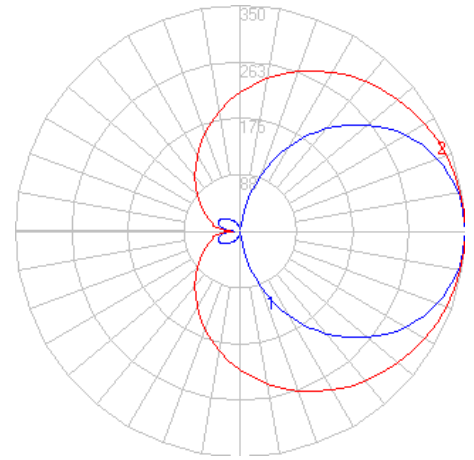


Characteristics

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	1946
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	81
Total Luminaire Watts	24
Ballast Factor	1.00
CIE Type	General Diffuse
Spacing Criterion (0-180)	N.A.
Spacing Criterion (90-270)	N.A.
Spacing Criterion (Diagonal)	N.A.
Basic Luminous Shape	Rectangular w/Sides
Luminous Length (0-180)	0.08 m
Luminous Width (90-270)	0.08 m
Luminous Height	0.54 m

Zonal Lumen Summary

Zone	Lumens
0-10	1.03
10-20	10.67
20-30	33.43
30-40	66.67
40-50	105.78
50-60	145.59
60-70	181.07
70-80	207.58
80-90	221.34
90-100	221.34
100-110	207.58
110-120	181.07
120-130	145.59
130-140	105.78
140-150	66.67
150-160	33.43
160-170	10.67
170-180	1.03

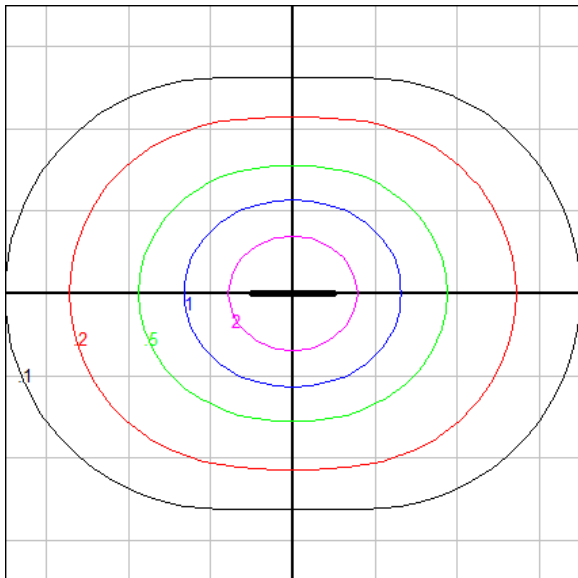

Ceiling Mount - Isofootcandle grid on floor
 Mounting Height = 10 ft. Grid Spacing = 8 ft.

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.