


BEGA

Photometric Filename: 33830.ies

TEST: BE_33830
 TEST LAB: BEGA
 DATE: 10/07/2015
 LUMINAIRE: 33 830
 LAMP: 0.3W LED 24V DC

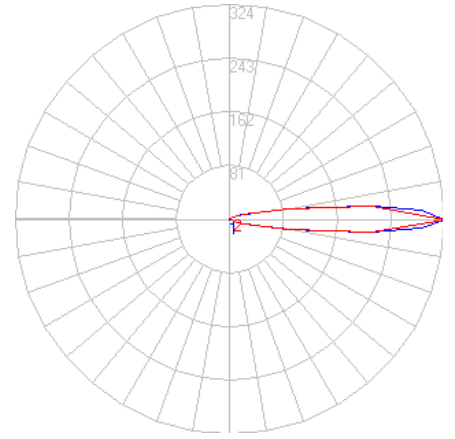


Characteristics


NEMA Type	3 H x 3 V
Maximum Candela	324
Maximum Candela Angle	0 H 0 V
Horizontal Beam Angle (50%)	14.3
Vertical Beam Angle (50%)	13.6
Horizontal Field Angle (10%)	32.7
Vertical Field Angle (10%)	32.3
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Beam Lumens	10
Beam Efficiency	N.A.
Field Lumens	24
Field Efficiency	N.A.
Spill Lumens	8
Luminaire Lumens	32
Total Efficiency	N.A.
Total Luminaire Watts	1

Zonal Lumen Summary

Zone	Lumens
0-10	0.00
10-20	0.00
20-30	0.02
30-40	0.04
40-50	0.07
50-60	0.14
60-70	0.62
70-80	3.38
80-90	11.69
90-100	11.69
100-110	3.38
110-120	0.62
120-130	0.14
130-140	0.07
140-150	0.04
150-160	0.02
160-170	0.00
170-180	0.00

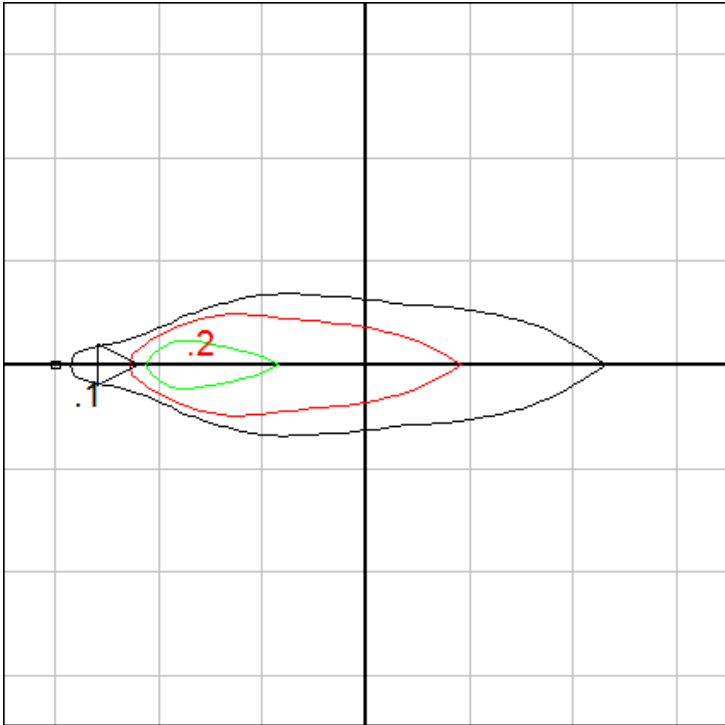

Mounting Height = 1 ft. Grid Spacing = 2.5 ft.

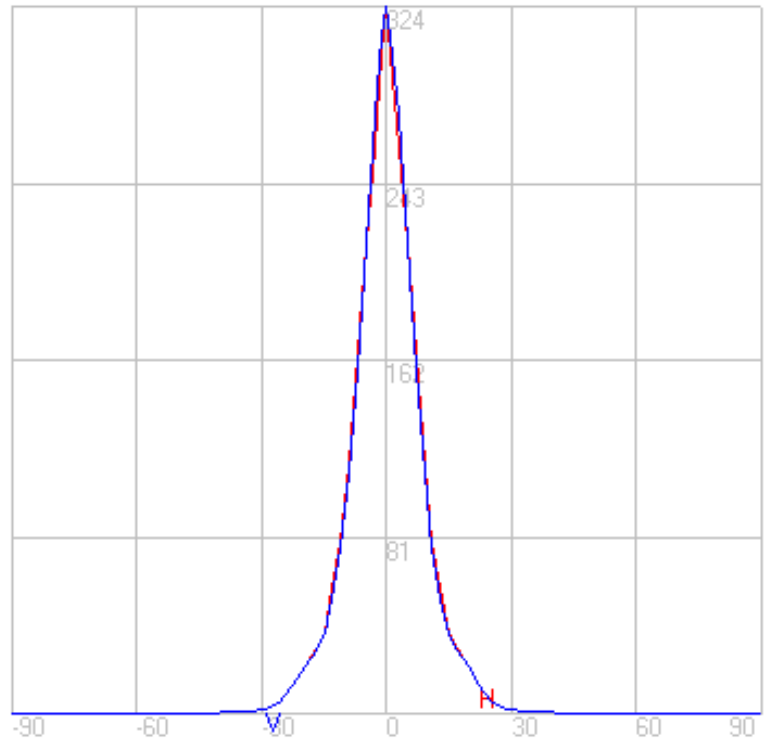

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.