


BEGA

Photometric Filename: 44438.IES

TEST: BE_44438
 TEST LAB: BEGA
 DATE: 2/13/2017
 LUMINAIRE: 44 438
 LAMP: 30.4W LED

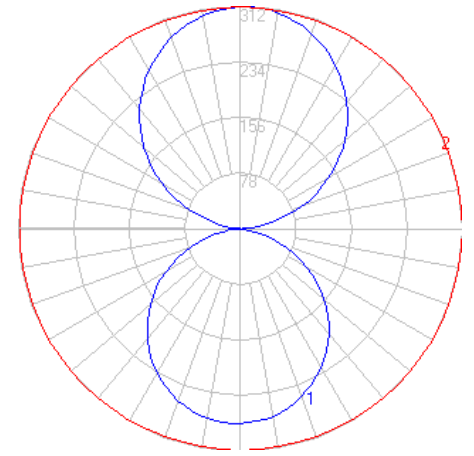


Characteristics


Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	1646
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	48
Total Luminaire Watts	34
Ballast Factor	1.00
CIE Type	General Diffuse
Spacing Criterion (0-180)	N.A.
Spacing Criterion (90-270)	N.A.
Spacing Criterion (Diagonal)	N.A.
Basic Luminous Shape	Rectangular
Luminous Length (0-180)	0.15 ft
Luminous Width (90-270)	4.80 ft
Luminous Height	0.00 ft

Zonal Lumen Summary

Zone	Lumens
0-10	25.92
10-20	74.24
20-30	112.65
30-40	135.85
40-50	140.69
50-60	126.15
60-70	93.62
70-80	48.38
80-90	8.61
90-100	13.25
100-110	59.87
110-120	109.11
120-130	144.02
130-140	159.25
140-150	153.32
150-160	127.22
160-170	84.11
170-180	29.42

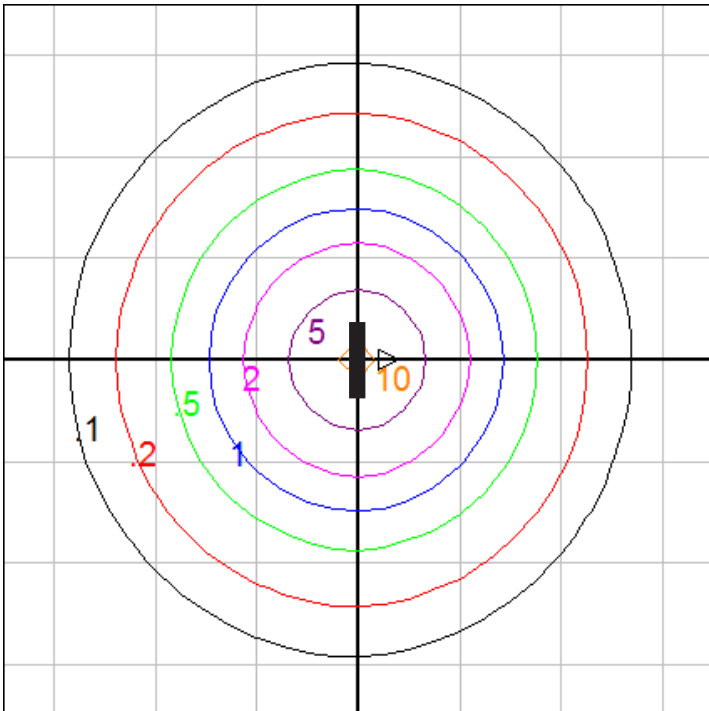

Wall mount - isofootcandle grid on floor
 Mounting Height = 5 ft. Grid Spacing = 5 ft.

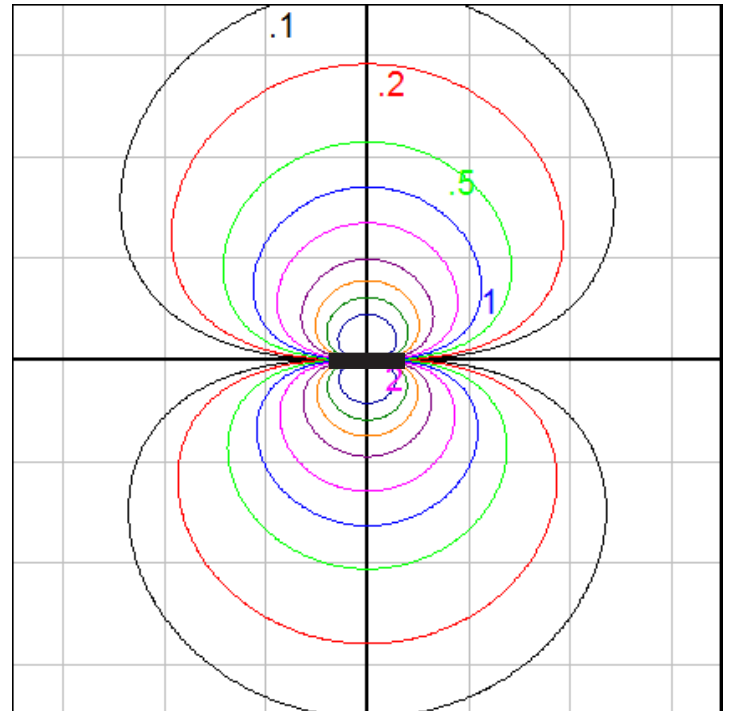

Wall mount - isofootcandle grid on wall
 Grid Spacing = 2.5 ft.

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.