


BEGA

Photometric Filename: 50069.IES

TEST: LI_50069
 TEST LAB: BEGA
 DATE: 5/24/2016
 LUMINAIRE: 50 069.X
 LAMP: 23.6W LED

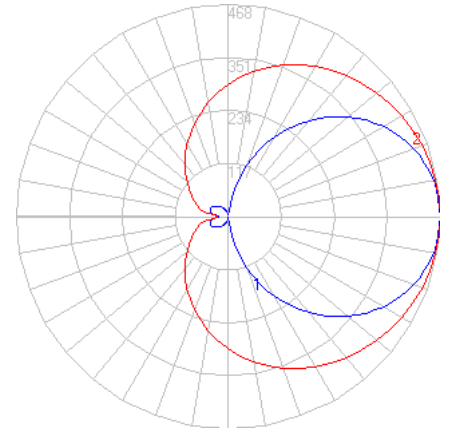


Characteristics


Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	2619
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	94
Total Luminaire Watts	28
Ballast Factor	1.00
CIE Type	General Diffuse
Spacing Criterion (0-180)	N.A.
Spacing Criterion (90-270)	N.A.
Spacing Criterion (Diagonal)	N.A.
Basic Luminous Shape	Circular w/ Sides
Luminous Length (0-180)	0.00 ft
Luminous Width (90-270)	0.25 ft (Diameter)
Luminous Height	3.00 ft

Zonal Lumen Summary

Zone	Lumens
0-10	1.40
10-20	14.38
20-30	45.00
30-40	89.72
40-50	142.31
50-60	195.89
60-70	243.60
70-80	279.26
80-90	297.99
90-100	297.99
100-110	279.26
110-120	243.60
120-130	195.89
130-140	142.31
140-150	89.72
150-160	45.00
160-170	14.38
170-180	1.40

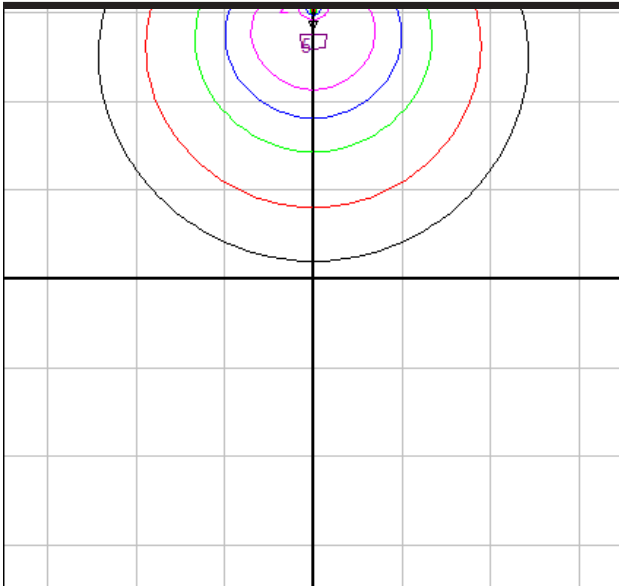

Mounting Height = 5 ft. Grid Spacing = 10 ft.
Isofootcandle grid on floor

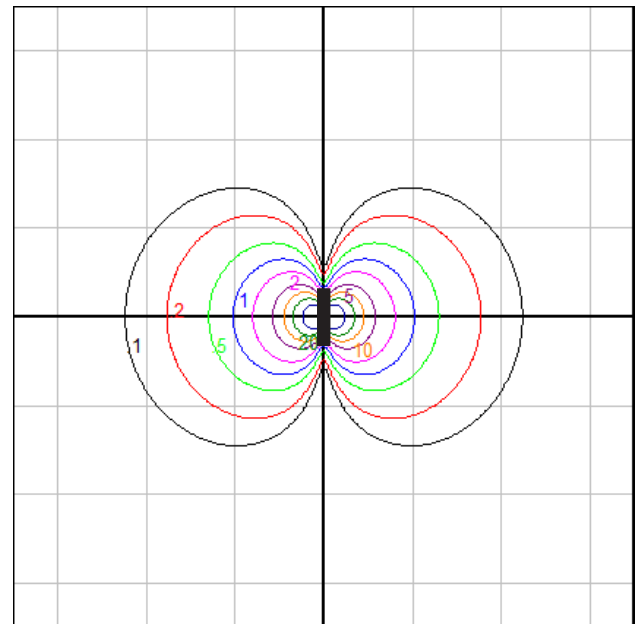

Grid Spacing = 5 ft.
Isofootcandle grid on wall

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.