


# BEGA

Photometric Filename: 50070.IES

TEST: LI\_50070  
 TEST LAB: BEGA  
 DATE: 5/30/2016  
 LUMINAIRE: 50 070.X  
 LAMP: 35.4W LED

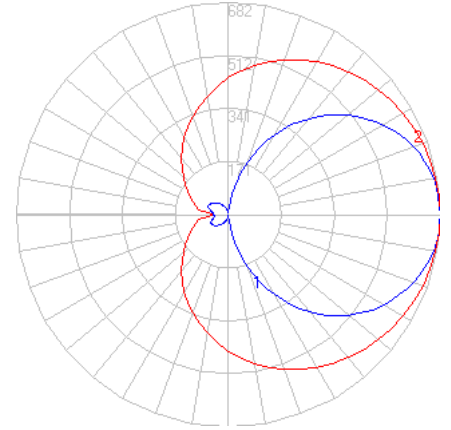


### Characteristics


Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	3930
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	96
Total Luminaire Watts	41
Ballast Factor	1.00
CIE Type	General Diffuse
Spacing Criterion (0-180)	N.A.
Spacing Criterion (90-270)	N.A.
Spacing Criterion (Diagonal)	N.A.
Basic Luminaire Shape	Circular w/ Sides
Luminous Length (0-180)	0.00 ft
Luminous Width (90-270)	0.26 ft (Diameter)
Luminous Height	3.00 ft

### Zonal Lumen Summary

Zone	Lumens
0-10	2.13
10-20	21.76
20-30	67.84
30-40	135.00
40-50	213.92
50-60	294.27
60-70	365.67
70-80	418.72
80-90	447.00
90-100	446.81
100-110	418.38
110-120	365.33
120-130	293.84
130-140	213.61
140-150	134.74
150-160	67.64
160-170	21.63
170-180	2.10

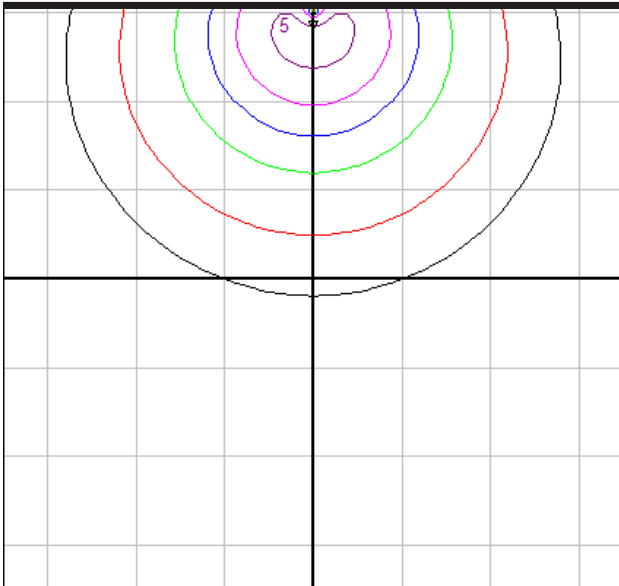

Mounting Height = 5 ft. Grid Spacing = 10 ft.  
**Isofootcandle grid on floor**

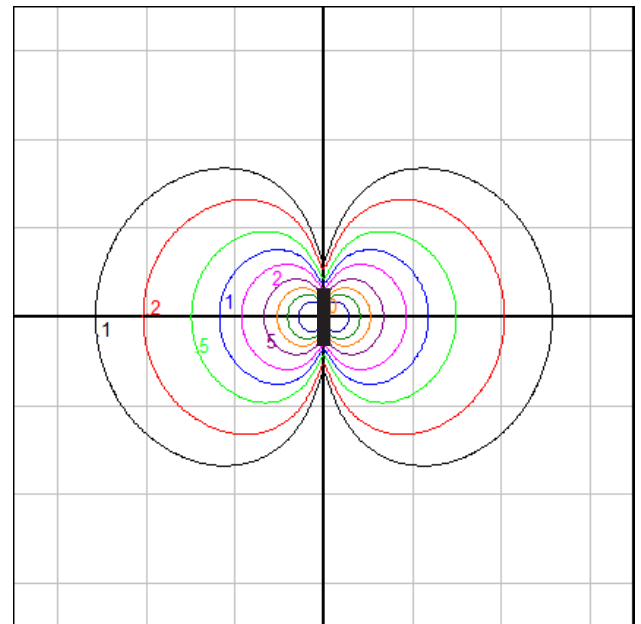

Grid Spacing = 5 ft.  
**Isofootcandle grid on wall**

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.