


BEGA

Photometric Filename: 50142.IES

TEST: LI_50142
 TEST LAB: BEGA
 DATE: 10/27/2016
 LUMINAIRE: 50 142
 LAMP: 35.2W LED

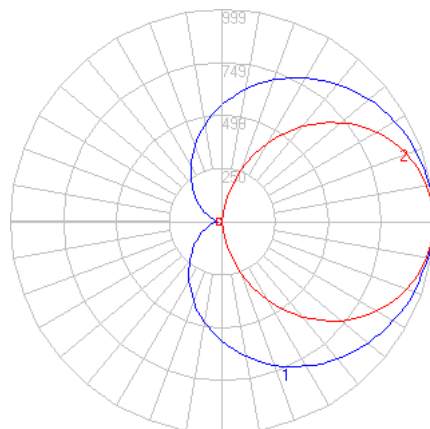


Characteristics


Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	4692
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	117
Total Luminaire Watts	40
Ballast Factor	1.00
CIE Type	General Diffuse
Spacing Criterion (0-180)	N.A.
Spacing Criterion (90-270)	N.A.
Spacing Criterion (Diagonal)	N.A.
Basic Luminous Shape	Hor. Cylinder
Luminous Length (0-180)	0.00 ft
Luminous Width (90-270)	3.42 ft
Luminous Height	0.17 ft (Diameter)

Zonal Lumen Summary

Zone	Lumens
0-10	53.31
10-20	154.64
20-30	240.83
30-40	304.26
40-50	340.47
50-60	348.51
60-70	332.17
70-80	300.96
80-90	270.66
90-100	270.66
100-110	300.96
110-120	332.17
120-130	348.51
130-140	340.47
140-150	304.26
150-160	240.83
160-170	154.64
170-180	53.31

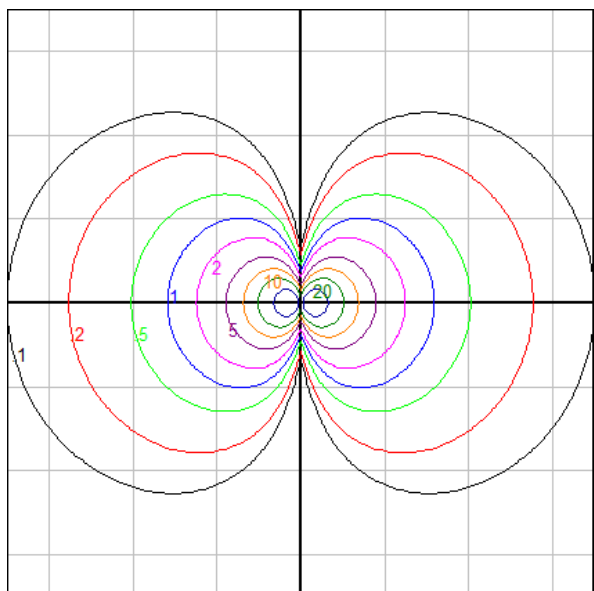

Wall Mount (Vertical) *Isofootcandle grid on wall
 Grid Spacing = 5 ft.

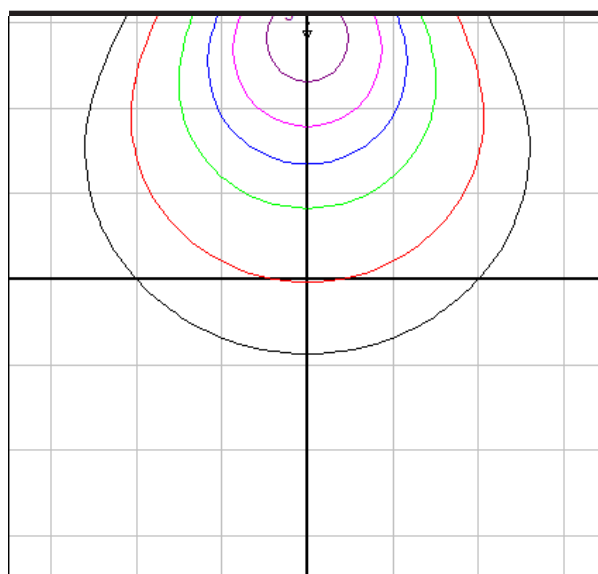

Wall Mount (Vertical) *Isofootcandle grid on floor
 Mounting Height = 8 ft. Grid Spacing = 10 ft.

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.