


Tools Required:

- Medium flathead screwdriver
- Medium Phillips-head screwdriver
- 3mm hex head screw driver

Overview:

LED Watts: 33.6W
 System Watts: 41.0W
 Controllability: Triac, ELV, 0-10V dimmable
 Weight: 6.4 lbs.




Dimensions

A: 12-5/8"

B: 4-1/8"

C: 7-3/8"

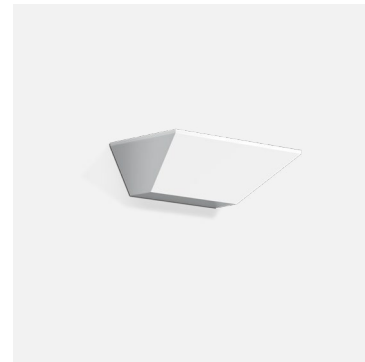


Notice to Installer:

1. See page 2 for specific product safety warnings.
2. Select the desired housing material finish by using appropriate code number as suffix.
 Code number .1 - White
 Code number .4 - Palladium
 Code number .5 - Velvet black
3. Mounts directly to ceiling or wall over recessed standard 4" octagonal junction box (by others).
4. LEDs are high-quality electronic components! Please avoid touching LED directly during installation.

Installation:

1. Loosen (2) 3mm hex head set screws on top of luminaire and detach mounting plate from the outer housing.
2. Make supply wiring and luminaire wiring connections inside the recessed junction box:
 MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE
 NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE
 GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE
 Dimming (if applicable):
 DIMMING CONTROL WIRE (+) TO POSITIVE PURPLE DRIVER DIM CONTROL WIRE
 DIMMING CONTROL WIRE (-) TO NEGATIVE GREY DRIVER DIM CONTROL WIRE
3. Mount the mounting plate housing directly to wall over recessed junction box using mounting holes (Figure 1).
4. Replace the luminaire outer housing and secure by tightening (2) 3mm hex head set screws.

Figure 1:

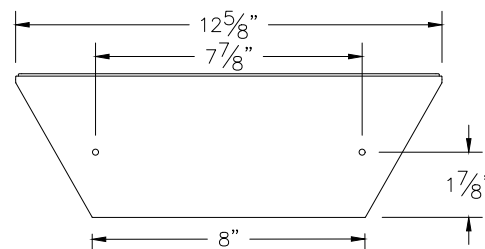

Accessories

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

Maintenance:

Clean regularly with solvent-free cleaner removing dirt and debris. Do not use high pressure cleaners.

Replacement Parts

See label inside of fixture for LED replacement part number.

Consult factory for all other replacement components.

Product Safety Warnings:

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR DAMP LOCATIONS. MIN 90°C SUPPLY CONDUCTORS.

CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONVIENT AUX EMPLACEMENTS HUMIDE.

LES FILS D'ALIMENTATION 90°C MIN.