


Tools Required:

- Phillips medium screwdriver
Standard medium screwdriver



Dimensions
A: 16-7/8 "
B: 5-5/8 "






Weight: 11.7 lbs.

Notice to Installer for 50 365:

- 1. Rated for damp locations - for interior applications only.
- 2. Luminaire mounting canopy mounts directly to finished ceiling surface over 4" standard octagonal wiring box.
- 3. For ceiling applications only.
- 4. Select the desired housing material finish by using appropriate code number as suffix:
 - 50 365.2 - Velvet white + aluminum
 - 50 365.4 - Velvet white + brass
 - 50 365.6 - Velvet white + copper

50 365 installation:

- 1. Before installing onto the ceiling, luminaire mounting plate must be inserted into the luminaire housing.
- 2. Route wires through luminaire base.
- 3. Make supply wiring and luminaire wiring connections inside wiring box:
 - MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE
 - NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE
 - GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE
- Dimming (if applicable):
 - DIMMING CONTROL WIRE (+) TO POSITIVE DRIVER DIM CONTROL WIRE
 - DIMMING CONTROL WIRE (-) TO NEGATIVE DRIVER DIM CONTROL WIRE
- 4. Fix mounting plate inside the luminaire housing, and attach to finished ceiling surface using appropriate hardware (by others).
- 5. Insert opal glass by screwing in clockwise.

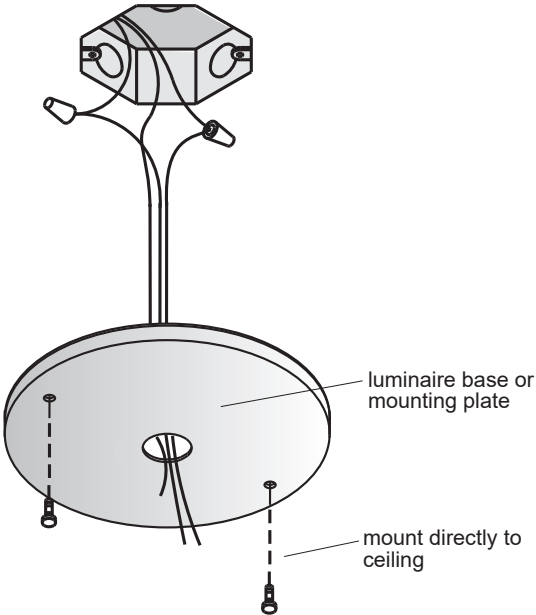

Relamping/Maintenance	Accessories	Replacement Parts	
Clean dirt and deposits from the luminaire and glass using only solvent-free cleaners. Relamp.	Please refer to the appropriate accessory installation sheet for further instruction when applicable.	Description	Part No
		LED Module (3000K) Driver (120V-277V)	LED-0630/830 75989-02
		Diffuser	113185.0

Lamp: 43.5W LED

Product Safety Warnings:

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR DAMP LOCATIONS.

MIN 90°C SUPPLY CONDUCTORS.

CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONVIENT AUX EMPLACEMENTS HUMIDES.

LES FILS D'ALIMENTATION 90°C MIN.
