


Tools Required:

- Medium flathead screwdriver
- Medium Phillips-head screwdriver


Overview:

LED Watts: 15.2W
 System Watts: 19.0W
 Controllability: Triac, ELV, 0-10V dimmable
 Weight: 4 lbs.



Dimensions

- A:** 9-7/8"
- B:** 10"
- C:** 5-3/8"

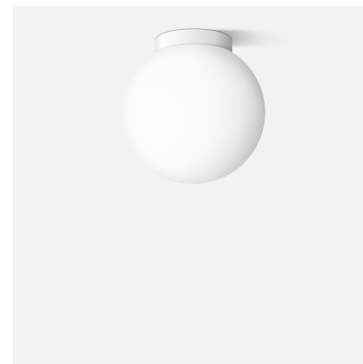


Notice to Installer:

1. See page 2 for specific product safety warnings.
2. Mounts directly to ceiling or wall recessed standard 4" octagonal junction box (using included junction box)
3. LEDs are high-quality electronic components! Please avoid touching LED directly during installation.

Installation:

1. Remove trim ring if applicable. Remove opal glass from luminaire housing by twisting glass counter-clockwise and set aside.
2. Feed luminaire wires through housing wireway.
3. Make supply wiring and luminaire wiring connections inside the recessed junction box:
 MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE
 NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE
 GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE
 Dimming (if applicable):
 DIMMING CONTROL WIRE (+) TO POSITIVE PURPLE DRIVER DIM CONTROL WIRE
 DIMMING CONTROL WIRE (-) TO NEGATIVE GREY DRIVER DIM CONTROL WIRE
4. Attach mounting kit bracket to recessed 4" octagonal junction box (Figure 1).
5. Attach luminaire housing to mounting kit bracket using the threaded studs and nuts provided.
6. Replace luminaire opal glass by twisting back on to luminaire housing in clockwise rotation making sure the gasket is seated properly. Assure snug fit against housing and replace trim ring if applicable

Figure 1:

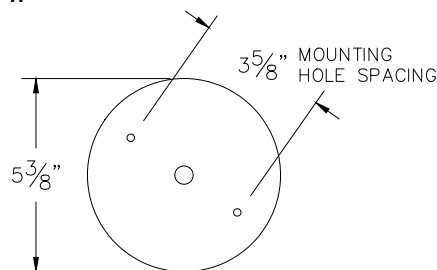

Accessories

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

Stainless steel trim ring	13 183
Polished aluminum trim ring	13 184
Brass trim ring	13 185

Maintenance:

Clean regularly with solvent-free cleaner removing dirt and debris. Do not use high pressure cleaners.

Replacement Parts

See label inside of fixture for LED replacement part number.

Consult factory for all other replacement components.

Product Safety Warnings:

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR DAMP LOCATIONS. MIN 90°C SUPPLY CONDUCTORS.

CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONVIENT AUX EMPLACEMENTS HUMIDE.

LES FILS D'ALIMENTATION 90°C MIN.