


BEGA

File: 50676.2K4_BEGA_IES.ies

TEST: BE_50676.2K3
 TEST LAB: BEGA
 DATE: 11/29/2018
 LUMINAIRE: 50 676.2K4
 LAMP: 17.0W LED


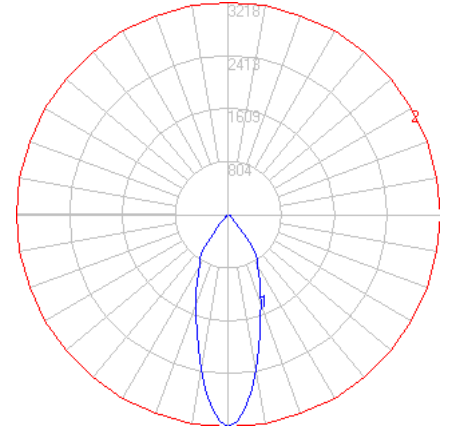


Characteristics

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	1903
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	95
Total Luminaire Watts	20
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	0.56
Spacing Criterion (90-270)	0.56
Spacing Criterion (Diagonal)	0.68
Basic Luminous Shape	Circular
Luminous Length (0-180)	0.00 ft
Luminous Width (90-270)	0.52 ft (Diameter)
Luminous Height	0.00 ft

Zonal Lumen Summary

Zone	Lumens
0-10	262.92
10-20	515.21
20-30	520.05
30-40	427.11
40-50	96.37
50-60	35.80
60-70	28.52
70-80	14.09
80-90	2.48
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00

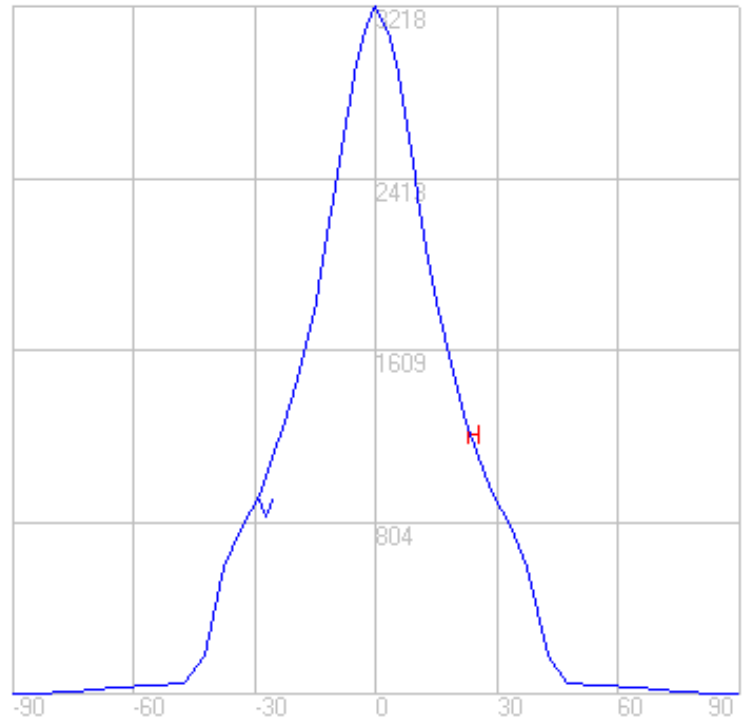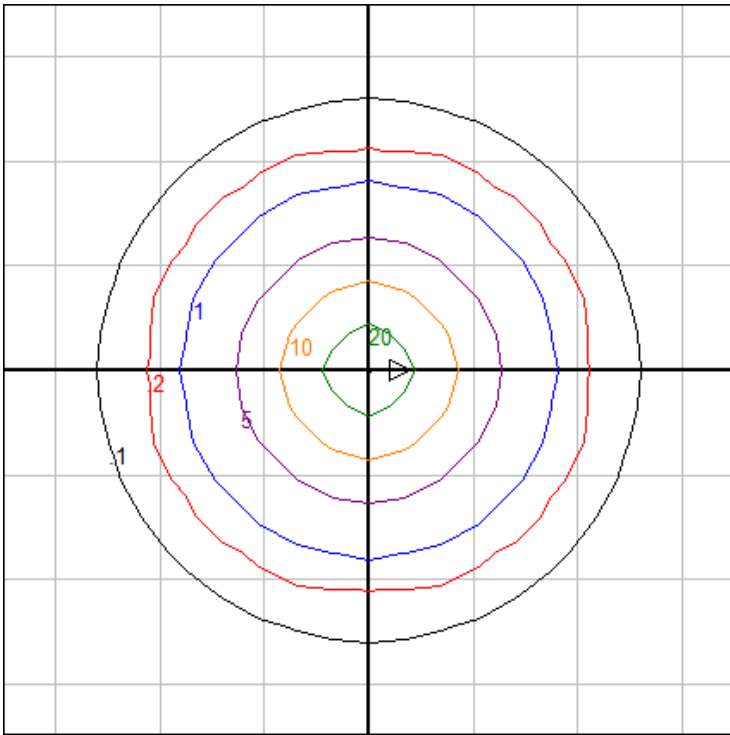



Ceiling Mounting Height: 10 ft. Grid Spacing: 5 ft.

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

BEGA

File: 50676.4K4_BEGA_IES.ies

TEST: BE_50676.4K3
 TEST LAB: BEGA
 DATE: 11/29/2018
 LUMINAIRE: 50 676.4K4
 LAMP: 17.0W LED

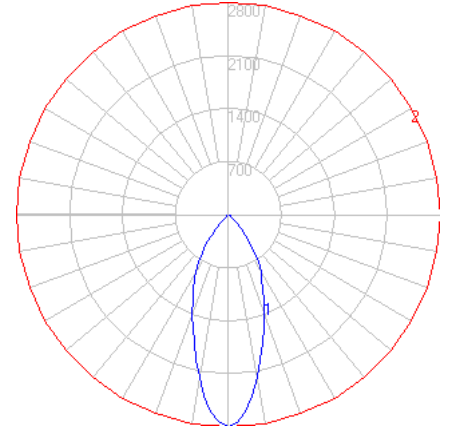
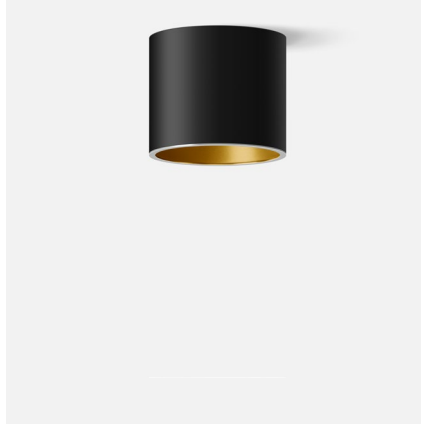


Characteristics

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	1769
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	88
Total Luminaire Watts	20
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	0.62
Spacing Criterion (90-270)	0.62
Spacing Criterion (Diagonal)	0.72
Basic Luminous Shape	Circular
Luminous Length (0-180)	0.00 ft
Luminous Width (90-270)	0.52 ft (Diameter)
Luminous Height	0.00 ft

Zonal Lumen Summary

Zone	Lumens
0-10	235.91
10-20	489.40
20-30	502.54
30-40	375.13
40-50	119.46
50-60	24.24
60-70	15.29
70-80	6.11
80-90	1.07
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00

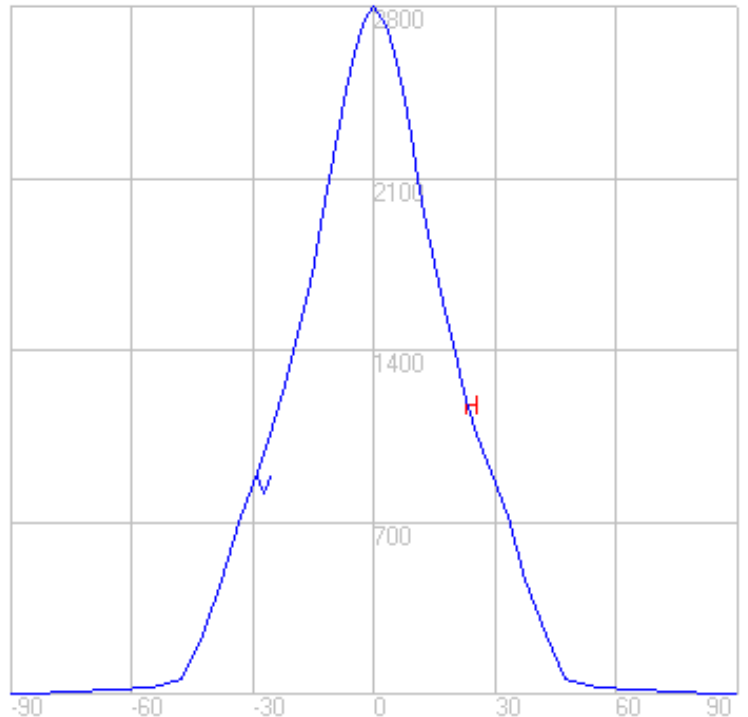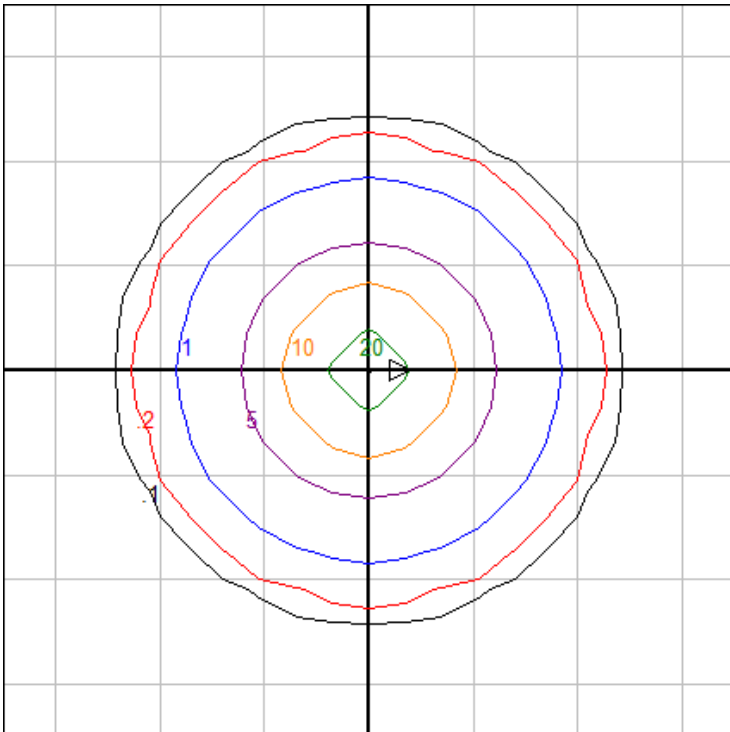

Ceiling Mounting Height: 10 ft. Grid Spacing: 5 ft.

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.



BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2020

06/25/2020

BEGA

File: 50676.6K4_BEGA_IES.ies

TEST: BE_50676.6K3
 TEST LAB: BEGA
 DATE: 11/29/2018
 LUMINAIRE: 50 676.6K4
 LAMP: 17.0W LED

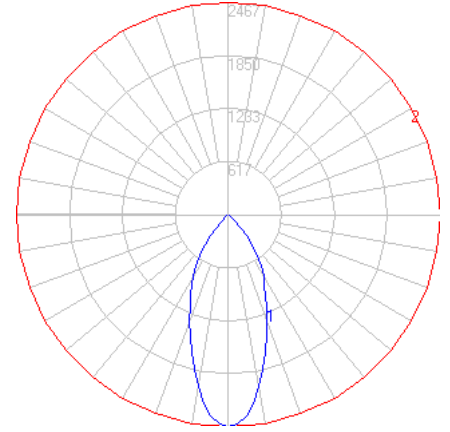
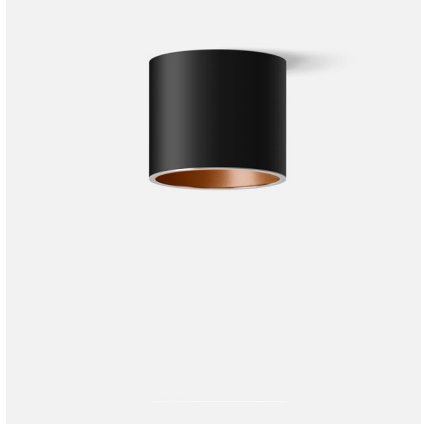


Characteristics

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	1631
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	82
Total Luminaire Watts	20
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	0.66
Spacing Criterion (90-270)	0.66
Spacing Criterion (Diagonal)	0.76
Basic Luminous Shape	Circular
Luminous Length (0-180)	0.00 ft
Luminous Width (90-270)	0.52 ft (Diameter)
Luminous Height	0.00 ft

Zonal Lumen Summary

Zone	Lumens
0-10	214.36
10-20	461.91
20-30	476.91
30-40	354.95
40-50	98.90
50-60	12.36
60-70	8.15
70-80	3.05
80-90	0.35
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00

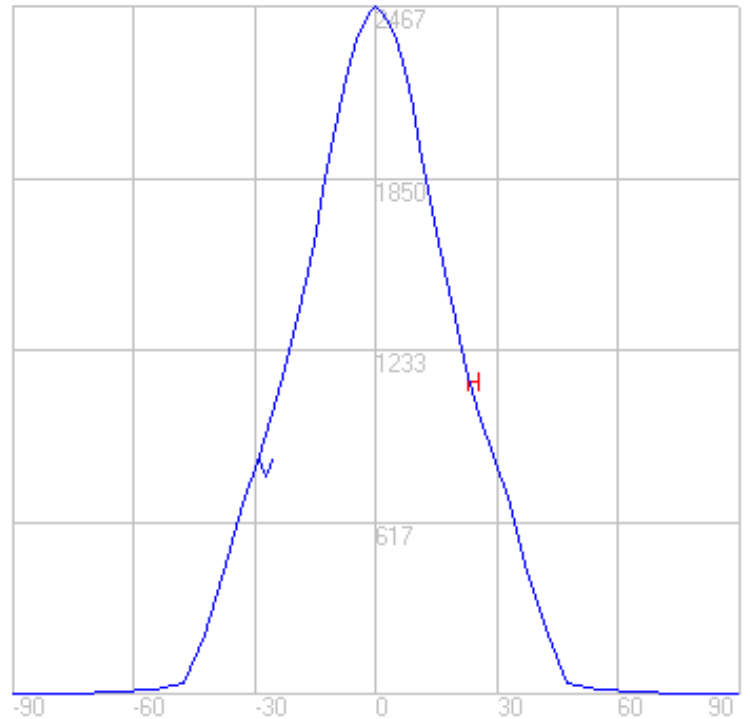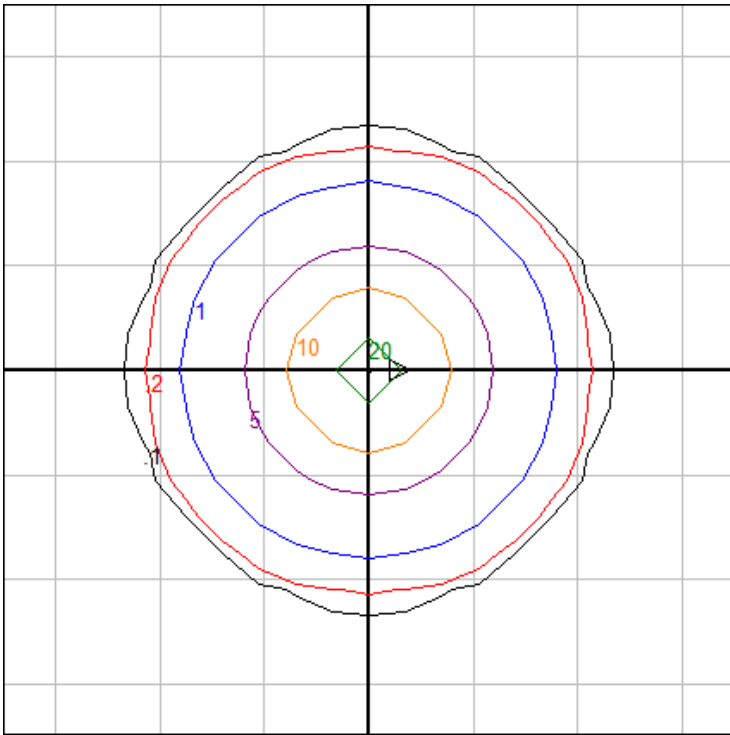

Ceiling Mounting Height: 10 ft. Grid Spacing: 5 ft.

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.



BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2020

06/25/2020

BEGA

File: 50676.2K35_BEGA_IES.ies

TEST: BE_50676.2K3
 TEST LAB: BEGA
 DATE: 11/29/2018
 LUMINAIRE: 50 676.2K35
 LAMP: 17.0W LED

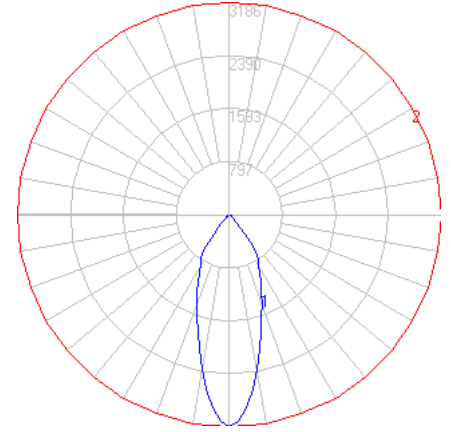
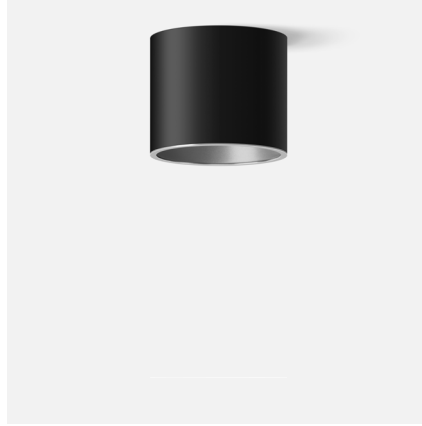


Characteristics

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	1884
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	94
Total Luminaire Watts	20
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	0.56
Spacing Criterion (90-270)	0.56
Spacing Criterion (Diagonal)	0.68
Basic Luminous Shape	Circular
Luminous Length (0-180)	0.00 ft
Luminous Width (90-270)	0.52 ft (Diameter)
Luminous Height	0.00 ft

Zonal Lumen Summary

Zone	Lumens
0-10	260.34
10-20	510.16
20-30	514.96
30-40	422.93
40-50	95.42
50-60	35.45
60-70	28.24
70-80	13.95
80-90	2.46
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00

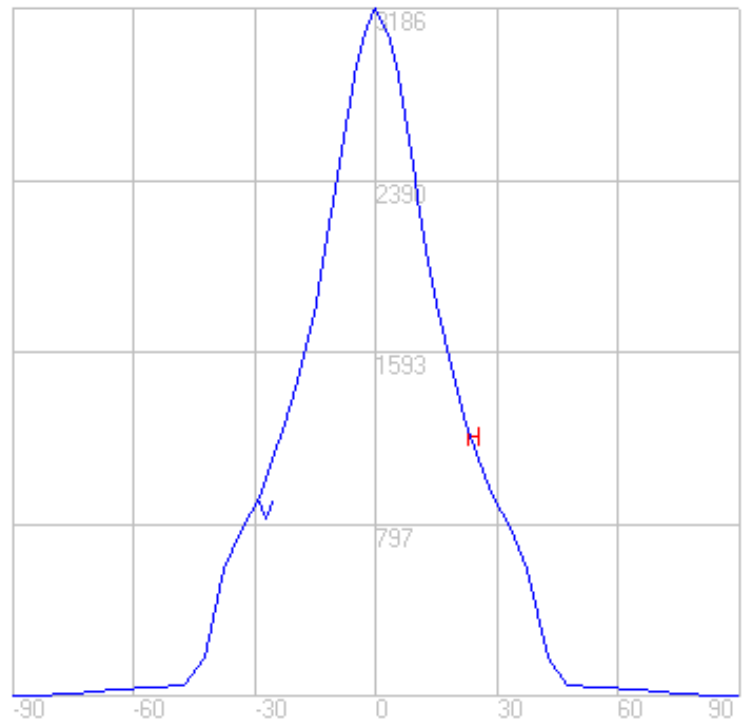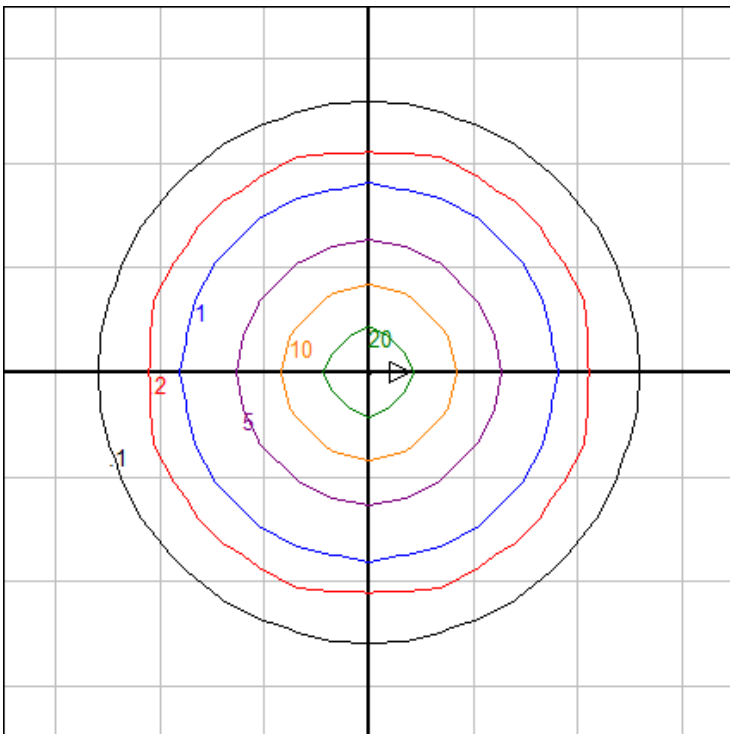

Ceiling Mounting Height: 10 ft. Grid Spacing: 5 ft.

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.



BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2020

06/25/2020

BEGA

File: 50676.4K35_BEGA_IES.ies

TEST: BE_50676.4K3
 TEST LAB: BEGA
 DATE: 11/29/2018
 LUMINAIRE: 50 676.4K35
 LAMP: 17.0W LED

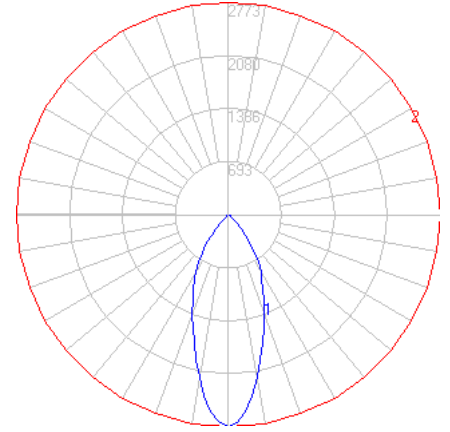
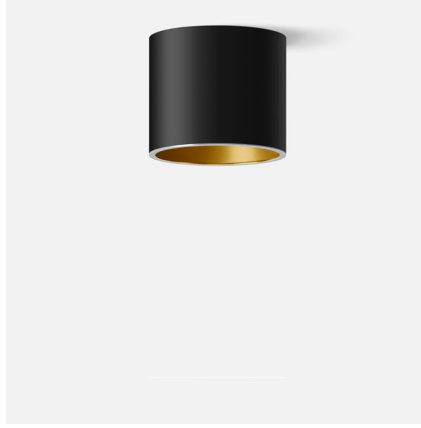


Characteristics

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	1752
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	88
Total Luminaire Watts	20
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	0.62
Spacing Criterion (90-270)	0.62
Spacing Criterion (Diagonal)	0.72
Basic Luminous Shape	Circular
Luminous Length (0-180)	0.00 ft
Luminous Width (90-270)	0.52 ft (Diameter)
Luminous Height	0.00 ft

Zonal Lumen Summary

Zone	Lumens
0-10	235.91
10-20	489.40
20-30	502.54
30-40	375.13
40-50	119.46
50-60	24.24
60-70	15.29
70-80	6.11
80-90	1.07
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00

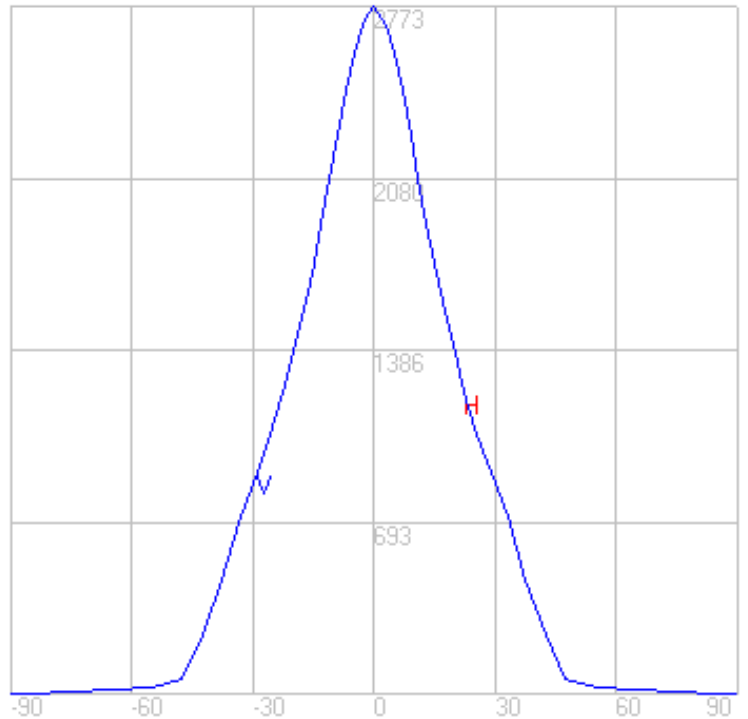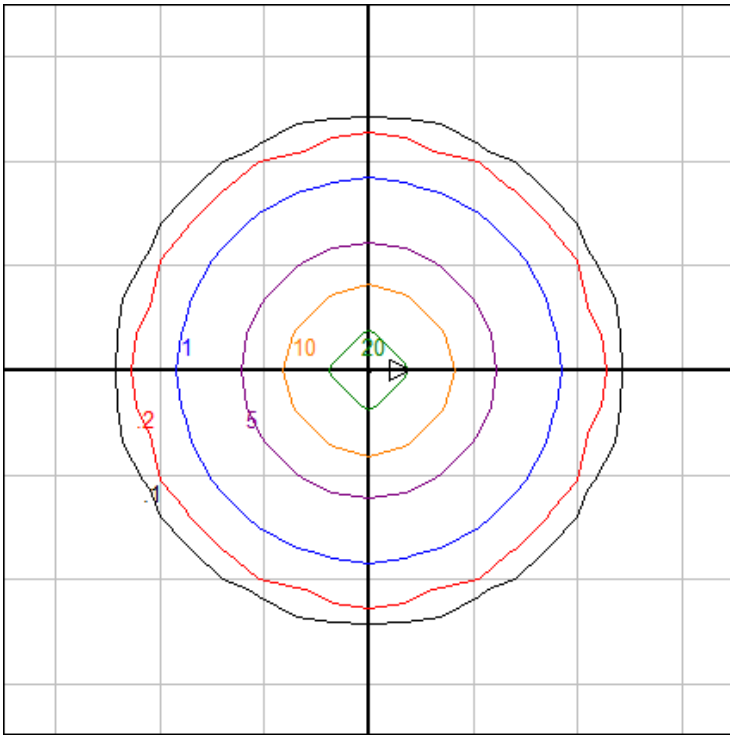


Ceiling Mounting Height: 10 ft. Grid Spacing: 5 ft.

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

BEGA

File: 50676.6K35_BEGA_IES.ies

TEST: BE_50676.6K3
 TEST LAB: BEGA
 DATE: 11/29/2018
 LUMINAIRE: 50 676.6K35
 LAMP: 17.0W LED


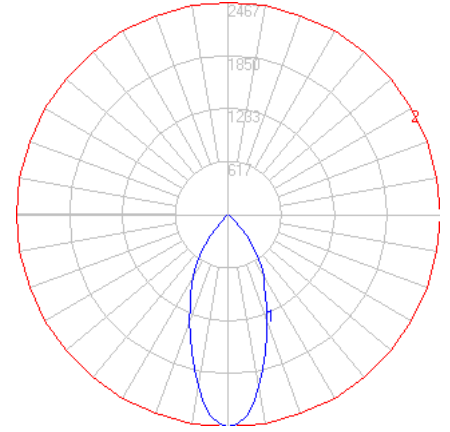


Characteristics

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	1631
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	82
Total Luminaire Watts	20
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	0.66
Spacing Criterion (90-270)	0.66
Spacing Criterion (Diagonal)	0.76
Basic Luminous Shape	Circular
Luminous Length (0-180)	0.00 ft
Luminous Width (90-270)	0.52 ft (Diameter)
Luminous Height	0.00 ft

Zonal Lumen Summary

Zone	Lumens
0-10	214.36
10-20	461.91
20-30	476.91
30-40	354.95
40-50	98.90
50-60	12.36
60-70	8.15
70-80	3.05
80-90	0.35
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00

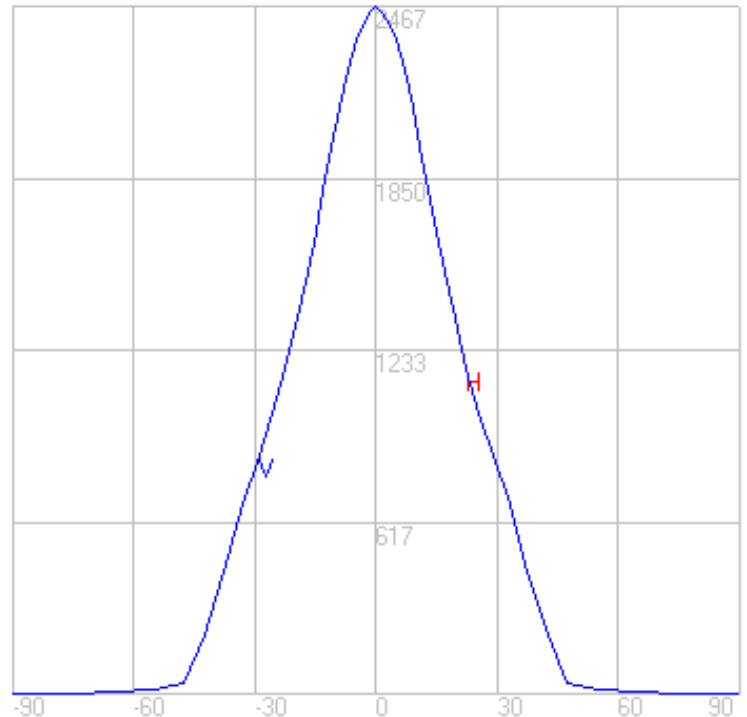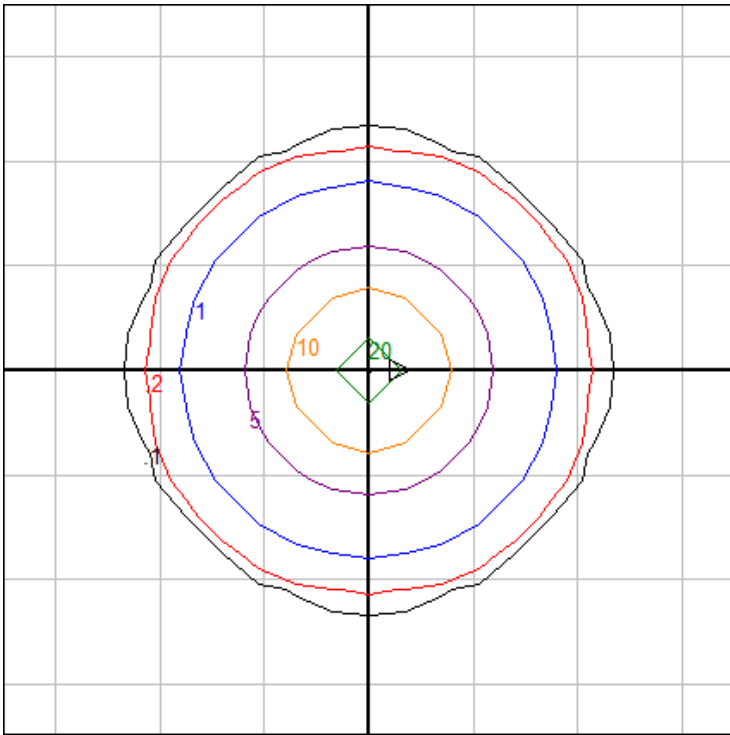

Ceiling Mounting Height: 10 ft. Grid Spacing: 5 ft.

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.


BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2020

06/25/2020

BEGA

File: 50676.2K3_BEGA_IES.ies

TEST: BE_50676.2K3
 TEST LAB: BEGA
 DATE: 11/29/2018
 LUMINAIRE: 50 676.2K3
 LAMP: 17.0W LED


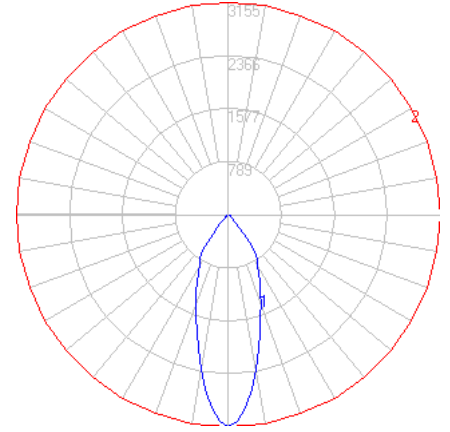


Characteristics

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	1865
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	93
Total Luminaire Watts	20
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	0.56
Spacing Criterion (90-270)	0.56
Spacing Criterion (Diagonal)	0.68
Basic Luminous Shape	Circular
Luminous Length (0-180)	0.00 ft
Luminous Width (90-270)	0.52 ft (Diameter)
Luminous Height	0.00 ft

Zonal Lumen Summary

Zone	Lumens
0-10	257.76
10-20	505.10
20-30	509.86
30-40	418.74
40-50	94.48
50-60	35.10
60-70	27.96
70-80	13.81
80-90	2.43
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00

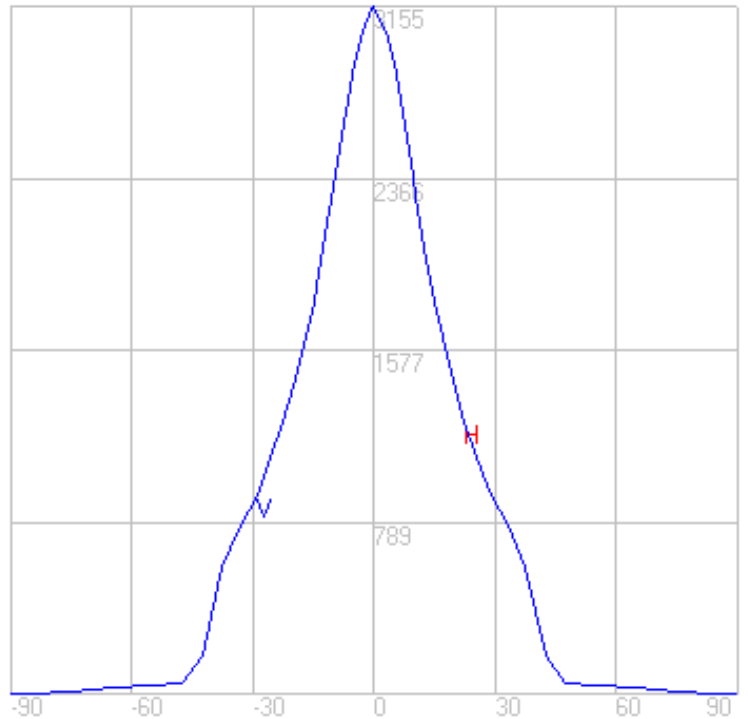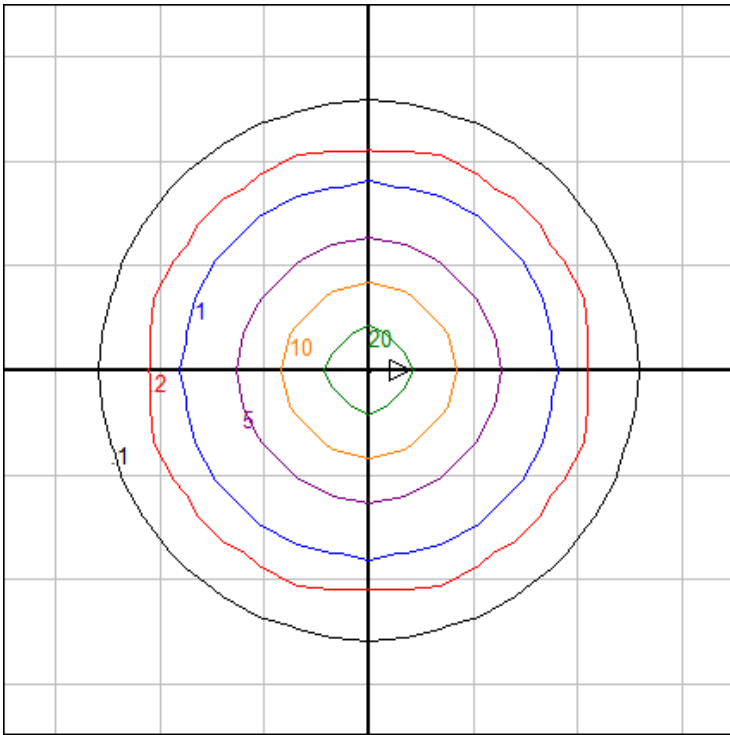

Ceiling Mounting Height: 10 ft. Grid Spacing: 5 ft.

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.



BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2020

06/25/2020

BEGA

File: 50676.4K3_BEGA_IES.ies

TEST: BE_50676.4K3
 TEST LAB: BEGA
 DATE: 11/29/2018
 LUMINAIRE: 50 676.4K3
 LAMP: 17.0W LED

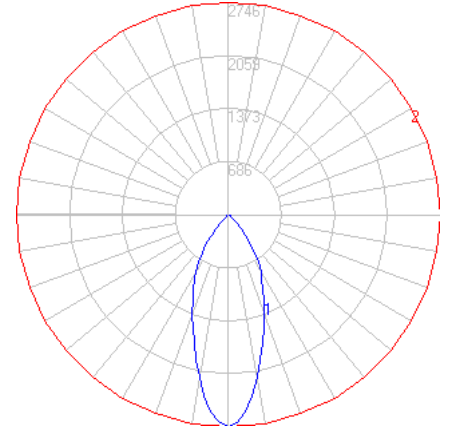
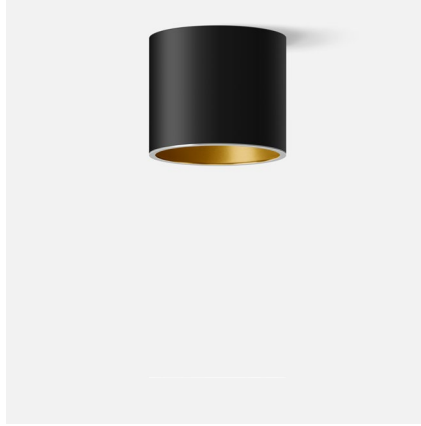


Characteristics

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	1734
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	87
Total Luminaire Watts	20
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	0.62
Spacing Criterion (90-270)	0.62
Spacing Criterion (Diagonal)	0.72
Basic Luminous Shape	Circular
Luminous Length (0-180)	0.00 ft
Luminous Width (90-270)	0.52 ft (Diameter)
Luminous Height	0.00 ft

Zonal Lumen Summary

Zone	Lumens
0-10	231.29
10-20	479.81
20-30	492.68
30-40	367.78
40-50	117.11
50-60	23.76
60-70	14.99
70-80	5.99
80-90	1.05
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00

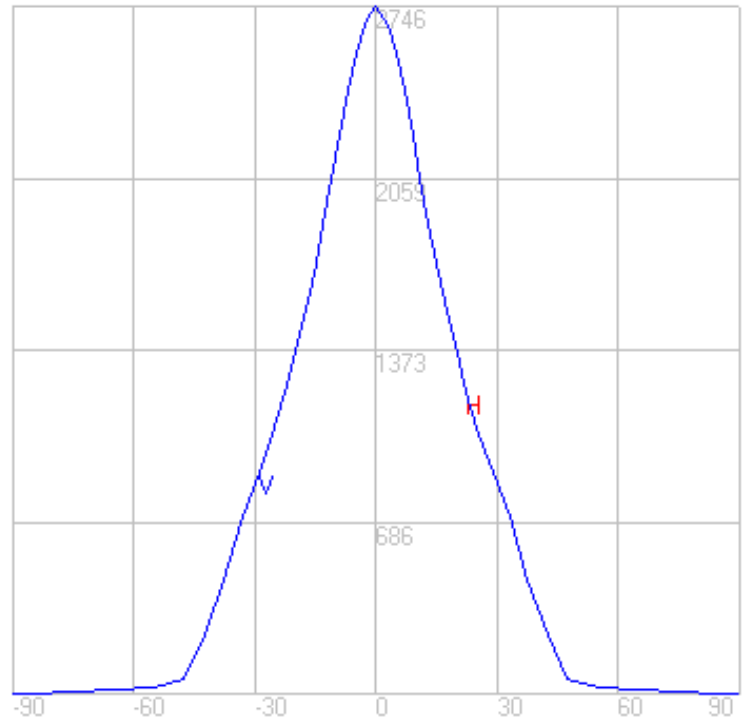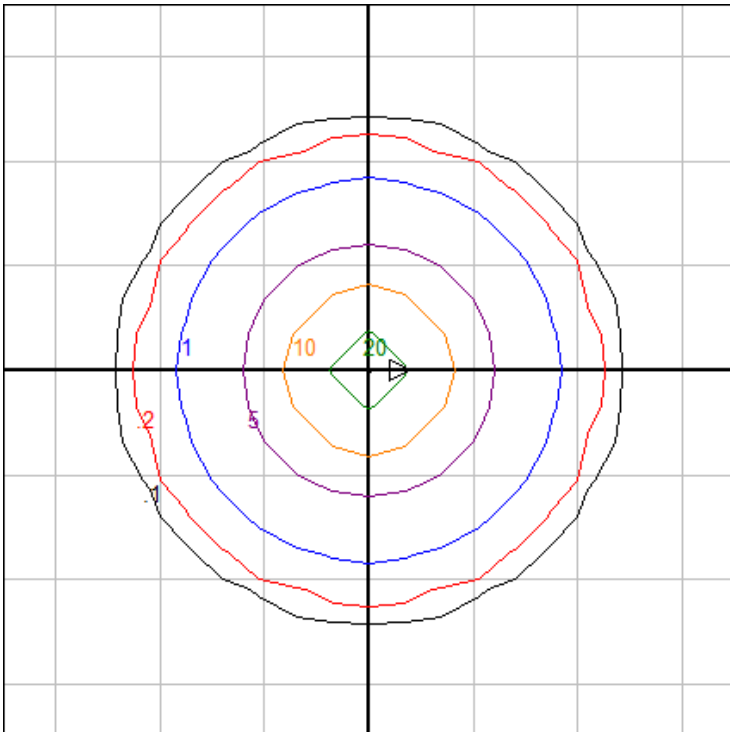

Ceiling Mounting Height: 10 ft. Grid Spacing: 5 ft.

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.


BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2020

06/25/2020

BEGA

File: 50676.6K3_BEGA_IES.ies

TEST: BE_50676.6K3
 TEST LAB: BEGA
 DATE: 11/29/2018
 LUMINAIRE: 50 676.26K3
 LAMP: 17.0W LED


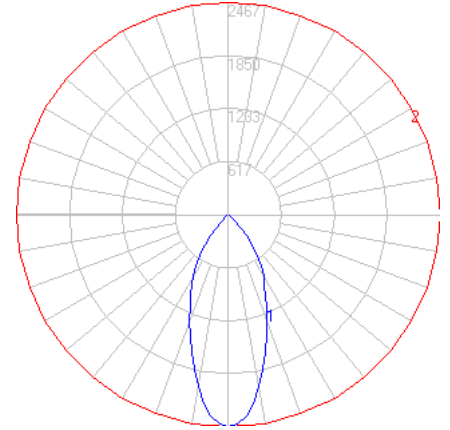


Characteristics

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	1631
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	82
Total Luminaire Watts	20
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	0.66
Spacing Criterion (90-270)	0.66
Spacing Criterion (Diagonal)	0.76
Basic Luminous Shape	Circular
Luminous Length (0-180)	0.00 ft
Luminous Width (90-270)	0.52 ft (Diameter)
Luminous Height	0.00 ft

Zonal Lumen Summary

Zone	Lumens
0-10	214.36
10-20	461.91
20-30	476.91
30-40	354.95
40-50	98.90
50-60	12.36
60-70	8.15
70-80	3.05
80-90	0.35
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00

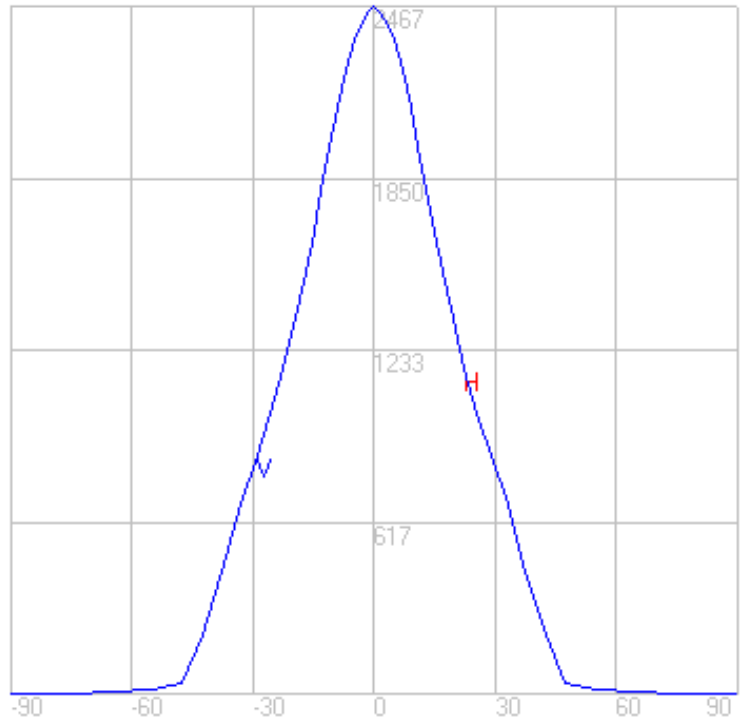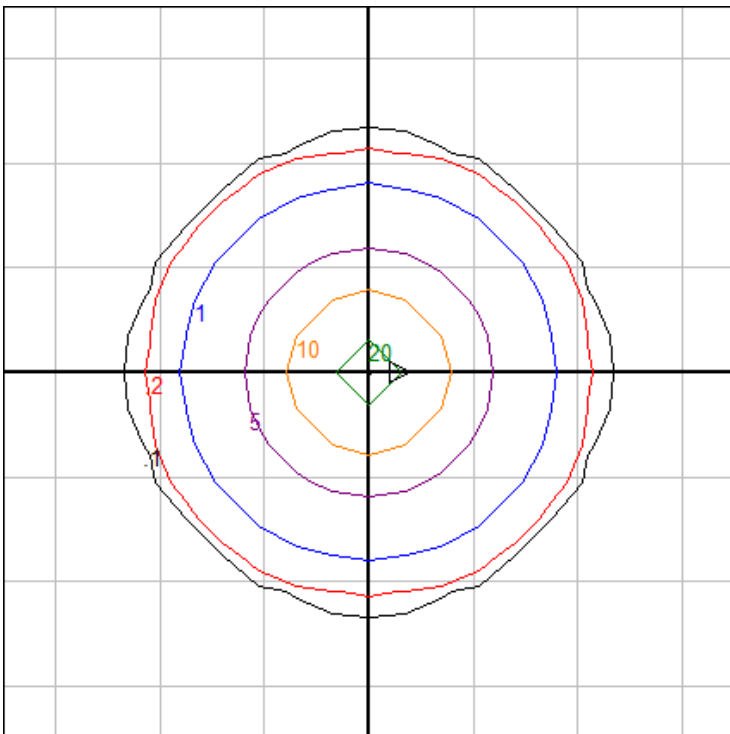

Ceiling Mounting Height: 10 ft. Grid Spacing: 5 ft.

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.


BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2020

06/25/2020

BEGA

File: 50676.2K27_BEGA_IES.ies

TEST: BE_50676.2K3
 TEST LAB: BEGA
 DATE: 11/29/2018
 LUMINAIRE: 50 676.2K27
 LAMP: 17.0W LED


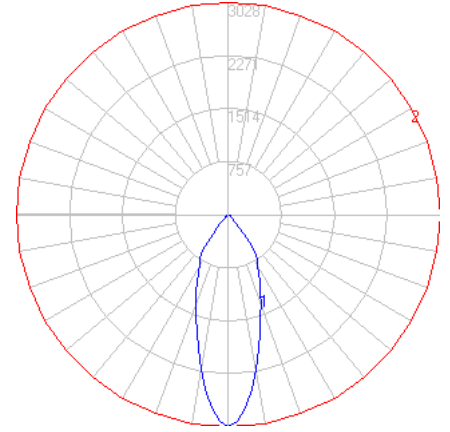


Characteristics

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	1791
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	90
Total Luminaire Watts	20
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	0.56
Spacing Criterion (90-270)	0.56
Spacing Criterion (Diagonal)	0.68
Basic Luminous Shape	Circular
Luminous Length (0-180)	0.00 ft
Luminous Width (90-270)	0.52 ft (Diameter)
Luminous Height	0.00 ft

Zonal Lumen Summary

Zone	Lumens
0-10	247.45
10-20	484.90
20-30	489.46
30-40	401.99
40-50	90.70
50-60	33.70
60-70	26.84
70-80	13.26
80-90	2.34
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00

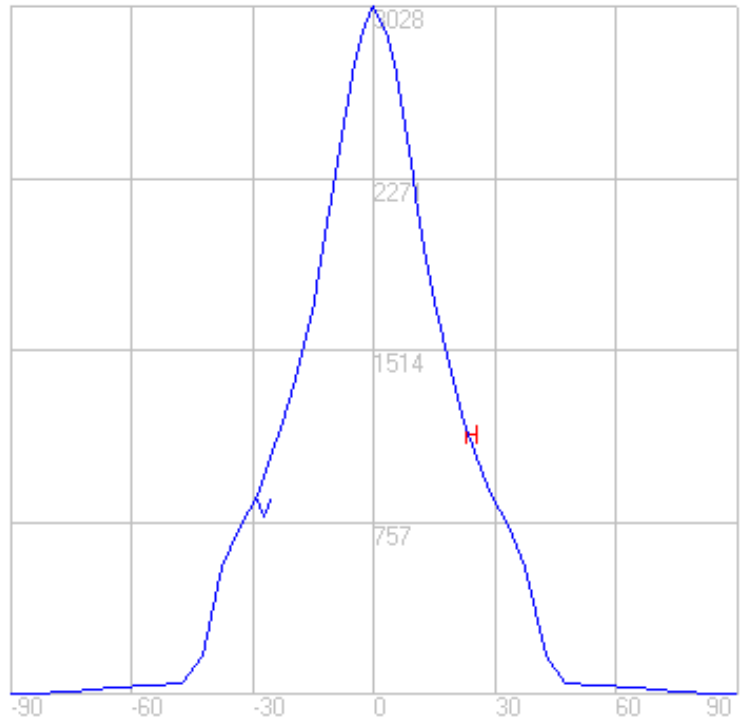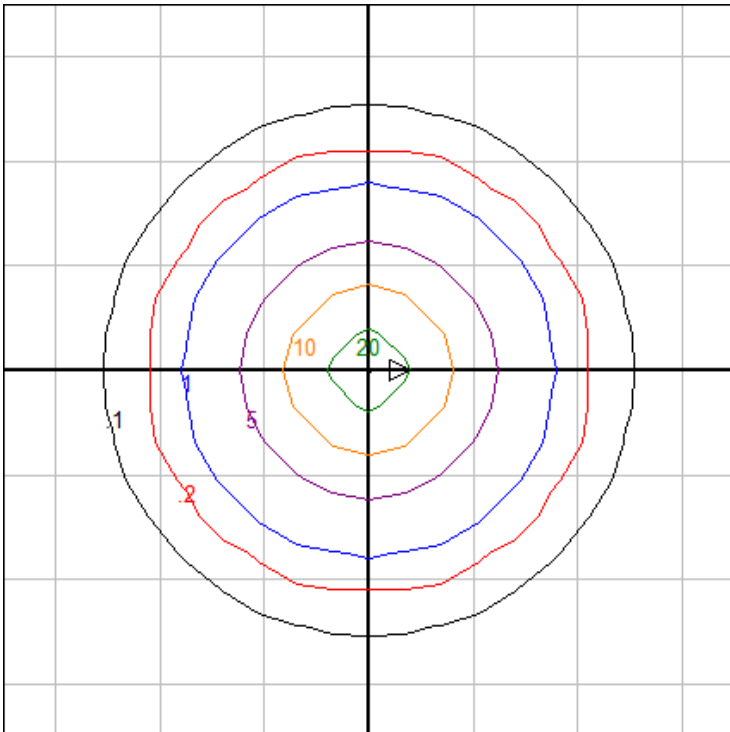

Ceiling Mounting Height: 10 ft. Grid Spacing: 5 ft.

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.



BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2020

06/25/2020

BEGA

File: 50676.4K27_BEGA_IES.ies

TEST: BE_50676.4K3
 TEST LAB: BEGA
 DATE: 11/29/2018
 LUMINAIRE: 50 676.4K27
 LAMP: 17.0W LED

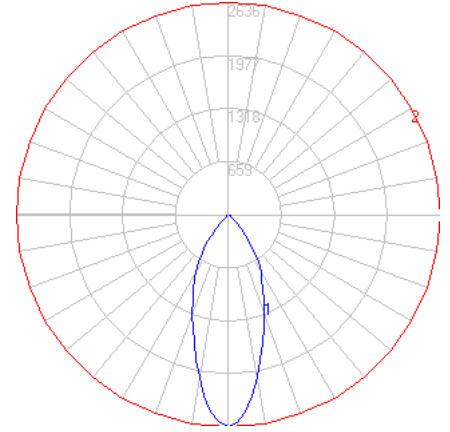
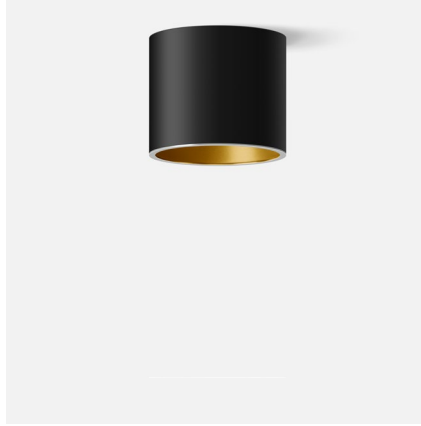


Characteristics

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	1665
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	83
Total Luminaire Watts	20
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	0.62
Spacing Criterion (90-270)	0.62
Spacing Criterion (Diagonal)	0.72
Basic Luminous Shape	Circular
Luminous Length (0-180)	0.00 ft
Luminous Width (90-270)	0.52 ft (Diameter)
Luminous Height	0.00 ft

Zonal Lumen Summary

Zone	Lumens
0-10	222.03
10-20	460.62
20-30	472.98
30-40	353.07
40-50	112.43
50-60	22.81
60-70	14.39
70-80	5.75
80-90	1.01
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00

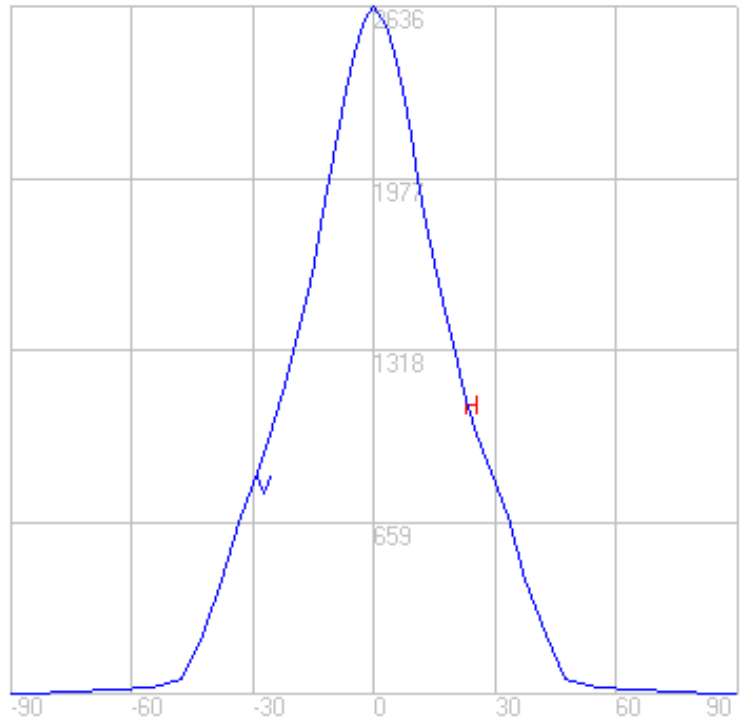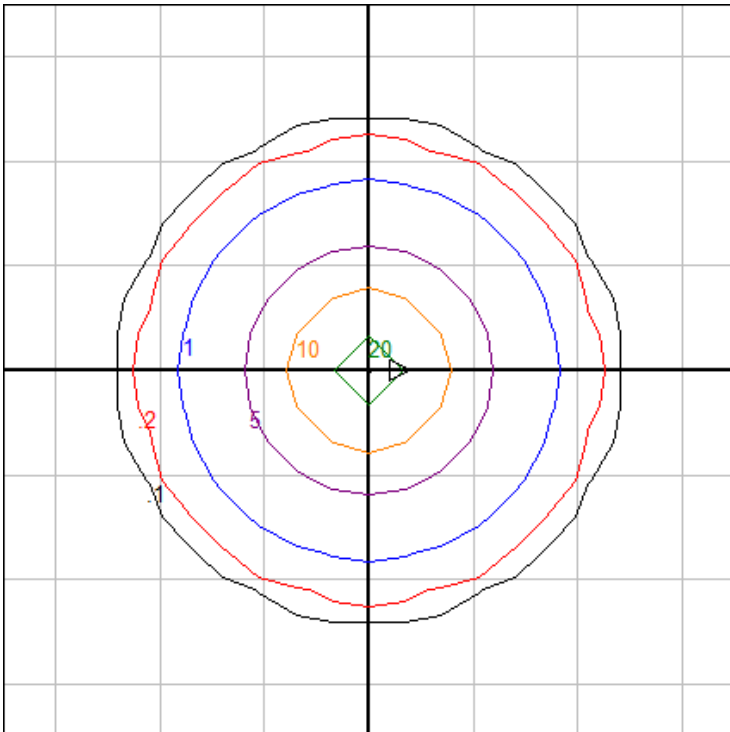



Ceiling Mounting Height: 10 ft. Grid Spacing: 5 ft.

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

BEGA

File: 50676.6K27_BEGA_IES.ies

TEST: BE_50676.6K3
 TEST LAB: BEGA
 DATE: 11/29/2018
 LUMINAIRE: 50 676.6K27
 LAMP: 17.0W LED

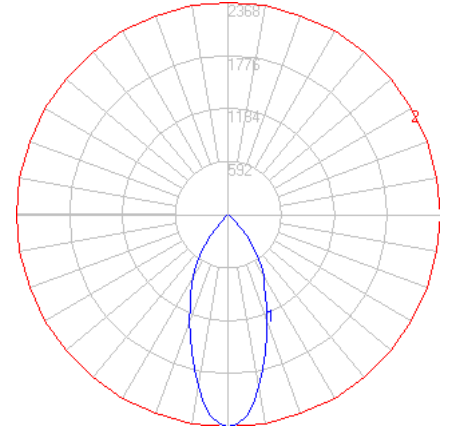
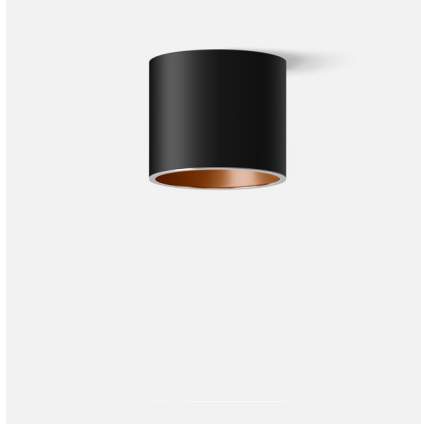


Characteristics

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	1566
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	78
Total Luminaire Watts	20
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	0.66
Spacing Criterion (90-270)	0.66
Spacing Criterion (Diagonal)	0.76
Basic Luminous Shape	Circular
Luminous Length (0-180)	0.00 ft
Luminous Width (90-270)	0.52 ft (Diameter)
Luminous Height	0.00 ft

Zonal Lumen Summary

Zone	Lumens
0-10	205.78
10-20	443.44
20-30	457.83
30-40	340.75
40-50	94.94
50-60	11.86
60-70	7.83
70-80	2.93
80-90	0.34
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00

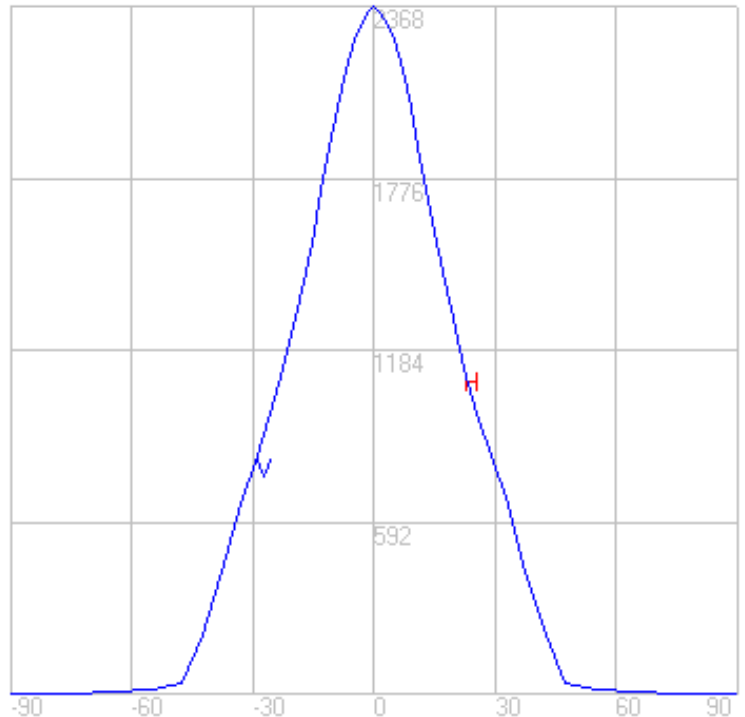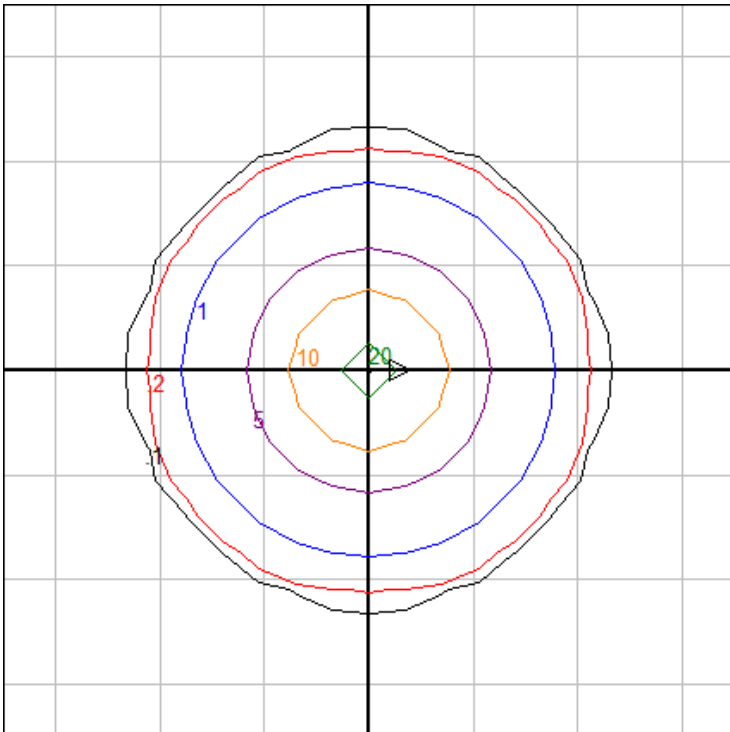

Ceiling Mounting Height: 10 ft. Grid Spacing: 5 ft.

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2020

06/25/2020