

Application

Optimally designed for glare-free illumination of offices, conference rooms, classrooms, and similar interior space types. Edge lit, micro-structured acrylic panels efficiently direct the light resulting in a glare-free light source with a high degree of visual comfort.

Materials

Optically textured UV-stabilized acrylic diffuser
 Marine grade, copper free ($\leq 0.3\%$ copper content) A360.0 aluminum alloy
 Stainless steel suspension cable

NRTL listed to North American Standards, for interior use only

Weight: 26.5 lbs.

Electrical

Operating voltage 120-277V AC
 Minimum start temperature -40° C
 LED module wattage 52.6 W
 System wattage 60.0 W
 Controllability 0-10V dimmable
 Color rendering index Ra > 80
 Luminaire lumens 6722 lm
 LED service life (L70) 60000 hrs


LED color temperature

- 4000K (K4)
- 3500K (K35)
- 3000K (K3)
- 2700K (K27)

BEGA can supply you with suitable LED replacement modules for up to 20 years after the purchase of LED luminaires - see website for details

Finish

Matte aluminum finish with continuous matte black strip.

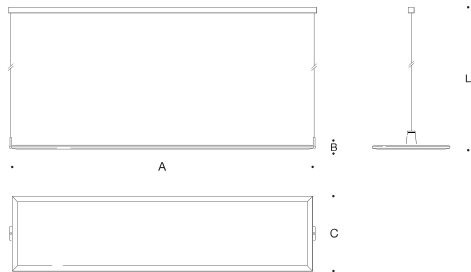

Edge-lit suspended luminaire · Direct

	LED	A	B	C	D
B56625	52.6 W	61 ³ / ₄	0 ³ / ₄	13 ¹ / ₂	79

Type:
 BEGA Product:
 Project:
 Modified:

Included (available for pre-shipment)
 B19537 Narrow opening wiring box

