


BEGA

Photometric Filename: 66982.IES

TEST: BE_66982
 TEST LAB: BEGA
 DATE: 3/20/2017
 LUMINAIRE: 66 982
 LAMP: 10W LED

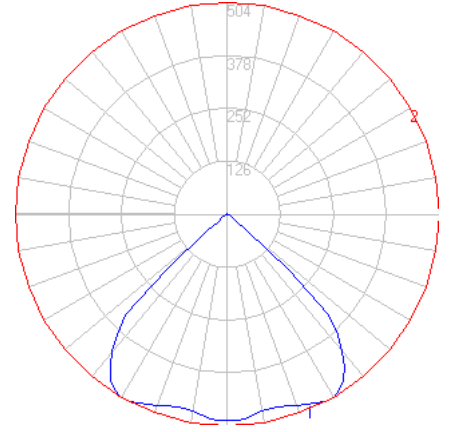


Characteristics


| | |
|---------------------------------|--------------------|
| Lumens Per Lamp | N.A. (absolute) |
| Total Lamp Lumens | N.A. (absolute) |
| Luminaire Lumens | 954 |
| Total Luminaire Efficiency | N.A. |
| Luminaire Efficacy Rating (LER) | 79 |
| Total Luminaire Watts | 12 |
| Ballast Factor | 1.00 |
| CIE Type | Direct |
| Spacing Criterion (0-180) | 1.48 |
| Spacing Criterion (90-270) | 1.48 |
| Spacing Criterion (Diagonal) | 1.42 |
| Basic Luminous Shape | Circular |
| Luminous Length (0-180) | 0.00 ft |
| Luminous Width (90-270) | 0.40 ft (Diameter) |
| Luminous Height | 0.00 ft |

Characteristics

| | |
|------------------------------|-----------------|
| NEMA Type | 5 H x 6 V |
| Maximum Candela | 504.1 |
| Maximum Candela Angle | -29 H -7 V |
| Horizontal Beam Angle (50%) | 76.3 |
| Vertical Beam Angle (50%) | 91.2 |
| Horizontal Field Angle (10%) | 89.0 |
| Vertical Field Angle (10%) | 106.7 |
| Lumens Per Lamp | N.A. (absolute) |
| Total Lamp Lumens | N.A. (absolute) |
| Beam Lumens | 876 |
| Beam Efficiency | N.A. |
| Field Lumens | 944 |
| Field Efficiency | N.A. |
| Spill Lumens | 15 |
| Luminaire Lumens | 959 |
| Total Efficiency | N.A. |
| Total Luminaire Watts | 12 |

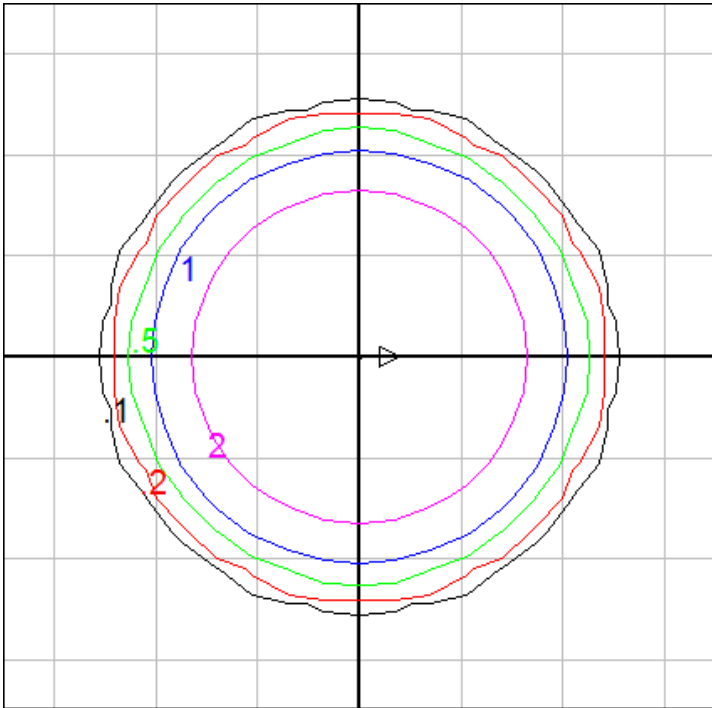

Mounting Height = 10 ft. Grid Spacing = 5 ft.

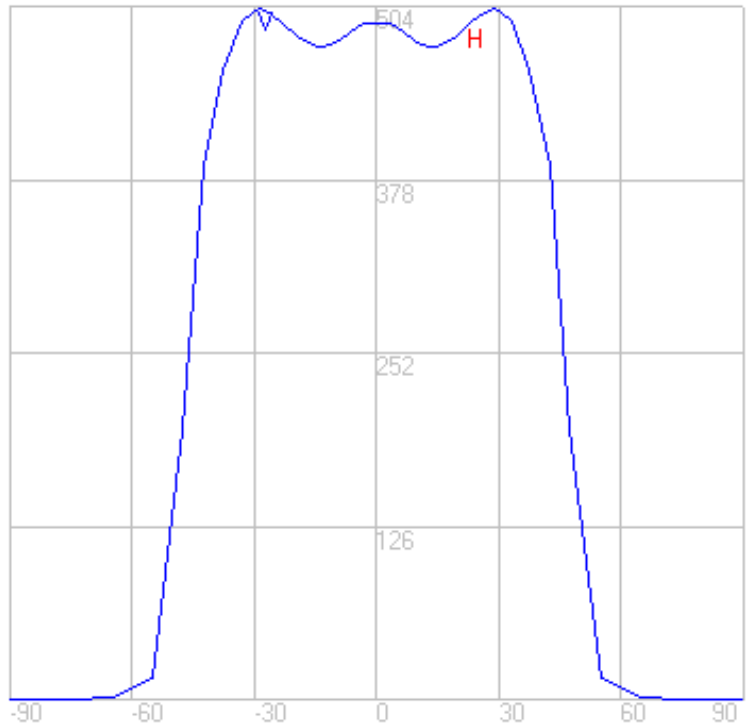

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.