

Application

Compact floodlight with mounting canopy for direct mounting to horizontal or vertical surfaces. Designed to illuminate architectural features, signage, landscaping, or to provide general illumination in a space. Pair with a variety of optical accessories.

Materials

- Clear safety glass
- Marine grade, copper free (≤0.3% copper content) A360.0 aluminum alloy
- High temperature silicone gasket
- Mechanically captive stainless steel fasteners
- Pure anodized aluminum reflector
- Silicone optic with excellent high temperature and UV stability
- Composite concentric ring louver

NRTL listed to North American Standards, suitable for wet locations
 Protection class IP 65

Weight: 3.5 lbs.

EPA (Effective projection area): 0.3 sq. ft.

Electrical

Operating voltage	120, 220-240 OR 277 VAC
Minimum start temperature	-30° C
LED module wattage	13.0W
System wattage	14.9W
Controllability	0-10V dimmable
Color rendering index	Ra > 80
Luminaire lumens	675lm
LED service life (L70)	60000hrs

LED color temperature

- 4000K (K4)
- 3500K (K35)
- 3000K (K3)
- 2700K (K27)

BEGA can supply you with suitable LED replacement modules for up to 20 years after the purchase of LED luminaires - see website for details

Finish

All BEGA standard finishes are matte, textured powder coat with minimum 3 mil thickness. BEGA Unidure® finish, a fluoropolymer technology, provides superior fade protection in Black, Bronze, and Silver. BEGA standard White is a super durable polyester powder. Optionally available RAL and custom color finishes provided in either polyester powder or liquid paint.

Available colors

- | | |
|--------------|--------------|
| Black (BLK) | Bronze (BRZ) |
| Silver (SLV) | White (WHT) |
| RAL: | CUS: |

Type:



BEGA Product:

Project:

Modified:

Available options

- | | |
|--------|------------------------|
| B70075 | Elliptical spread lens |
| B70712 | Glare shield · 360° |
| B70756 | Glare shield · 180° |
| CUS | Custom finish |
| FSC | Fusing |
| MGU | Marine grade undercoat |
| RAL | RAL finish |

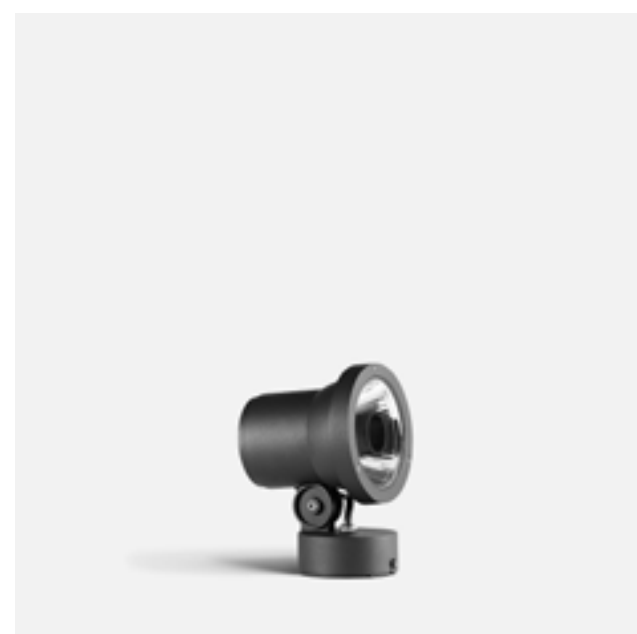

Compact floodlight · Very narrow beam						
	LED	□	A	B	C	D
B77680	13.0W	8°	5 1/2	8	5 1/2	3 7/8