

Application

Linear in-grade floodlight with symmetric light distribution. Designed to illuminate architectural features such as building overhangs. These luminaires are designed to bear pressure loads up to 2200 lbs. from vehicles with pneumatic tires. The luminaires must not be used for traffic lanes where they are subject to horizontal pressure from vehicles braking, accelerating and changing direction.

Materials

Corrosion-resistant 304 grade stainless steel
 High temperature silicone gasket
 Aluminum installation housing
 Pure anodized aluminum reflector

NRTL listed to North American Standards, suitable for wet locations
 Protection class IP 67

Weight: 16.3lbs.

Electrical

Operating voltage 120-277V AC
 Minimum start temperature -30° C
 LED module wattage 9.4 W
 System wattage 13.0W
 Controllability 0-10V dimmable
 Color rendering index Ra > 80
 Luminaire lumens 1360 lm
 LED service life (L70) 60000 hrs

LED color temperature

- 4000K (K4)
- 3500K (K35)
- 3000K (K3)
- 2700K (K27)

BEGA can supply you with suitable LED replacement modules for up to 20 years after the purchase of LED luminaires - see website for details

Finish

#4 brushed stainless steel. Custom colors are not available.

Type:

BEGA Product:

Project:


Modified:

Available options

FSC Fusing

Included (available for pre-shipment)

BB7915LED Installation housing

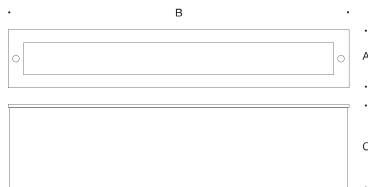

In-grade luminaire · Symmetric

	LED	A	B	C
B77915	9.4 W	3 1/2	20 7/8	5

