


BEGA

Photometric Filename: 88263.IES

TEST: NA
 TEST LAB: BEGA
 DATE: 06/26/2014
 LUMINAIRE: 88 263
 LAMP: 25.2W LED

All results in accordance with IESNA LM-63-95




Characteristics

IES Classification	Type V
Longitudinal Classification	Very Short
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	2380
Downward Total Efficiency	N.A.
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	79
Total Luminaire Watts	30
Ballast Factor	1.00
Upward Waste Light Ratio	0.01
Max. Cd.	772.8 (0H, 17.5V)
Max. Cd. (<90 Vert.)	772.8 (0H, 17.5V)
Max. Cd. (At 90 Deg. Vert.)	39.4 (1.7%Lum)
Max. Cd. (80 to <90 Deg. Vert.)	125 (5.3%Lum)
Cutoff Classification (deprecated)	N.A. (absolute)


Lum. Classification System (LCS)

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	300.6	N.A.	12.6
FM (30-60)	590.6	N.A.	24.8
FH (60-80)	245.4	N.A.	10.3
FVH(80-90)	42.7	N.A.	1.8
BL (0-30)	300.6	N.A.	12.6
BM (30-60)	590.6	N.A.	24.8
BH (60-80)	245.4	N.A.	10.3
BVH(80-90)	42.7	N.A.	1.8
UL (90-100)	18.1	N.A.	0.8
UH (100-180)	2.9	N.A.	0.1
Total	2379.6	N.A.	100.0

BUG Rating B1-U2-G1

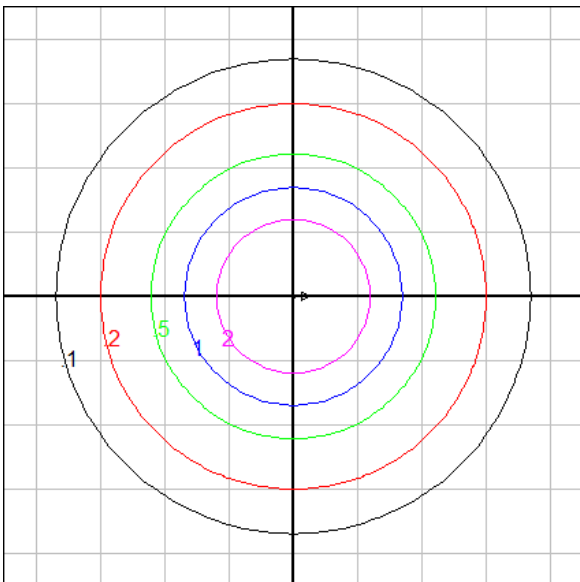

Mounting Height = 12 ft. Grid Spacing = 8 ft.

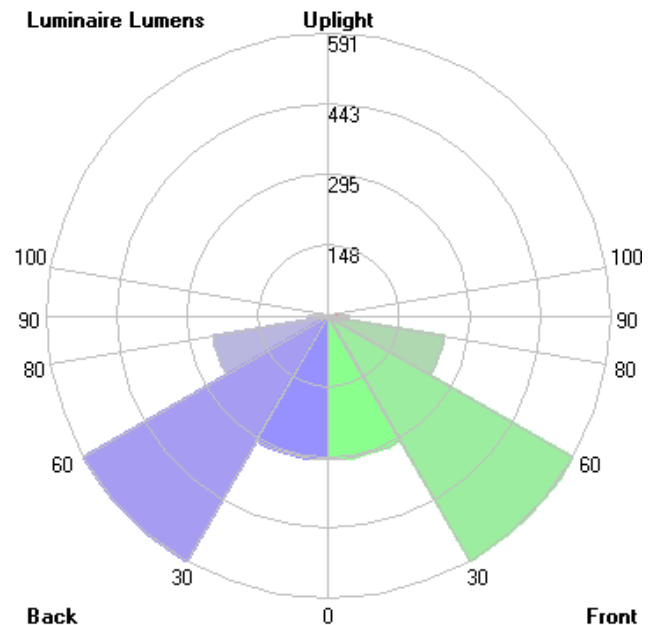

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.