


# BEGA

Photometric Filename: 22697.ies

TEST: BE\_22697  
 TEST LAB: BEGA  
 DATE: 12/9/2016  
 LUMINAIRE: 22 697  
 LAMP: 3.9W LED

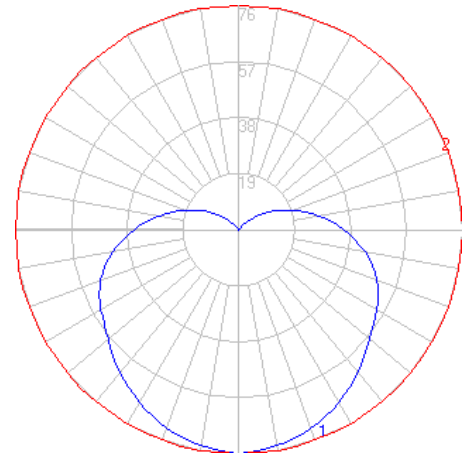


### Characteristics


Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	331
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	55
Total Luminaire Watts	6
Ballast Factor	1.00
CIE Type	Semi-Direct
Spacing Criterion (0-180)	1.34
Spacing Criterion (90-270)	1.20
Spacing Criterion (Diagonal)	1.40
Basic Luminous Shape	Rectangular w/Sides
Luminous Length (0-180)	0.49 ft
Luminous Width (90-270)	0.85 ft
Luminous Height	0.26 ft

### Zonal Lumen Summary

Zone	Lumens
0-10	7.13
10-20	20.21
20-30	30.62
30-40	37.54
40-50	40.77
50-60	40.77
60-70	38.57
70-80	34.35
80-90	28.63
90-100	22.08
100-110	15.29
110-120	9.23
120-130	4.44
130-140	1.30
140-150	0.07
150-160	0.00
160-170	0.00
170-180	0.00

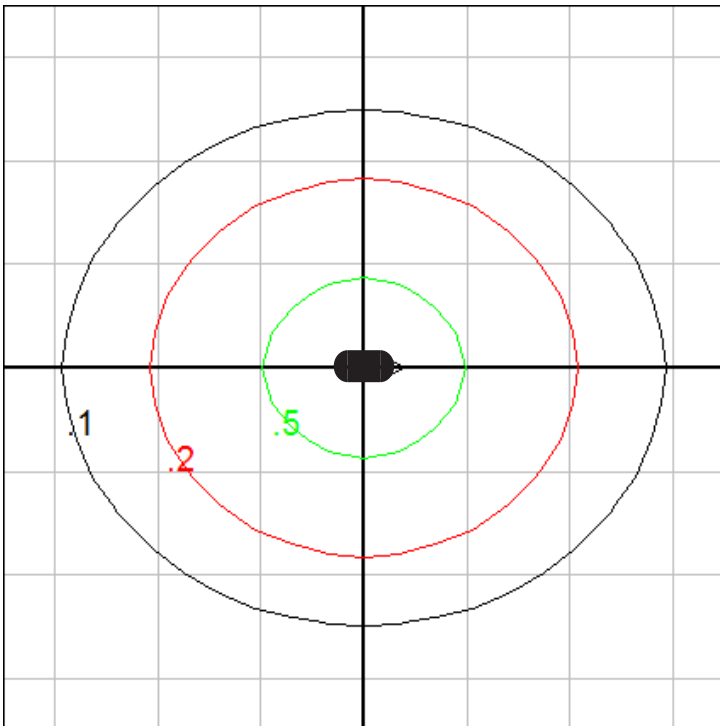

Ceiling Mount - Isofootcandle grid on floor  
 Mounting Height = 5 ft. Grid Spacing = 5 ft.

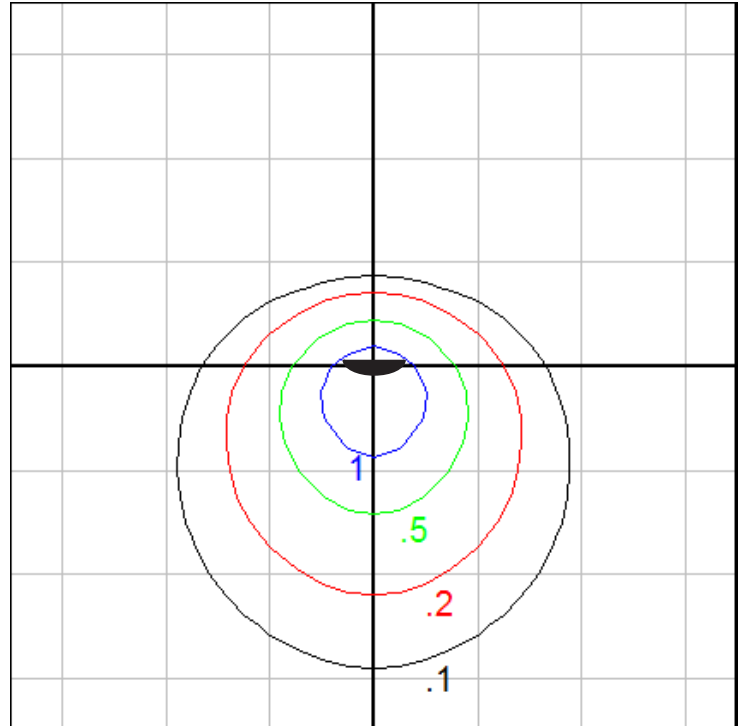

Wall Mount - Isofootcandle grid on floor  
 Mounting Height = 5 ft. Grid Spacing = 5 ft.

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.