

Application

BEGA wooden poles soften the built environment by using natural materials of the highest quality. Compatible with pole top luminaires that slip fit 3in. O.D. tenon.

Materials

Glue-laminated, Scots pine heartwood (<10% sapwood)
 All timber sourced from FSC or PEFC sustainably managed forests, minimum 80 year growth and 250mm diameter trees
 Fumigation and anti-termite treated
 Water based wood stain
 High-temperature glue used for lamination
 Base and anchorage constructed of steel
 316 grade stainless steel screws







CE Certified, certificate 0679-CPR-0473

Weight: 93 lbs.

Contractor to provide NRTL listed raceway or conduit from pole tenon to hand hole.

Wood Finish

All poles are finished smooth with three coats of wood stain to both color and protect the wood, optionally available with a brushed finish. BEGA can supply you with wood stain for maintenance up to 20 years after purchase.

Available colors		Brume
		Chestnut
		Tyrol Pine
		Ferrare Oak
		Copper
		Rustic (brushed)
		Light Mineral
		Dark Mineral
		Original Mineral

Metal Finish

All BEGA standard paint finishes are matte, textured polyester powder coat with minimum 3 mil thickness.

Available colors	Black (BLK)	Bronze (BRZ)	Silver (SLV)
	RAL:	CUS:	

Disclaimer

BEGA North America warrants the specific anchor bolts and pole combination according to the product number(s) and description(s) indicated on this submittal sheet. Structural changes to the pole requested by the customer, including changes to pole length, may affect the compatibility of the anchor bolts and corresponding poles. BEGA North America is not responsible for the incompatibility of the anchor bolts and poles resulting from such structural changes without review by the BEGA North America engineering department. This includes, but is not limited to, any labor charges, charges for replacement materials and shipping.

Type:


BEGA Product:

Project:

Modified:

Luminaire:

Luminaire EPA:

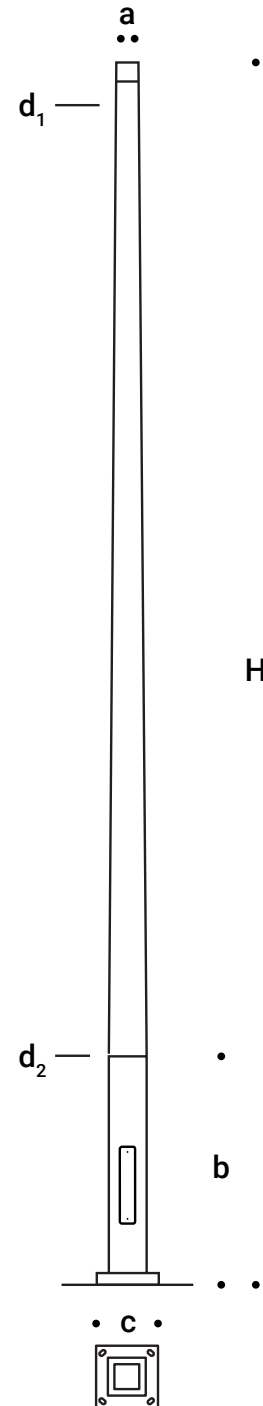

Wooden pole - Square tapered							Pole wind load rating						
	H	a	b	c	d ₁	d ₂	Anchorage	MPH	70	80	90	100	120
98 518	200 ⁷ / ₈	3	47 ¹ / ₄	10 ⁵ / ₈	3	5 ¹ / ₂	79 826	EPA	36.6	27.6	21.5	16.8	10.2

Note: Data above assumes grade level installation and a maximum luminaire weight of 50 lbs.

BEGA 1000 BEGA Way, Carpinteria, CA 93013 (805) 684-0533 info@bega-us.com