


BEGA

Photometric Filename: 12277.IES

TEST: LI_12277
 TEST LAB: BEGA
 DATE: 8/26/2015
 LUMINAIRE: 12 277.X
 LAMP: 8.4W LED

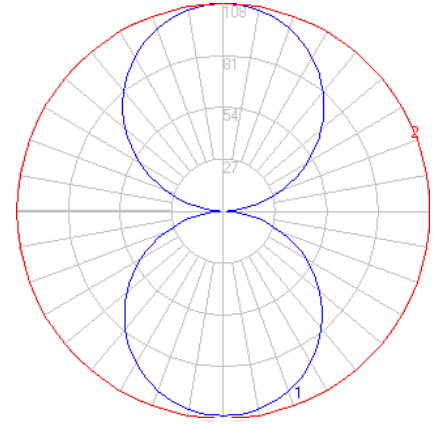


Characteristics


Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	649
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	59
Total Luminaire Watts	11
Ballast Factor	1.00
CIE Type	General Diffuse
Spacing Criterion (0-180)	N.A.
Spacing Criterion (90-270)	N.A.
Spacing Criterion (Diagonal)	N.A.
Basic Luminaire Shape	Rectangular w/Sides
Luminous Length (0-180)	0.23 ft
Luminous Width (90-270)	0.61 ft
Luminous Height	0.01 ft

Zonal Lumen Summary

Zone	Lumens
0-10	10.06
10-20	28.90
20-30	44.11
30-40	53.84
40-50	56.84
50-60	52.66
60-70	41.90
70-80	25.42
80-90	8.14
90-100	8.31
100-110	26.12
110-120	42.75
120-130	53.56
130-140	57.68
140-150	54.64
150-160	44.76
160-170	29.33
170-180	10.21

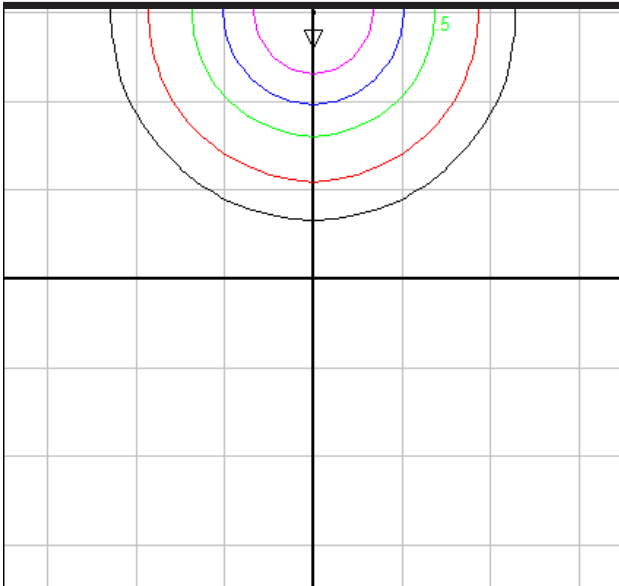

Mounting Height = 5 ft. Grid Spacing = 5 ft.
Isofootcandle grid on floor

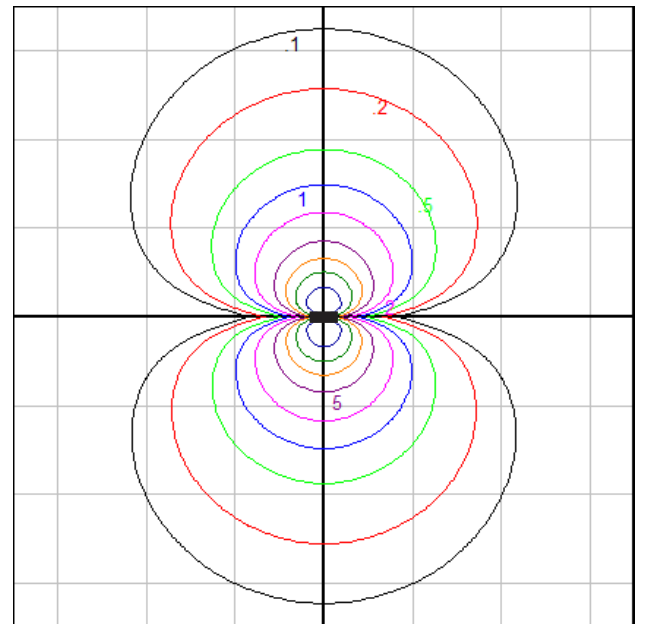

Grid Spacing = 2.5 ft.
Isofootcandle grid on wall

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.