


BEGA

Photometric Filename: 22686.ies

TEST: BE_22686
 TEST LAB: BEGA
 DATE: 9/21/2016
 LUMINAIRE: 22 686
 LAMP: 2.9W LED

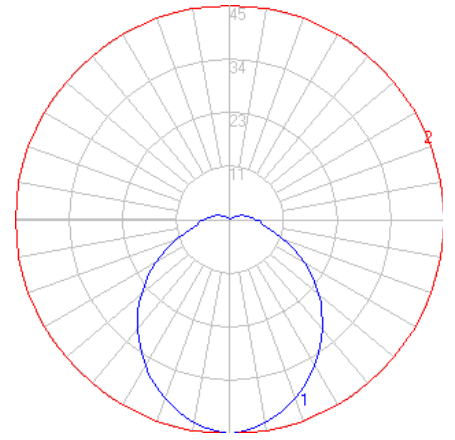


Characteristics


| | |
|---------------------------------|---------------------|
| Lumens Per Lamp | N.A. (absolute) |
| Total Lamp Lumens | N.A. (absolute) |
| Luminaire Lumens | 184 |
| Total Luminaire Efficiency | N.A. |
| Luminaire Efficacy Rating (LER) | 46 |
| Total Luminaire Watts | 4 |
| Ballast Factor | 1.00 |
| CIE Type | Semi-Direct |
| Spacing Criterion (0-180) | 1.32 |
| Spacing Criterion (90-270) | 1.18 |
| Spacing Criterion (Diagonal) | 1.38 |
| Basic Luminous Shape | Rectangular w/Sides |
| Luminous Length (0-180) | 0.33 ft |
| Luminous Width (90-270) | 0.62 ft |
| Luminous Height | 0.16 ft |

Zonal Lumen Summary

| Zone | Lumens |
|---------|--------|
| 0-10 | 4.25 |
| 10-20 | 12.01 |
| 20-30 | 18.07 |
| 30-40 | 21.94 |
| 40-50 | 23.51 |
| 50-60 | 23.16 |
| 60-70 | 21.57 |
| 70-80 | 18.70 |
| 80-90 | 15.05 |
| 90-100 | 11.28 |
| 100-110 | 7.61 |
| 110-120 | 4.42 |
| 120-130 | 1.96 |
| 130-140 | 0.44 |
| 140-150 | 0.01 |
| 150-160 | 0.00 |
| 160-170 | 0.00 |
| 170-180 | 0.00 |

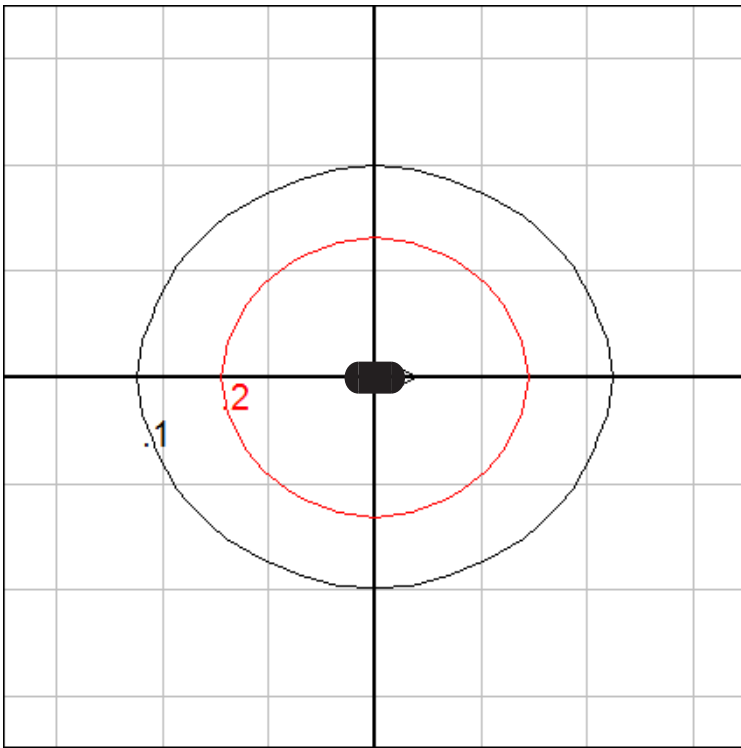

Ceiling Mount - Isofootcandle grid on floor
 Mounting Height = 10 ft. Grid Spacing = 5 ft.

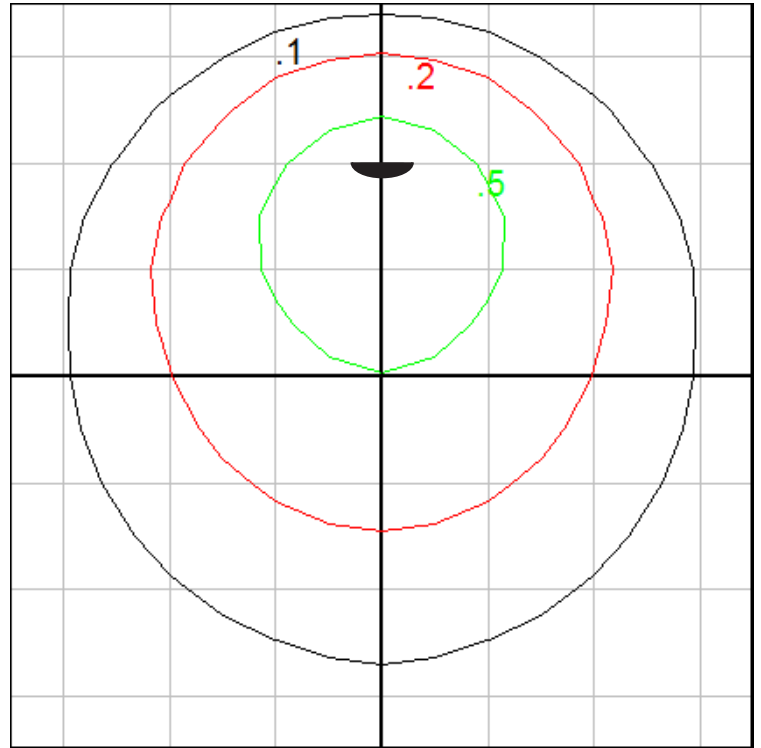

Wall Mount - Isofootcandle grid on floor
 Mounting Height = 5 ft. Grid Spacing = 2.5 ft.

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.