


BEGA

Photometric Filename: 24826.ies

TEST: BE_24826
 TEST LAB: BEGA
 DATE: 5/30/2017
 LUMINAIRE: 24 826
 LAMP: 16.8W LED

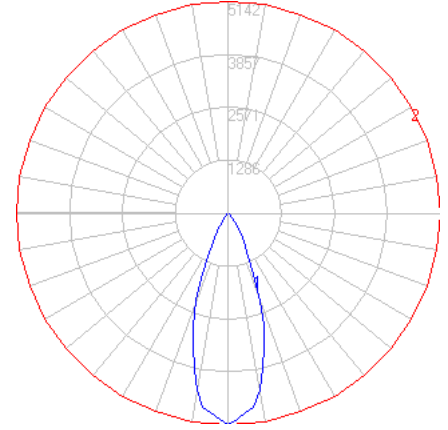


Characteristics


NEMA Type	4 H x 4 V
Maximum Candela	5142.2
Maximum Candela Angle	0 H 0 V
Horizontal Beam Angle (50%)	37.5
Vertical Beam Angle (50%)	37.5
Horizontal Field Angle (10%)	65.3
Vertical Field Angle (10%)	65.3
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Beam Lumens	1270
Beam Efficiency	N.A.
Field Lumens	2041
Field Efficiency	N.A.
Spill Lumens	236
Luminaire Lumens	2277
Total Efficiency	N.A.
Total Luminaire Watts	20

Zonal Lumen Summary

Zone	Lumens
0-10	453.00
10-20	921.03
20-30	571.44
30-40	240.13
40-50	62.37
50-60	22.07
60-70	2.43
70-80	0.21
80-90	0.11
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00

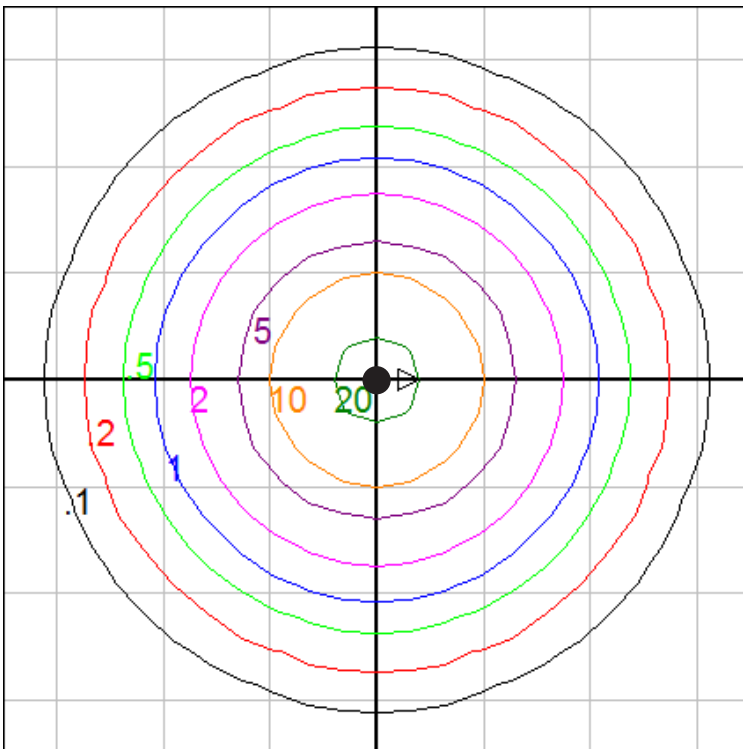

Mounting Height = 15 ft. Grid Spacing = 5 ft.

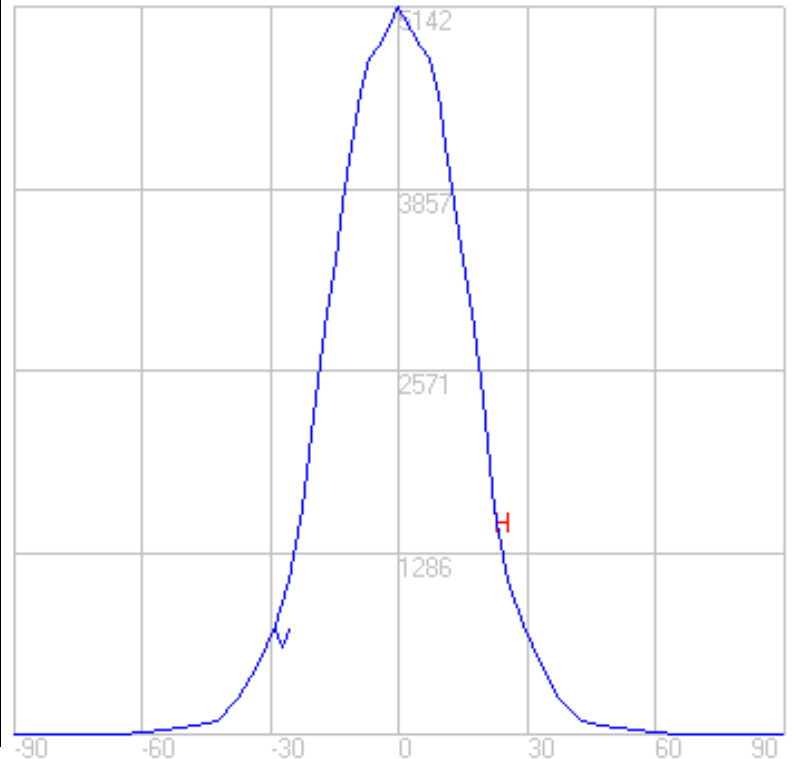

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.