
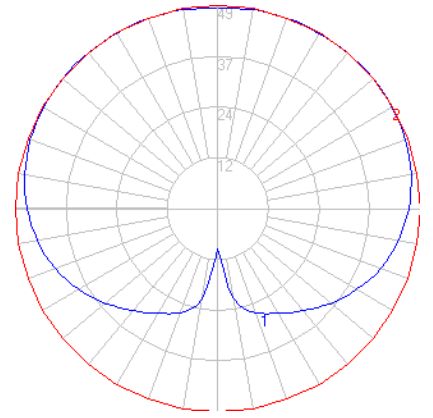


BEGA

Photometric Filename: 31218K3_BEGA_IES.IES

TEST: BE_31218
 TEST LAB: BEGA
 DATE: 6/14/2018
 LUMINAIRE: 31 218
 LAMP: 3.9W LED

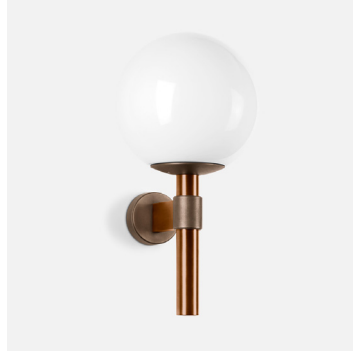


Characteristics


Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	537
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	49
Total Luminaire Watts	11
Ballast Factor	1.00
CIE Type	General Diffuse
Spacing Criterion (0-180)	N.A.
Spacing Criterion (90-270)	N.A.
Spacing Criterion (Diagonal)	N.A.
Basic Luminous Shape	Circular w/ Sides
Luminous Length (0-180)	0.00 ft
Luminous Width (90-270)	0.82 ft (Diameter)
Luminous Height	0.79 ft

Zonal Lumen Summary

Zone	Lumens
0-10	1.65
10-20	7.09
20-30	12.90
30-40	19.17
40-50	26.13
50-60	33.28
60-70	39.97
70-80	45.49
80-90	49.17
90-100	50.87
100-110	50.46
110-120	47.97
120-130	43.62
130-140	37.72
140-150	30.54
150-160	22.50
160-170	13.76
170-180	4.61

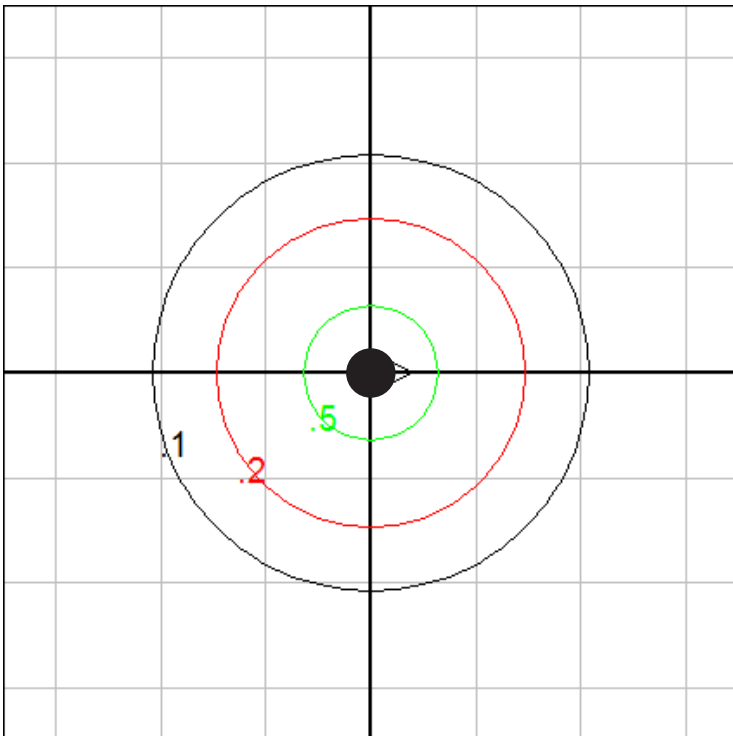

Wall Mount - Iso-grid on Floor
 Mounting Height = 5 ft. Grid Spacing = 5 ft.

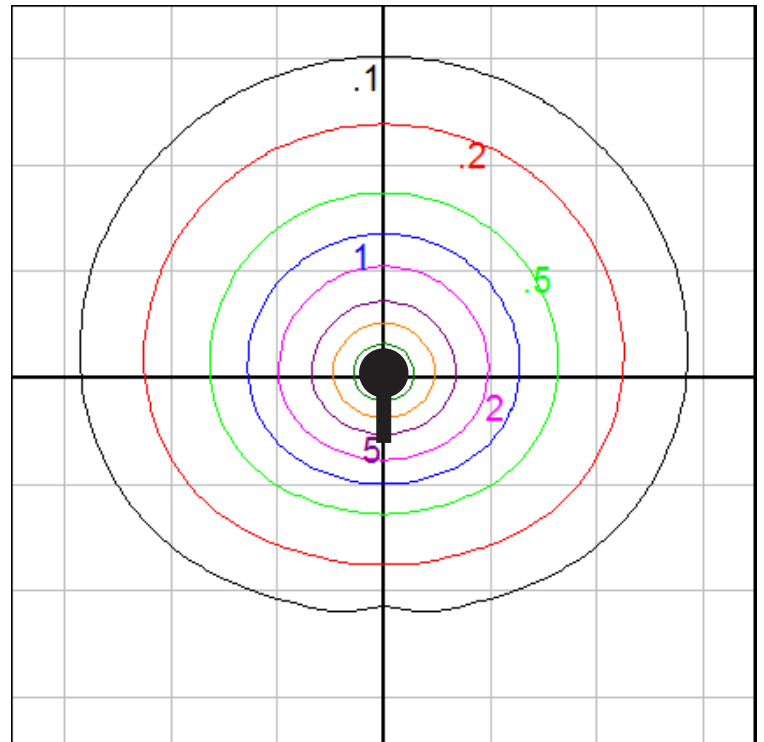

Wall Mount - Iso-grid on Wall Grid Spacing = 2.5 ft.

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.