


# BEGA

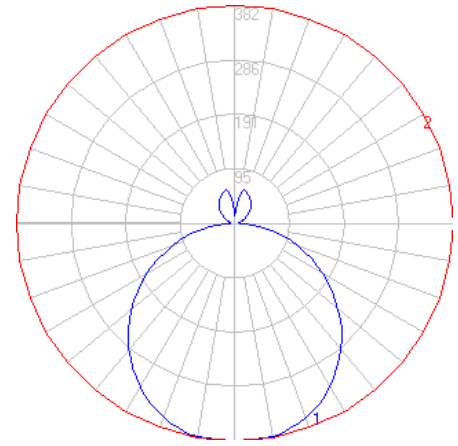

Photometric Filename: 34278.IES


TEST: BE\_34278  
 TEST LAB: BEGA  
 DATE: 5/12/2016  
 LUMINAIRE: 34 278  
 LAMP: 16.4W LED

### Characteristics


Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	1333
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	70
Total Luminaire Watts	19
Ballast Factor	1.00
CIE Type	Semi-Direct
Spacing Criterion (0-180)	1.30
Spacing Criterion (90-270)	1.30
Spacing Criterion (Diagonal)	1.40
Basic Luminous Shape	Circular w/ Sides
Luminous Length (0-180)	0.00 ft
Luminous Width (90-270)	1.12 ft (Diameter)
Luminous Height	0.02 ft

### Zonal Lumen Summary

Zone	Lumens
0-10	36.38
10-20	105.52
20-30	160.89
30-40	194.73
40-50	203.00
50-60	185.49
60-70	146.23
70-80	92.64
80-90	33.78
90-100	8.96
100-110	13.40
110-120	19.51
120-130	26.46
130-140	30.41
140-150	30.07
150-160	25.46
160-170	16.61
170-180	3.70

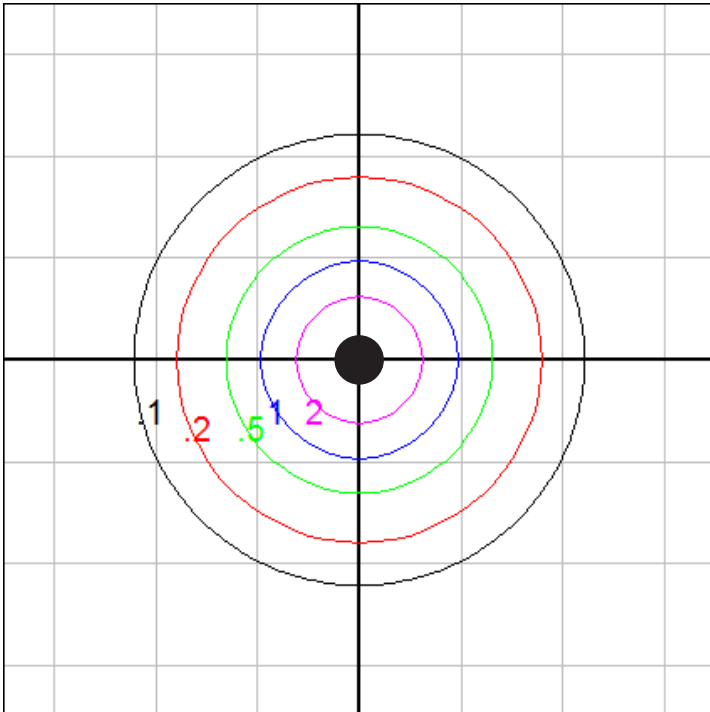

Ceiling Mount - Isofootcandle grid on floor  
 Mounting Height = 10 ft Grid Spacing = 10 ft.

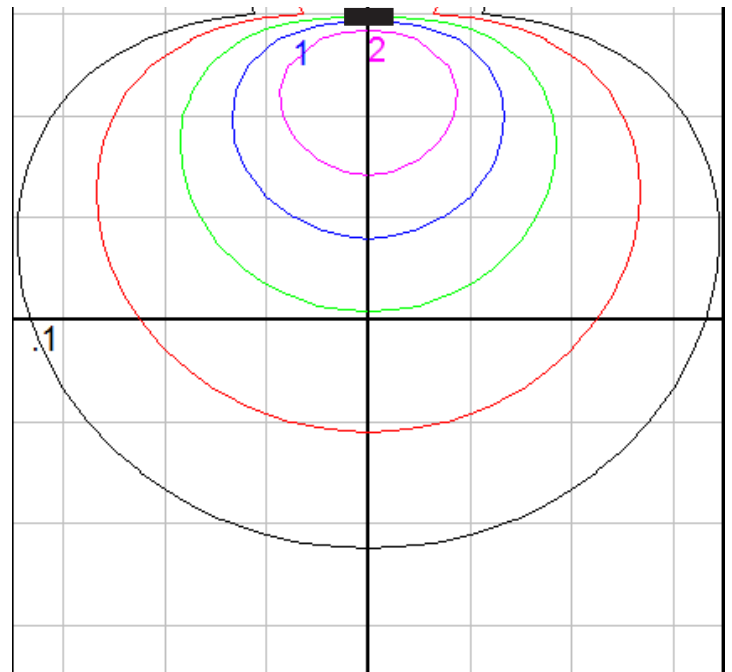

Wall Mount - Isofootcandle grid on floor  
 Mounting Height = 5 ft. Grid Spacing = 5 ft.

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.