


BEGA

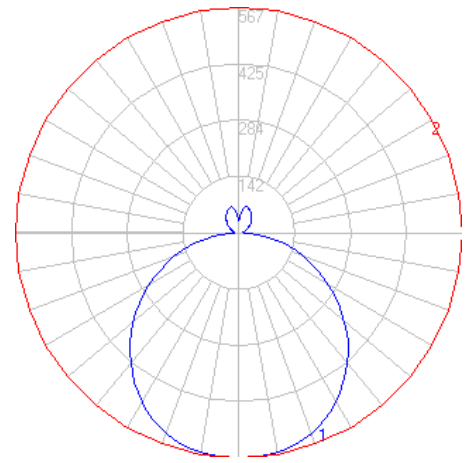

Photometric Filename: 34279.IES


TEST: BE_34279
 TEST LAB: BEGA
 DATE: 6/17/2016
 LUMINAIRE: 34 279
 LAMP: 25.9W LED

Characteristics


Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	1929
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	62
Total Luminaire Watts	31
Ballast Factor	1.00
CIE Type	Semi-Direct
Spacing Criterion (0-180)	1.30
Spacing Criterion (90-270)	1.30
Spacing Criterion (Diagonal)	1.40
Basic Luminous Shape	Circular w/ Sides
Luminous Length (0-180)	0.00 ft
Luminous Width (90-270)	1.29 ft (Diameter)
Luminous Height	0.05 ft

Zonal Lumen Summary

Zone	Lumens
0-10	53.99
10-20	156.37
20-30	238.65
30-40	289.00
40-50	301.48
50-60	275.77
60-70	217.92
70-80	137.69
80-90	49.93
90-100	13.18
100-110	17.41
110-120	23.86
120-130	30.91
130-140	35.04
140-150	34.65
150-160	29.46
160-170	18.75
170-180	4.50

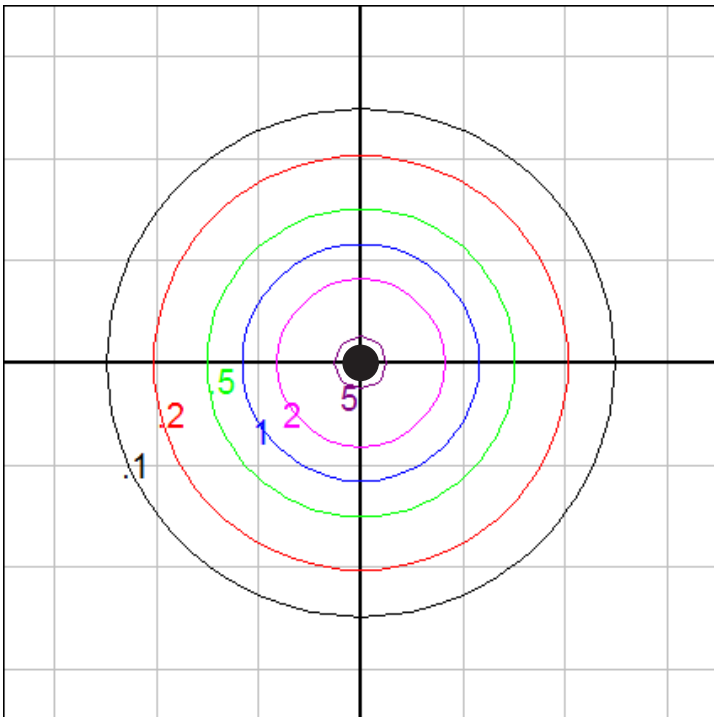

Ceiling mount - isofootcandle grid on floor
 Mounting Height = 10 ft Grid Spacing = 10 ft.

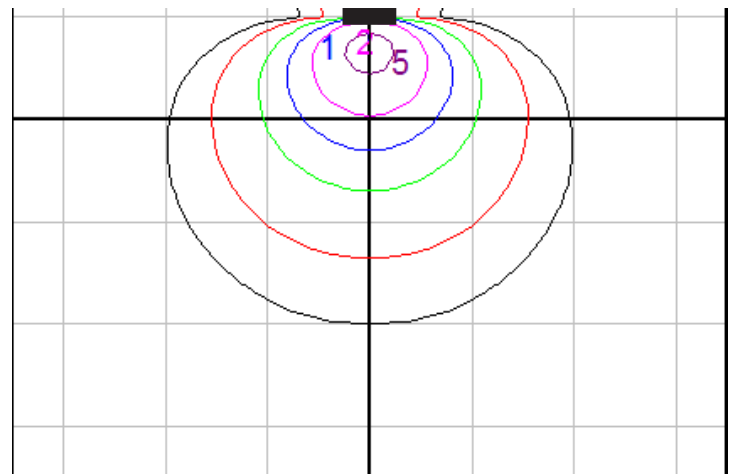

Wall mount - isofootcandle grid on floor
 Mounting Height = 5 ft. Grid Spacing = 10 ft.

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.